

FILL IN COMPLETELY DURING DRILLING , TAKE A NEW LINE AT ANY CHANGE.											CORRELATE SURVEYS TO DRILLING DEPTHS										UNITS								
CUSTOMER:		WEP		HOLE SIZE:		6 1/8"		 Weatherford DIRECTIONAL DRILLING REPORT NO.: 1										Av. ROP Sliding:				3.8 m/hr		DOGLEG:				%30m.	
CONTRACTOR:		BPC		Drilled sliding mtr.:		24												Av. WOB Sliding:				2.5 Tons		LENGTH:				Meter	
RIG:		Space Saver II		Sliding hours:		6.3												Av. ROP Rotary:				3.5 m/hr		PRESSURE:				Bar	
FIELD:		HonGT		Drilled rotary mtr.:		105												Av. WOB Rotary:				2.4 Tons		VOLUME:				Liter/ min.	
WELL:		HonGT01-S2		Rotary hours:		29.8												Total av. ROP:				3.6 m/hr		WEIGHT:				Tons	
WFT BHA:		2 page 1 of 2		Tot. mtr./hrs:		129 / 36.1												Total av. WOB:				2.4 Tons		Motor Speed				0.267	
DATE	DEPTH		Inter- val	TIME	ROP	RPM	RPM	Torque	WOB	FLOW	PRESSURE		FORMATION	TOOL -	MUD TYPE:					SURVEY	INCL.	AZI-	BUR	TURN	DLS	REMARKS			
2015	from	to		minutes	m/hr		tot	dNm		RATE	OFF	ON		FACE	SG	PV	YP	Filtrate	Sand	DEPTH		MUTH	%30m.	%30m.	%30m.				
20.05.	2393	2397	4	43	5.6	20	298	270	1.0	1040	168	174	clay/sandst.							2386.86	32.66	325.23				tie in surv			
	2397	2407	10	142	4.2	20	287	270	1.0	1000	152	158	"																
	2407	2409	2	31	3.9		278		1.0	1040	145	151	"	150 L															
	2409	2418	8.5	117	4.4	30	308	270	1.0	1040	145	153	"							2411.00	31.91	310.92	-0.9	-17.8	9.5				
	2418	2420	2.4	40	3.6		278		2.0	1040	140	152	"	160 L															
	2420	2427	7.4	102	4.4	30	308	270	2.0	1040	140	152	"		1.09	12	22	4	0.3	2421.00	31.56	313.74	-1.1	8.5	4.6				
	2427	2430	2.4	33	4.4		278		2.0	1040	140	154	"	LS															
	2430	2437	7.4	78	5.7	30	310	270	2.0	1050	141	154	sandstone							2431.00	30.55	324.90	-3.0	33.5	17.5				
	2437	2440	3	16	11.3	30	324	270	2.0	1100	161	177	"																
	2440	2443	3.1	25	7.4		294		2.0	1100	161	177	"	LS						2440.00	30.51	324.99	-0.1	0.3	0.2				
	2443	2447	3.7	45	4.9	30	324	270	2.0	1100	171	177	"																
	2447	2449	2.4	20	7.2	30	324	270	2.0	1100	171	178	"																
	2449	2453	4	63	3.8		294		3.0	1100	172	180	"	130 L						2450.00	30.33	318.66	-0.5	-19.0	9.6				
	2453	2457	3.4	73	2.8	30	324	270	3.0	1100	174	182	"																
	2457	2459	1.9	52	2.2	30	324	300	2.0	1100	173	182	"																
21.05.	2459	2460	1.1	32	2.1	30	324	300	2.0	1100	173	182	"		1.1	16	21	4	0.3										
	2460	2463	3.3	43	4.6		294		3.0	1100	173	188	"	135 L						2460.00	29.05	312.86	-3.8	-17.4	9.4				
	2463	2467	3.5	45	4.7	30	324	300	2.0	1100	175	186	"																
	2467	2470	3	41	4.4	30	324	300	2.0	1100	175	190	"																
	2470	2472	2.5	26	5.8		294		3.0	1100	176	185	"	LS						2470.00	28.09	310.75	-2.9	-6.3	4.2				
	2472	2476	4.3	82	3.1	30	324	300	2.0	1100	173	182	"																
	2476	2482	5.9	175	2.0	30	324	300	2.0	1100	174	183	"							2480.00	27.91	310.40	-0.5	-1.1	0.7				
	2482	2486	3.9	47	5.0	30	310	300	2.0	1050	163	170	"																
	2486	2491	4.7	130	2.2	30	310	210	3.0	1050	168	176	"		1.11	13	26	4	0.5	2489.00	28.48	310.66	1.9	0.9	1.9				
	2491	2496	5	83	3.6	30	310	340	4.0	1050	168	180	"																
	2496	2506	9.8	187	3.1	30	310	380	3.0	1050	168	180	"							2499.00	28.09	310.40	-1.2	-0.8	1.2				
	2506	2509	3.1	57	3.3	30	310	380	4.0	1050	171	183	"																
	2509	2510	1.3	36	2.2		280		3.0	1050	172	186	"	160 R						2509.00	27.16	309.69	-2.8	-2.1	3.0				
22.05.	2510	2511	1.2	34	2.1		280		2.0	1050	172	182	"	160 R															
	2511	2515	4.2	121	2.1	30	310	330	4.0	1050	172	184	"		1.11	13	27	4.1	0.5										
	2515	2520	4.6	100	2.8	30	310	330	4.0	1050	174	184	"							2519.00	26.64	309.96	-1.6	0.8	1.6				
	2520	2522	2	49	2.4		280		4.0	1050	174	184	"	90 R															

FILL IN COMPLETELY DURING DRILLING , TAKE A NEW LINE AT ANY CHANGE.											CORRELATE SURVEYS TO DRILLING DEPTHS										UNITS						
CUSTOMER:		WEP		HOLE SIZE:		6 1/8"		 Weatherford® DIRECTIONAL DRILLING REPORT NO.: 2										Av. ROP Sliding:		2.9		m/hr		DOGLEG:		%30m.	
CONTRACTOR:		BPC		Drilled sliding mtr.:		38												Av. WOB Sliding:		3.5		Tons		LENGTH:		Meter	
RIG:		Space Saver II		Sliding hours:		13.0												Av. ROP Rotary:		2.7		m/hr		PRESSURE:		Bar	
FIELD:		HonGT		Drilled rotary mtr.:		184												Av. WOB Rotary:		3.1		Tons		VOLUME:		Liter/ min.	
WELL:		HonGT01-S2		Rotary hours:		69.2		Total av. ROP:		2.7		m/hr		WEIGHT:		Tons											
WFT BHA:		2		page 2 of 2		Tot. mtr./hrs:		222		/		82.2		Total av. WOB:		3.3		Tons		Motor Speed		0.267					
DATE	DEPTH		Inter- val	TIME minutes	ROP m/hr	RPM	RPM tot	Torque dNm	WOB	FLOW RATE	PRESSURE OFF ON		FORMATION	TOOL - FACE	MUD TYPE:					SURVEY DEPTH	INCL.	AZI- MUTH	BUR %/30m.	TURN %/30m.	DLS %/30m.	REMARKS	
2015	from	to													SG	PV	YP	Filtrate	Sand								
22.05.	2522	2525	3.2	63	3.0	30	310	330	5.0	1050	174	188	clay/sandst														
	2525	2535	9.8	191	3.1	30	310	360	3.0	1050	176	188	sandst.,clay								2528.00	26.29	310.13	-1.2	0.6	1.2	relog.top Delft
	2535	2537	1.7	27	3.8	30	310	400	3.0	1050	176	184	"		1.12	11	32	4	0.5								
	2537	2541	4.5	150	1.8		280		5.0	1050	174	183	"	40 R							2538.00	26.86	311.36	1.7	3.7	2.4	
	2541	2545	3.6	79	2.7	30	310	380	4.0	1050	174	182	"														
	2545	2547	1.7	27	3.8	30	310	370	4.0	1050	174	184	"														
	2547	2551	4.2	74	3.4		280		6.0	1050	170	182	"	50 R	1.12	13	30	4	0.5		2548.00	27.43	313.65	1.7	6.9	3.6	
	2551	2552	1.7	37	2.8	30	310	410	4.0	1050	170	183	"														
23.05.	2552	2555	2.2	46	2.9	30	310	410	5.0	1050	170	185	"														
	2555	2557	2.1	44	2.9	30	310	400	4.0	1050	174	184	sandstone		1.12	13	29	4	0.5							work on pump	
	2557	2559	1.9	40	2.9	30	310	410	4.0	1050	170	186	"								2558.00	27.96	315.14	1.6	4.5	2.6	
	2559	2562	3	115	1.6		280		3.0	1050	171	187	"	45 R													
	2562	2564	2.8	53	3.2	30	310	410	3.0	1050	172	186	"														
	2564	2568	3.2	46	4.2	30	310	390	3.0	1050	179	189	"								2568.00	29.23	316.90	3.8	5.3	4.6	
	2568	2570	2.3	59	2.3		280		4.0	1050	176	189	"	HS													
	2570	2574	4.3	113	2.3	30	310	400	4.0	1050	176	188	"		1.13	13	29	4	0.5								
	2574	2584	9.8	357	1.6	30	310	420	4.0	1050	175	193	"								2577.00	29.63	317.25	1.3	1.2	1.5	
	2584	2587	3.1	141	1.3	30	313	400	3.0	1060	184	197	"								2587.00	29.58	317.34	-0.2	0.3	0.2	
24.05.	2587	2594	6.6	365	1.1	30	313	400	4.0	1060	184	200	"		1.13	13	34	4.2	0.5								
	2594	2604	9.9	318	1.9	30	308	410	4.0	1040	191	206	"								2597.00	29.85	317.52	0.8	0.5	0.9	
	2604	2613	9.7	339	1.7	30	310	410	4.0	1050	190	206	"		1.14	14	38	4.8	0.5								
	2613	2615	2	77	1.6	30	310	400	4.0	1050	191	204	"		1.14	13	35	4.6	0.5								
													TD														
																								</			

12:00 AM

12:10 AM

1000000

1000

1.50 AM

□ □ □ □ □

0:10 AM

0:00 AM

0:00 AM

2:40 AM

2:50 AM

2:00 AM

3:10 AM

3:30 AM


3:30 AM


3:40 AM


3:50 AM


[illegible]


										7:50 AM										
										8:00 AM										
										8:10 AM										
										8:20 AM										
										8:30 AM										
										8:40 AM										
										8:50 AM										
										9:00 AM										
										9:10 AM										
										9:20 AM										
										9:30 AM										
										9:40 AM										
										9:50 AM										
										10:00 AM										
										10:10 AM										
										10:20 AM										
										10:30 AM										
										10:40 AM										
										10:50 AM										
										11:00 AM										
										11:10 AM										
										11:20 AM										
										11:30 AM										
										11:40 AM										

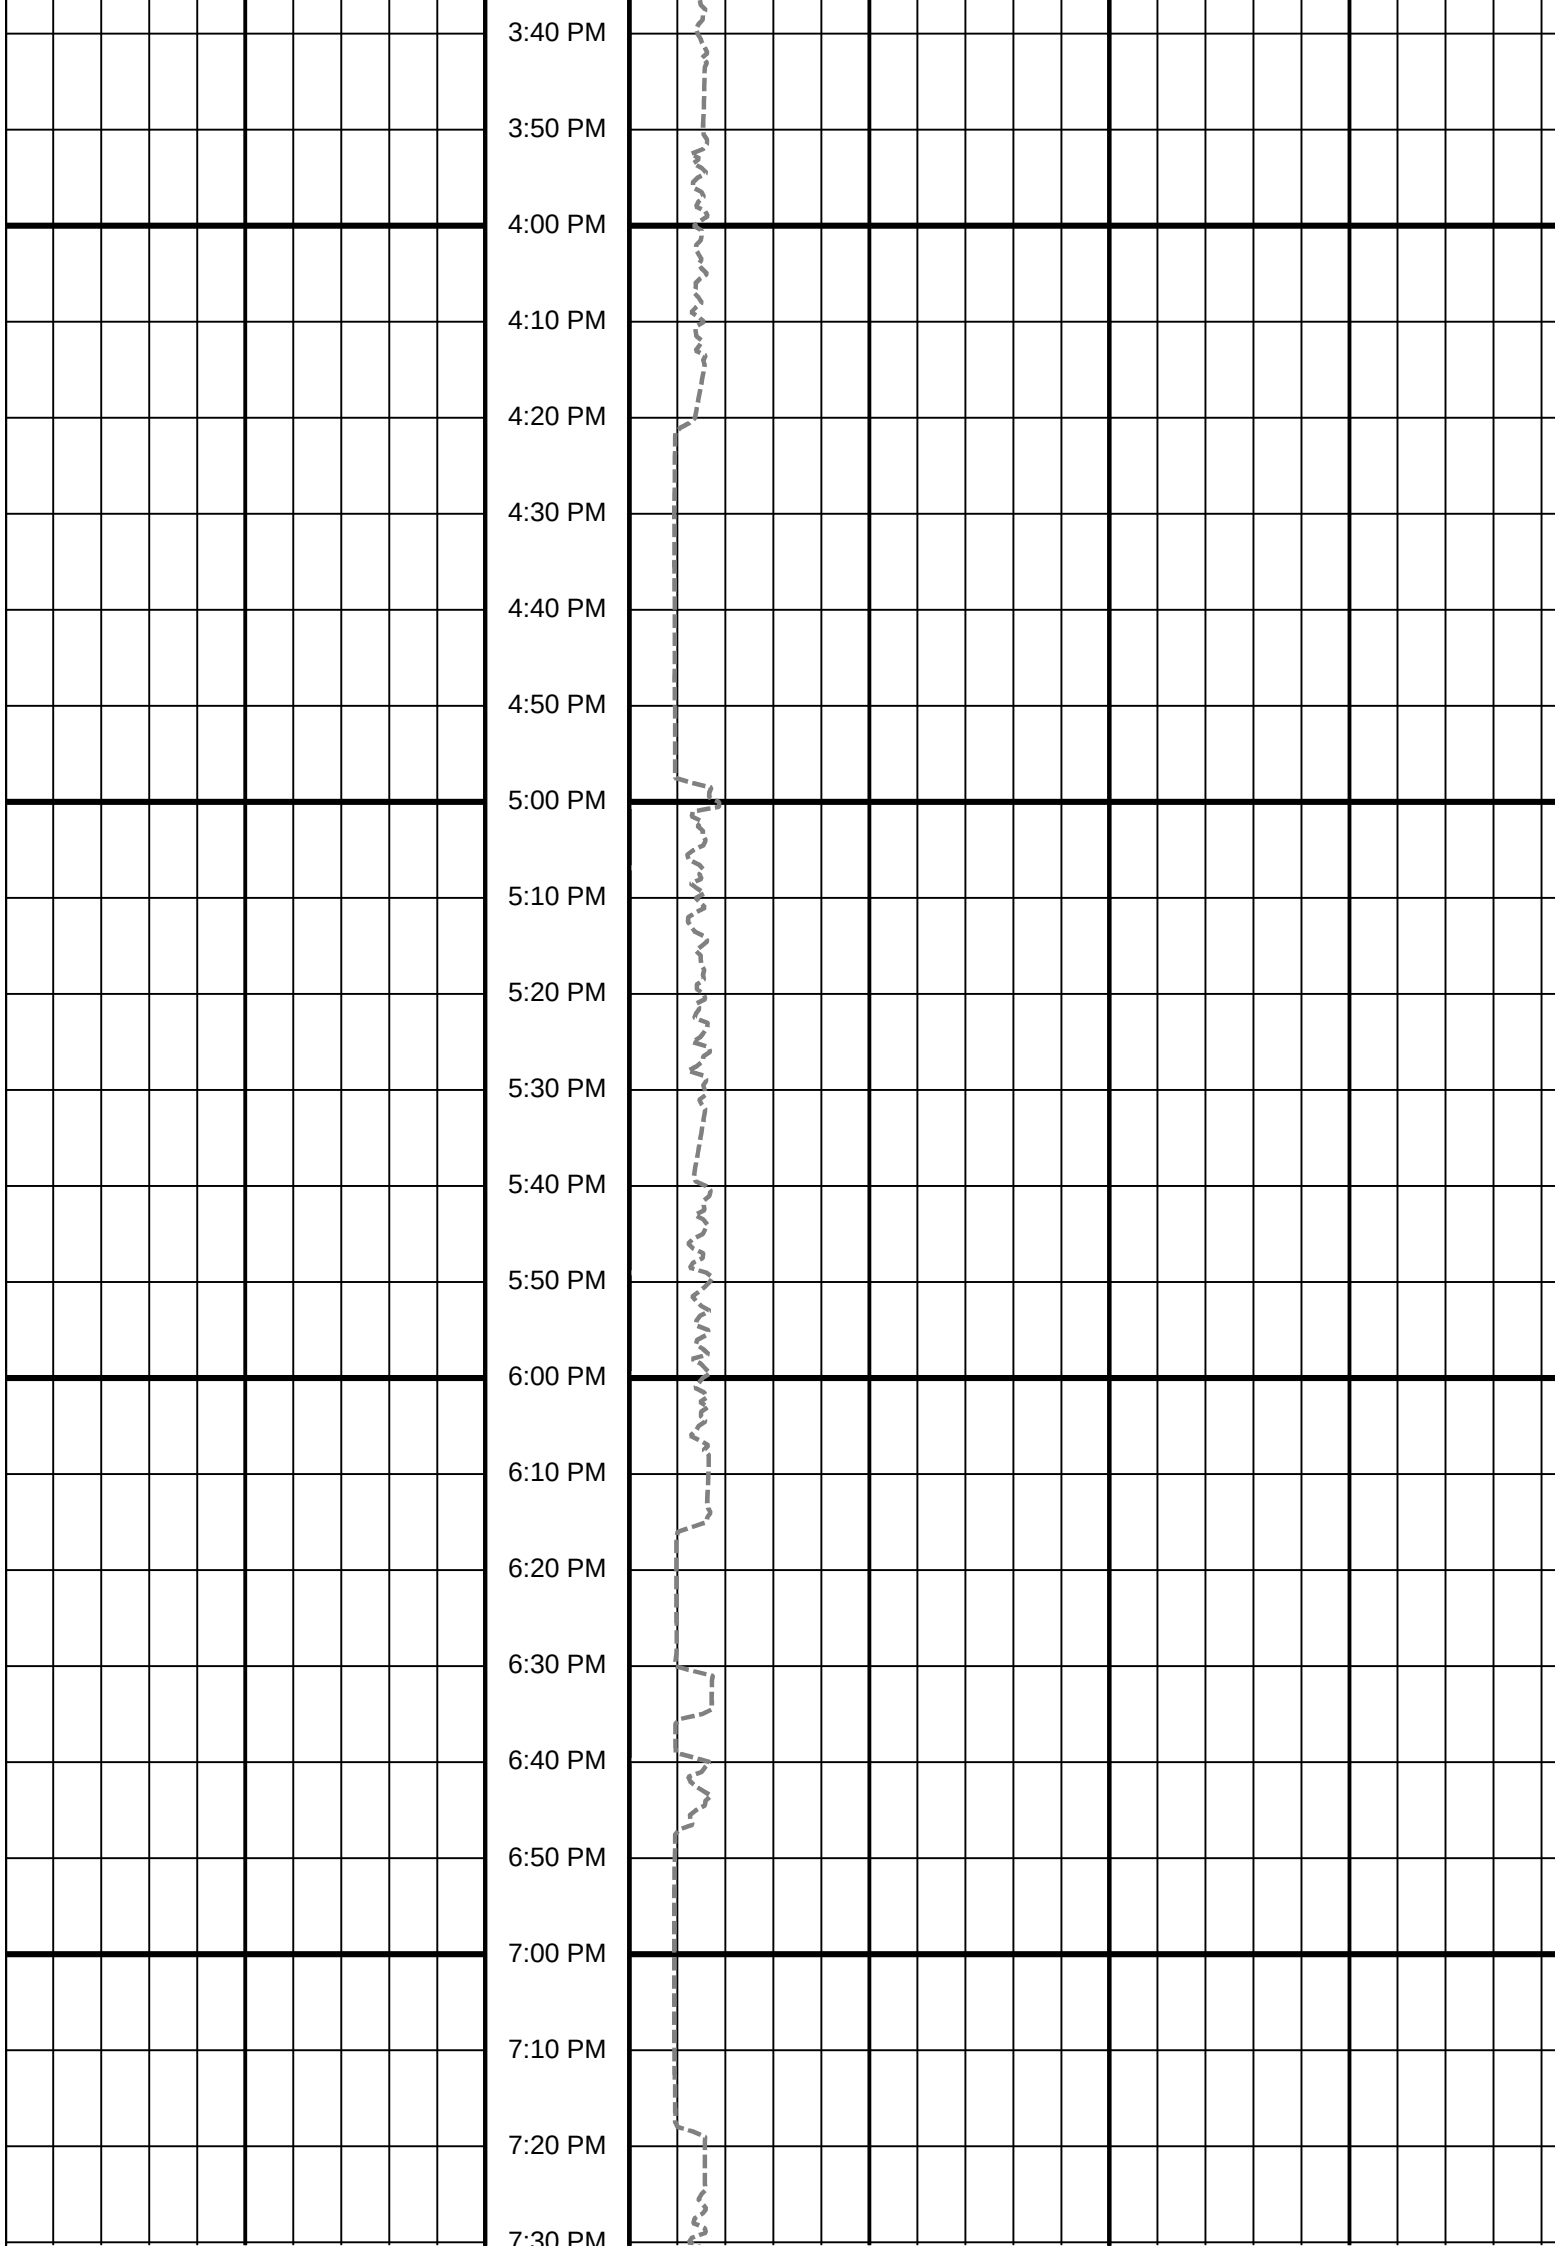


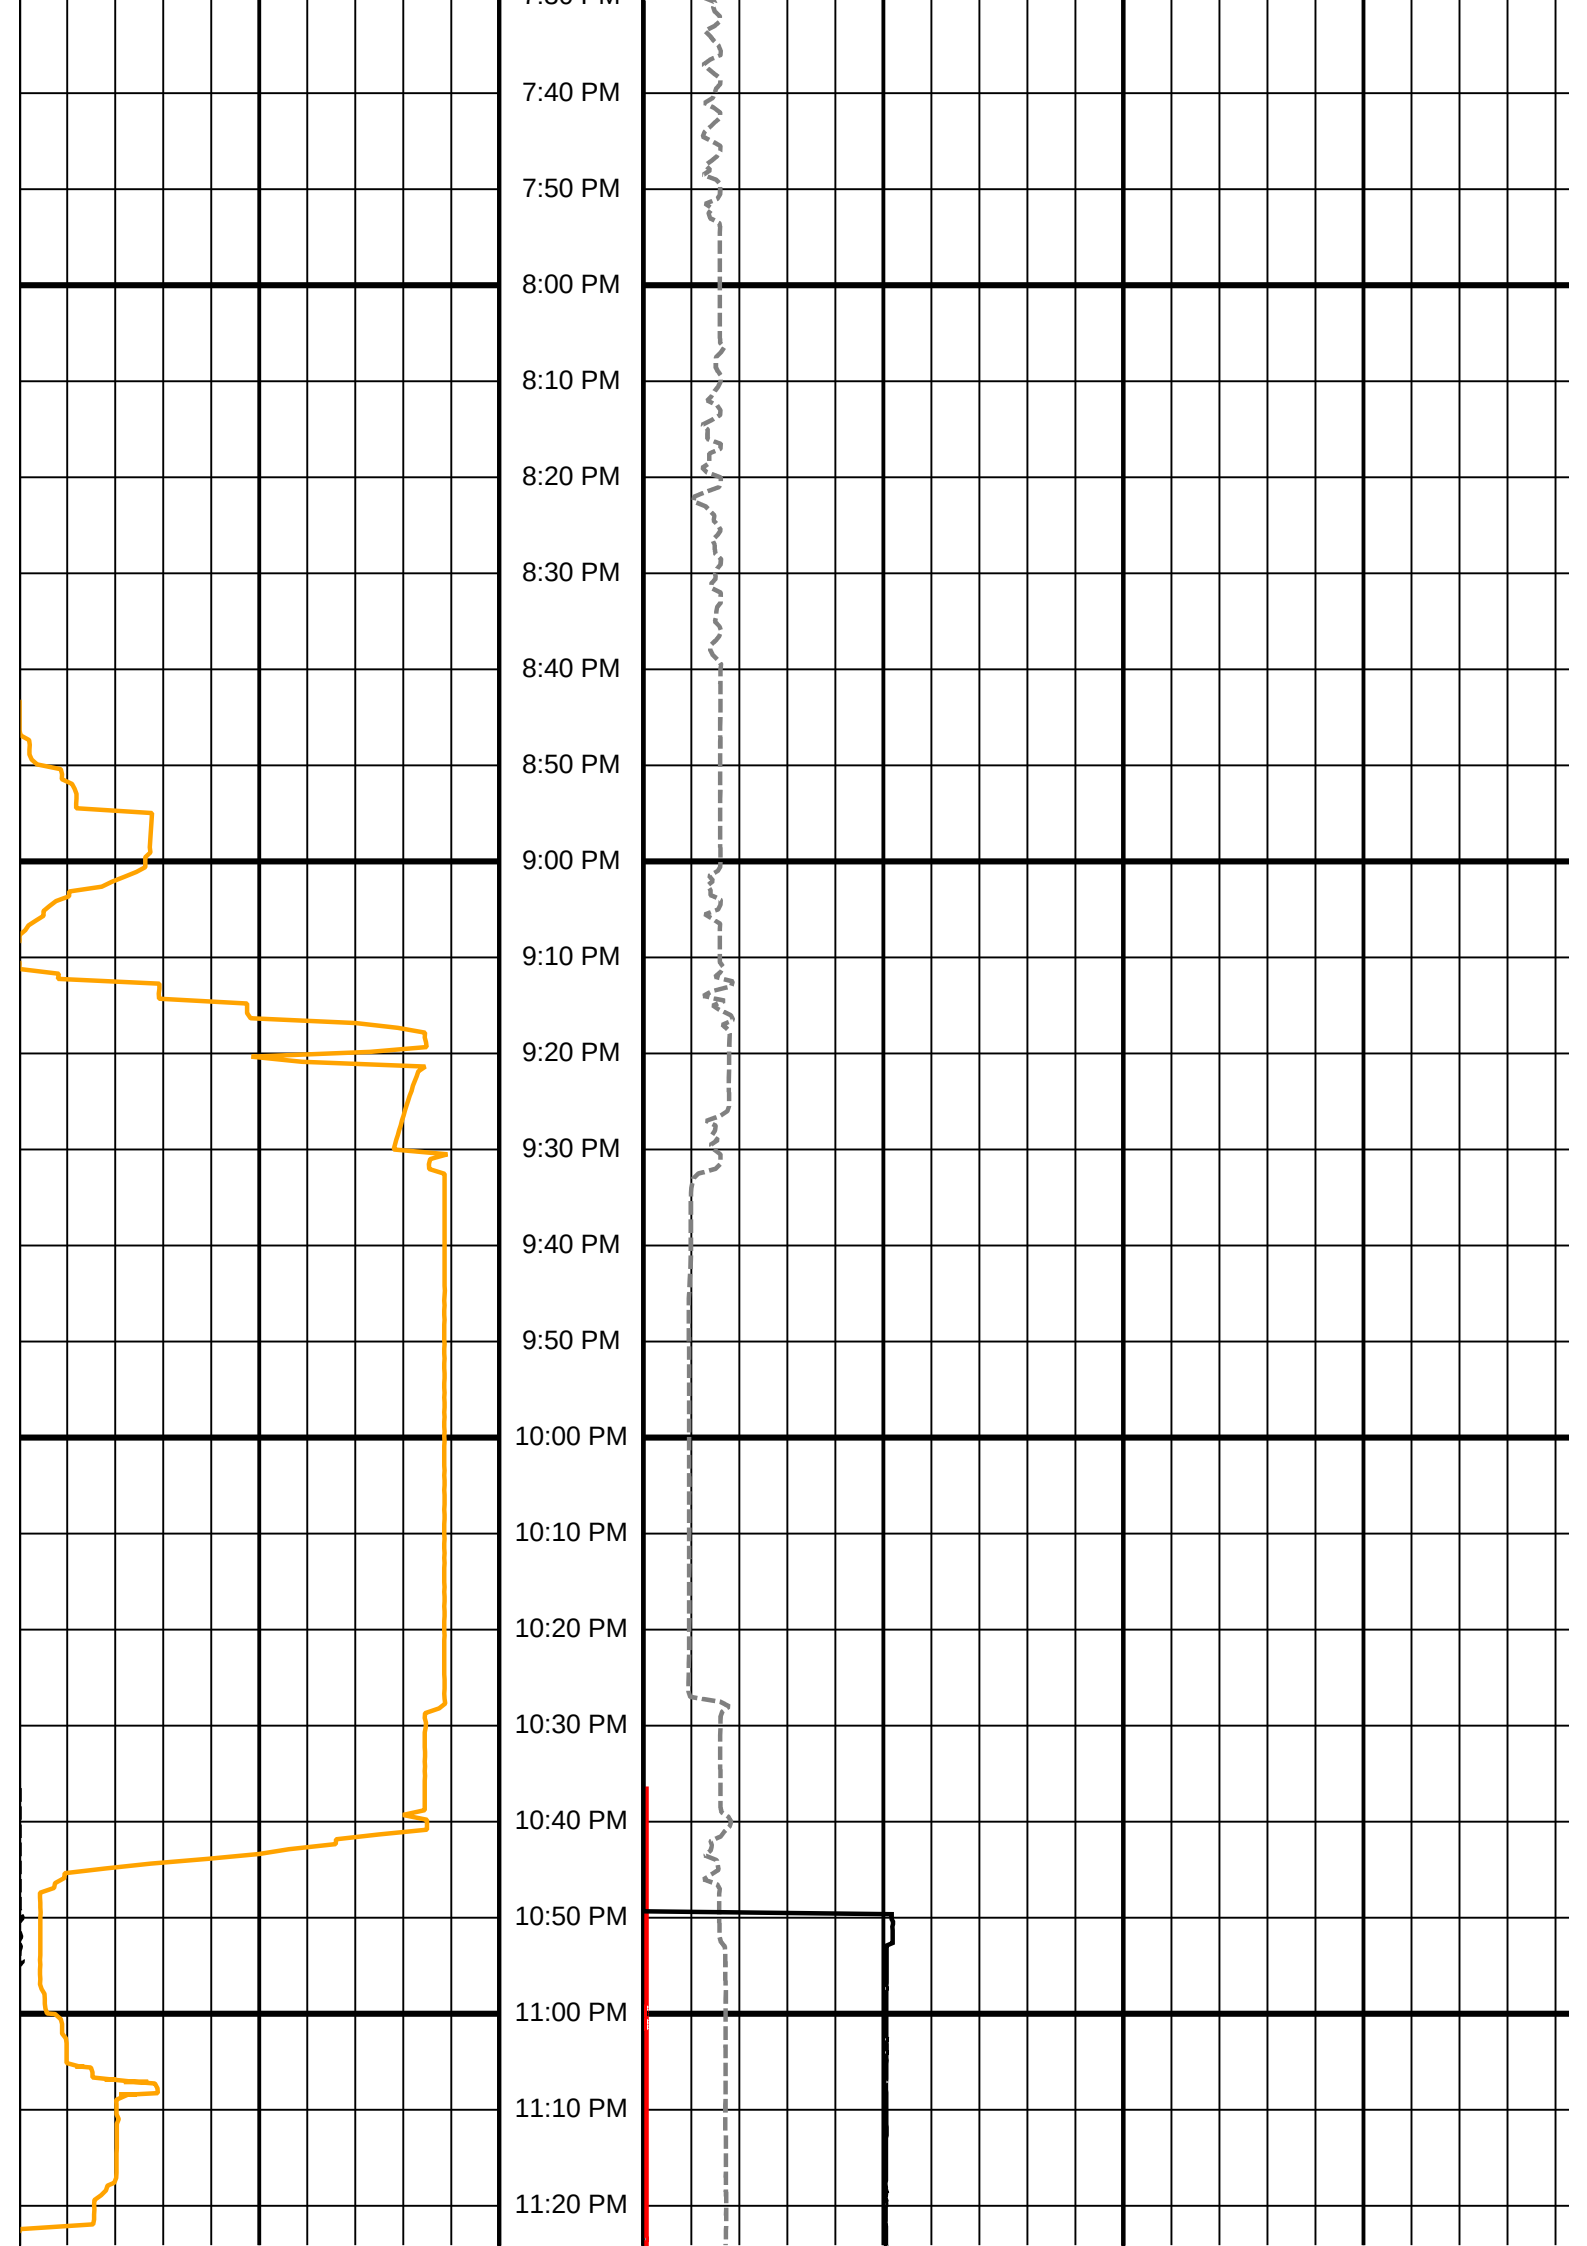


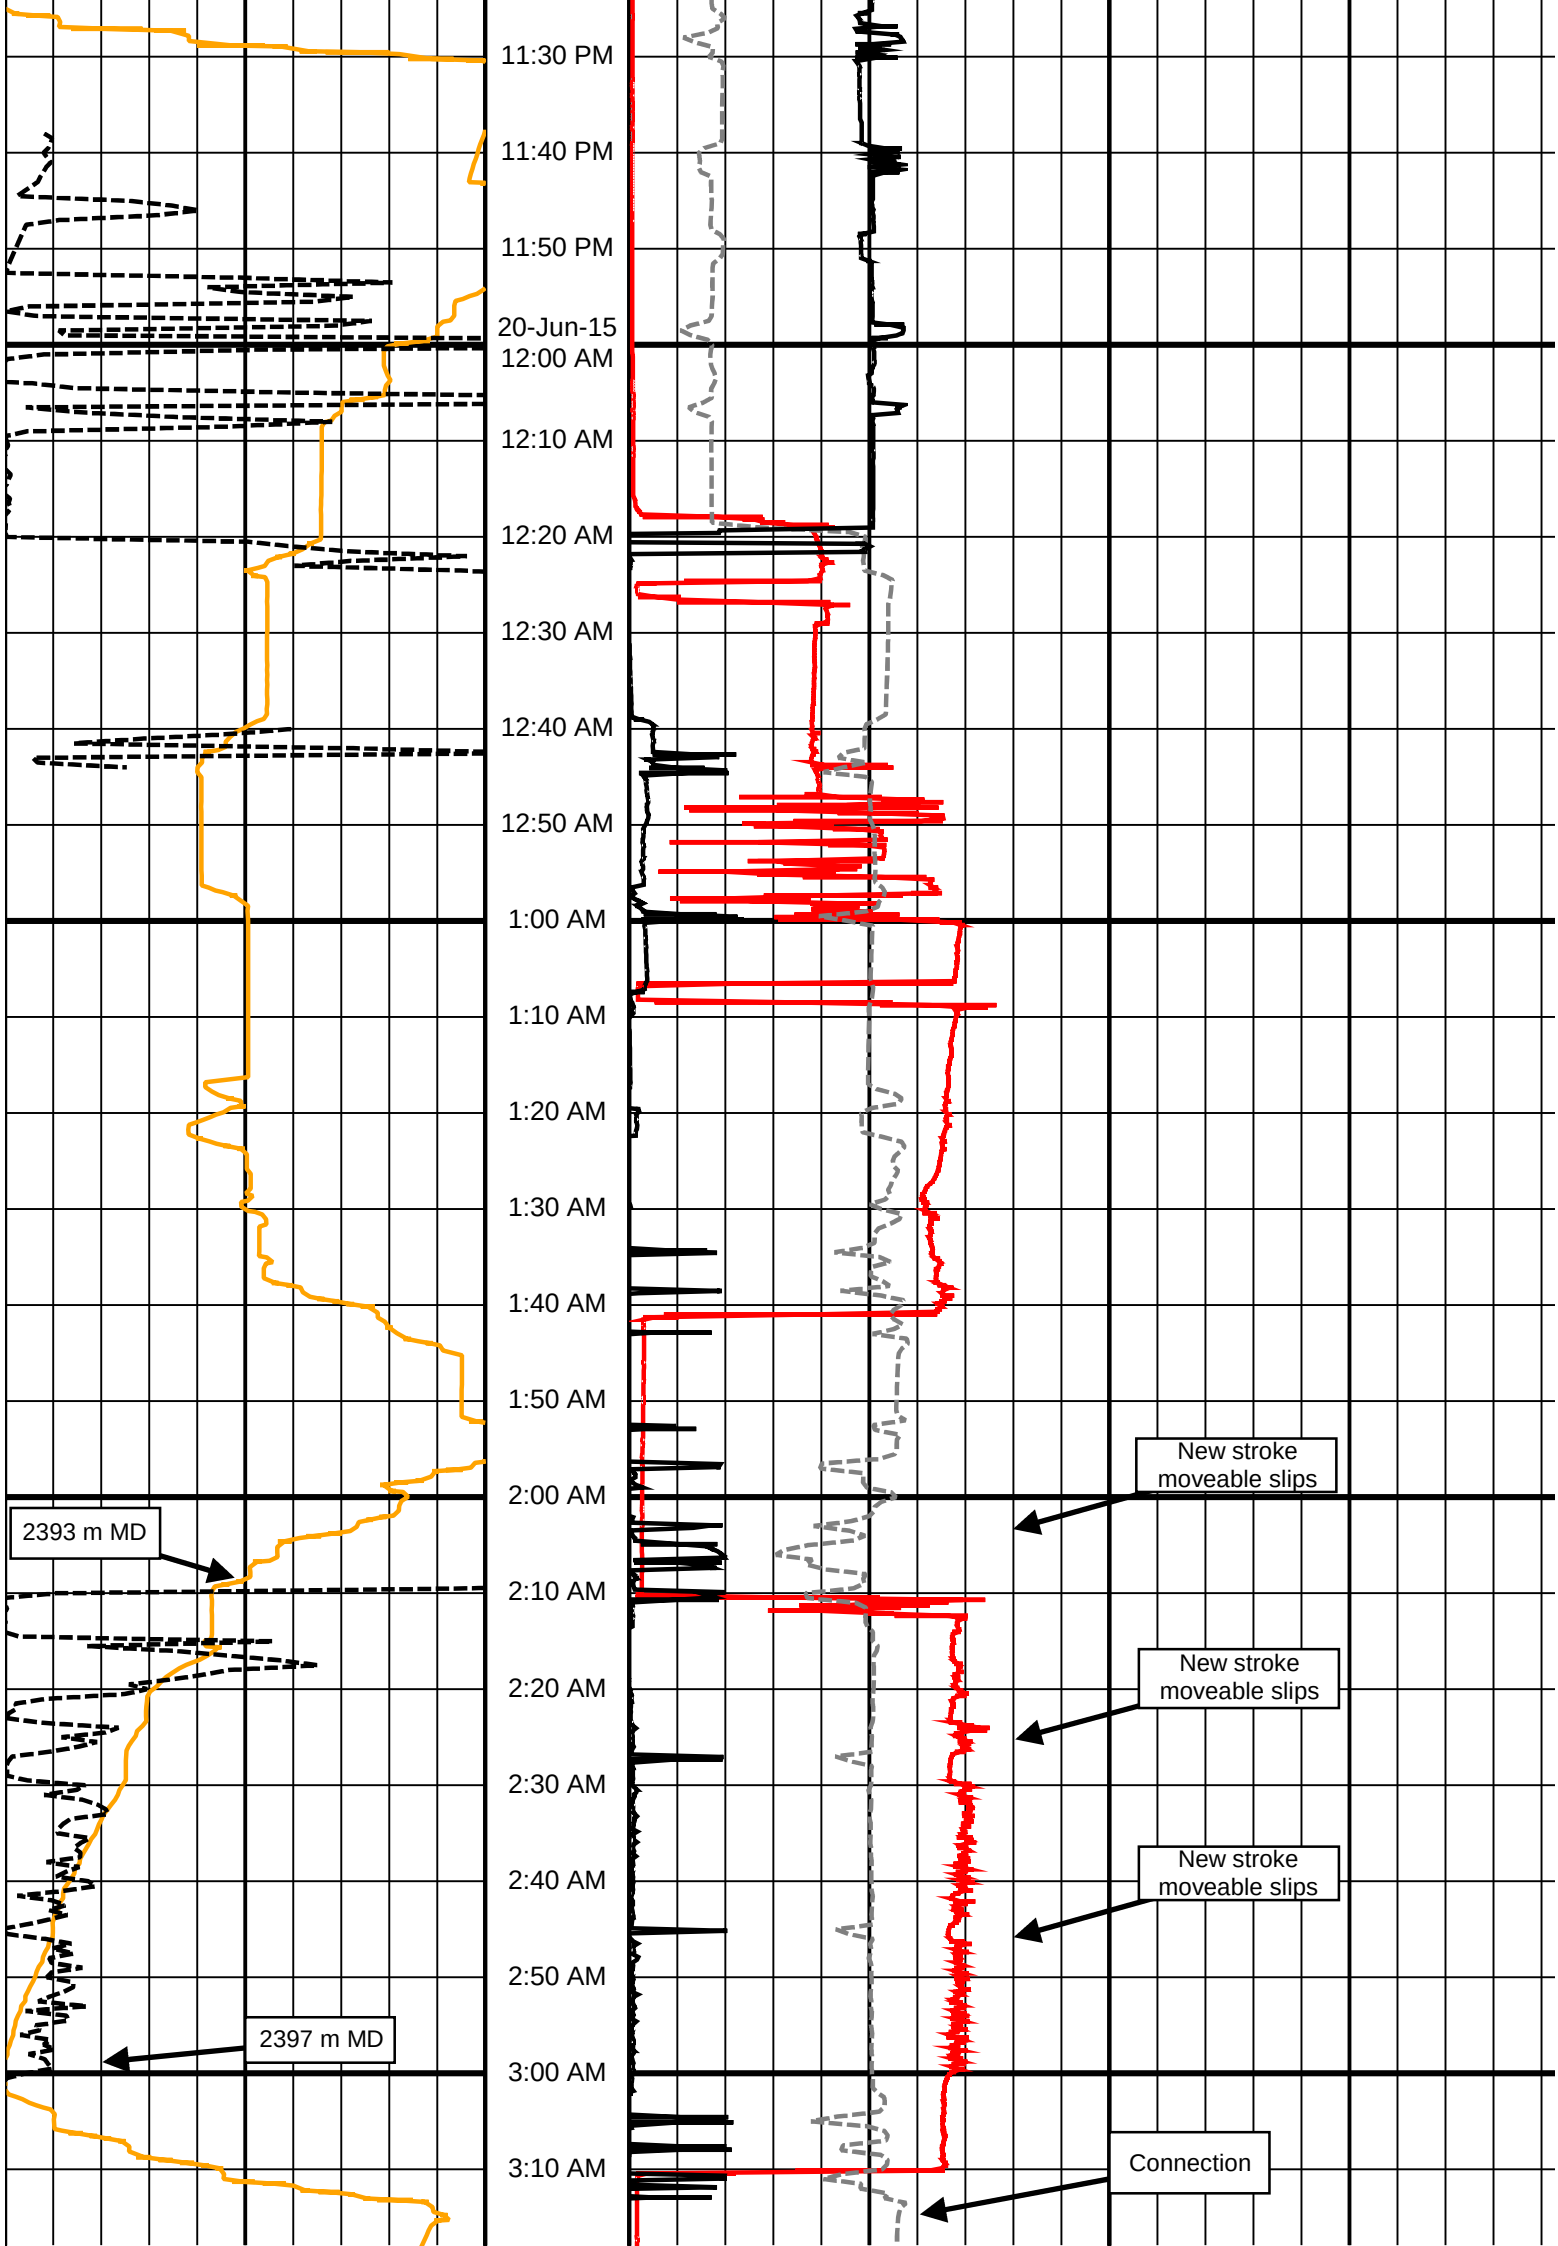


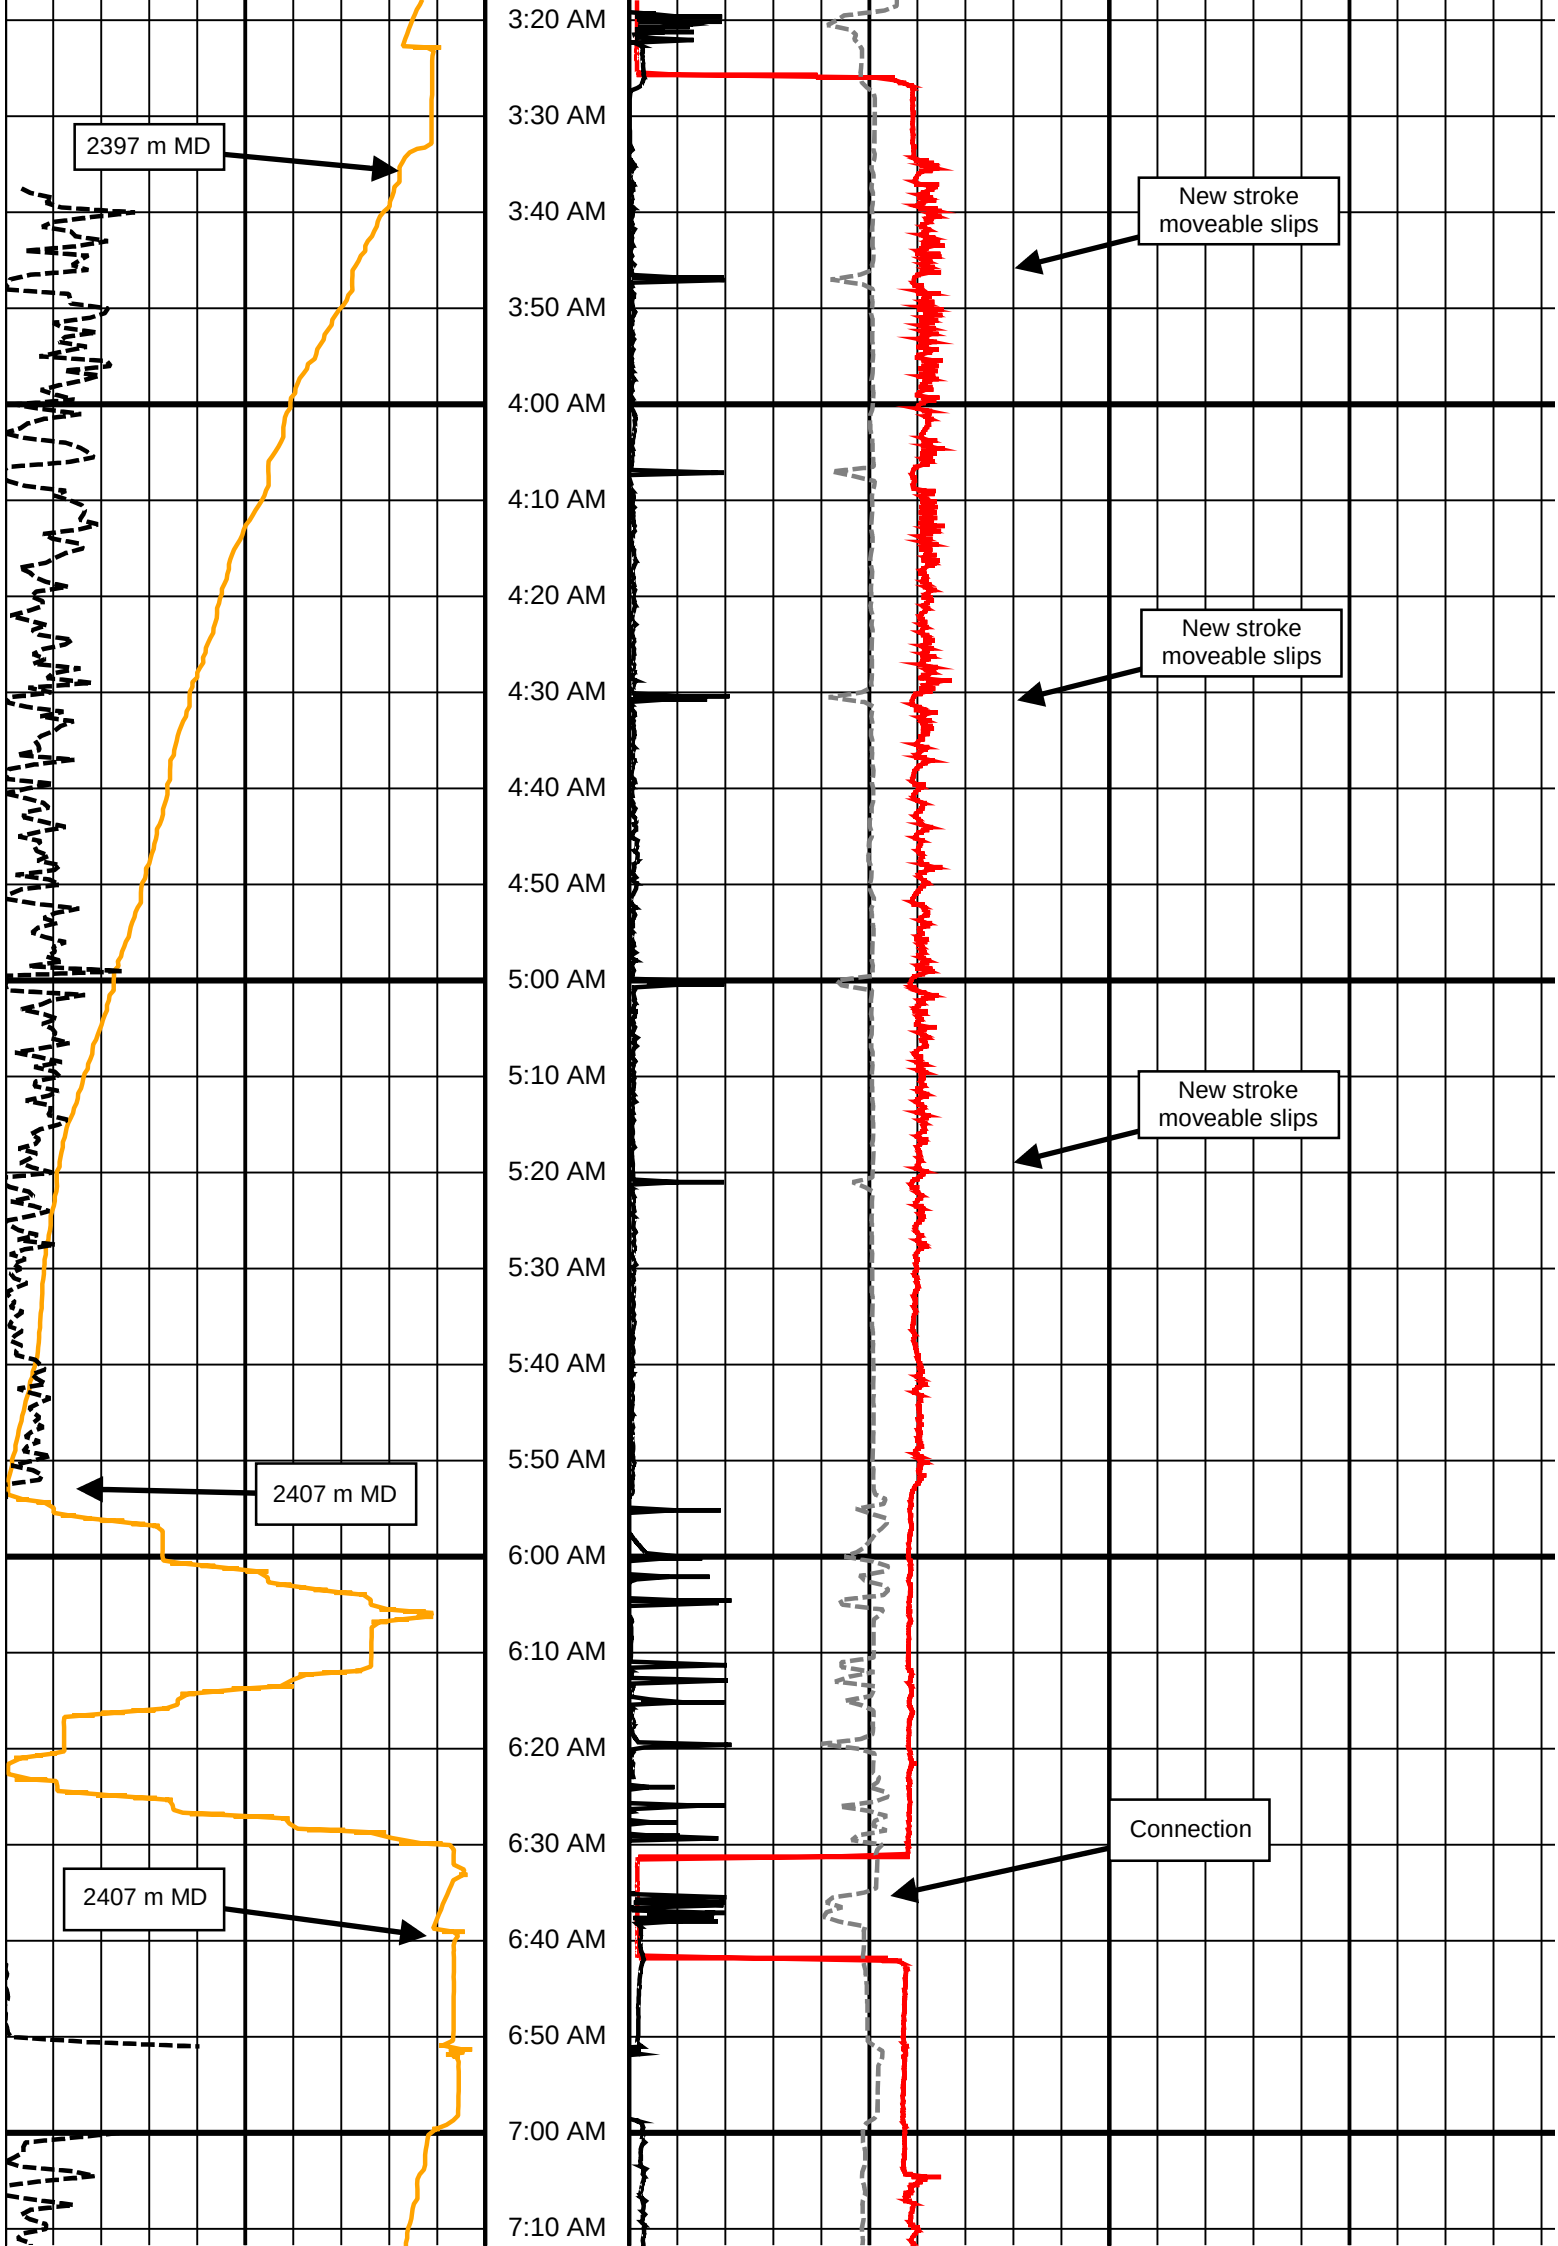


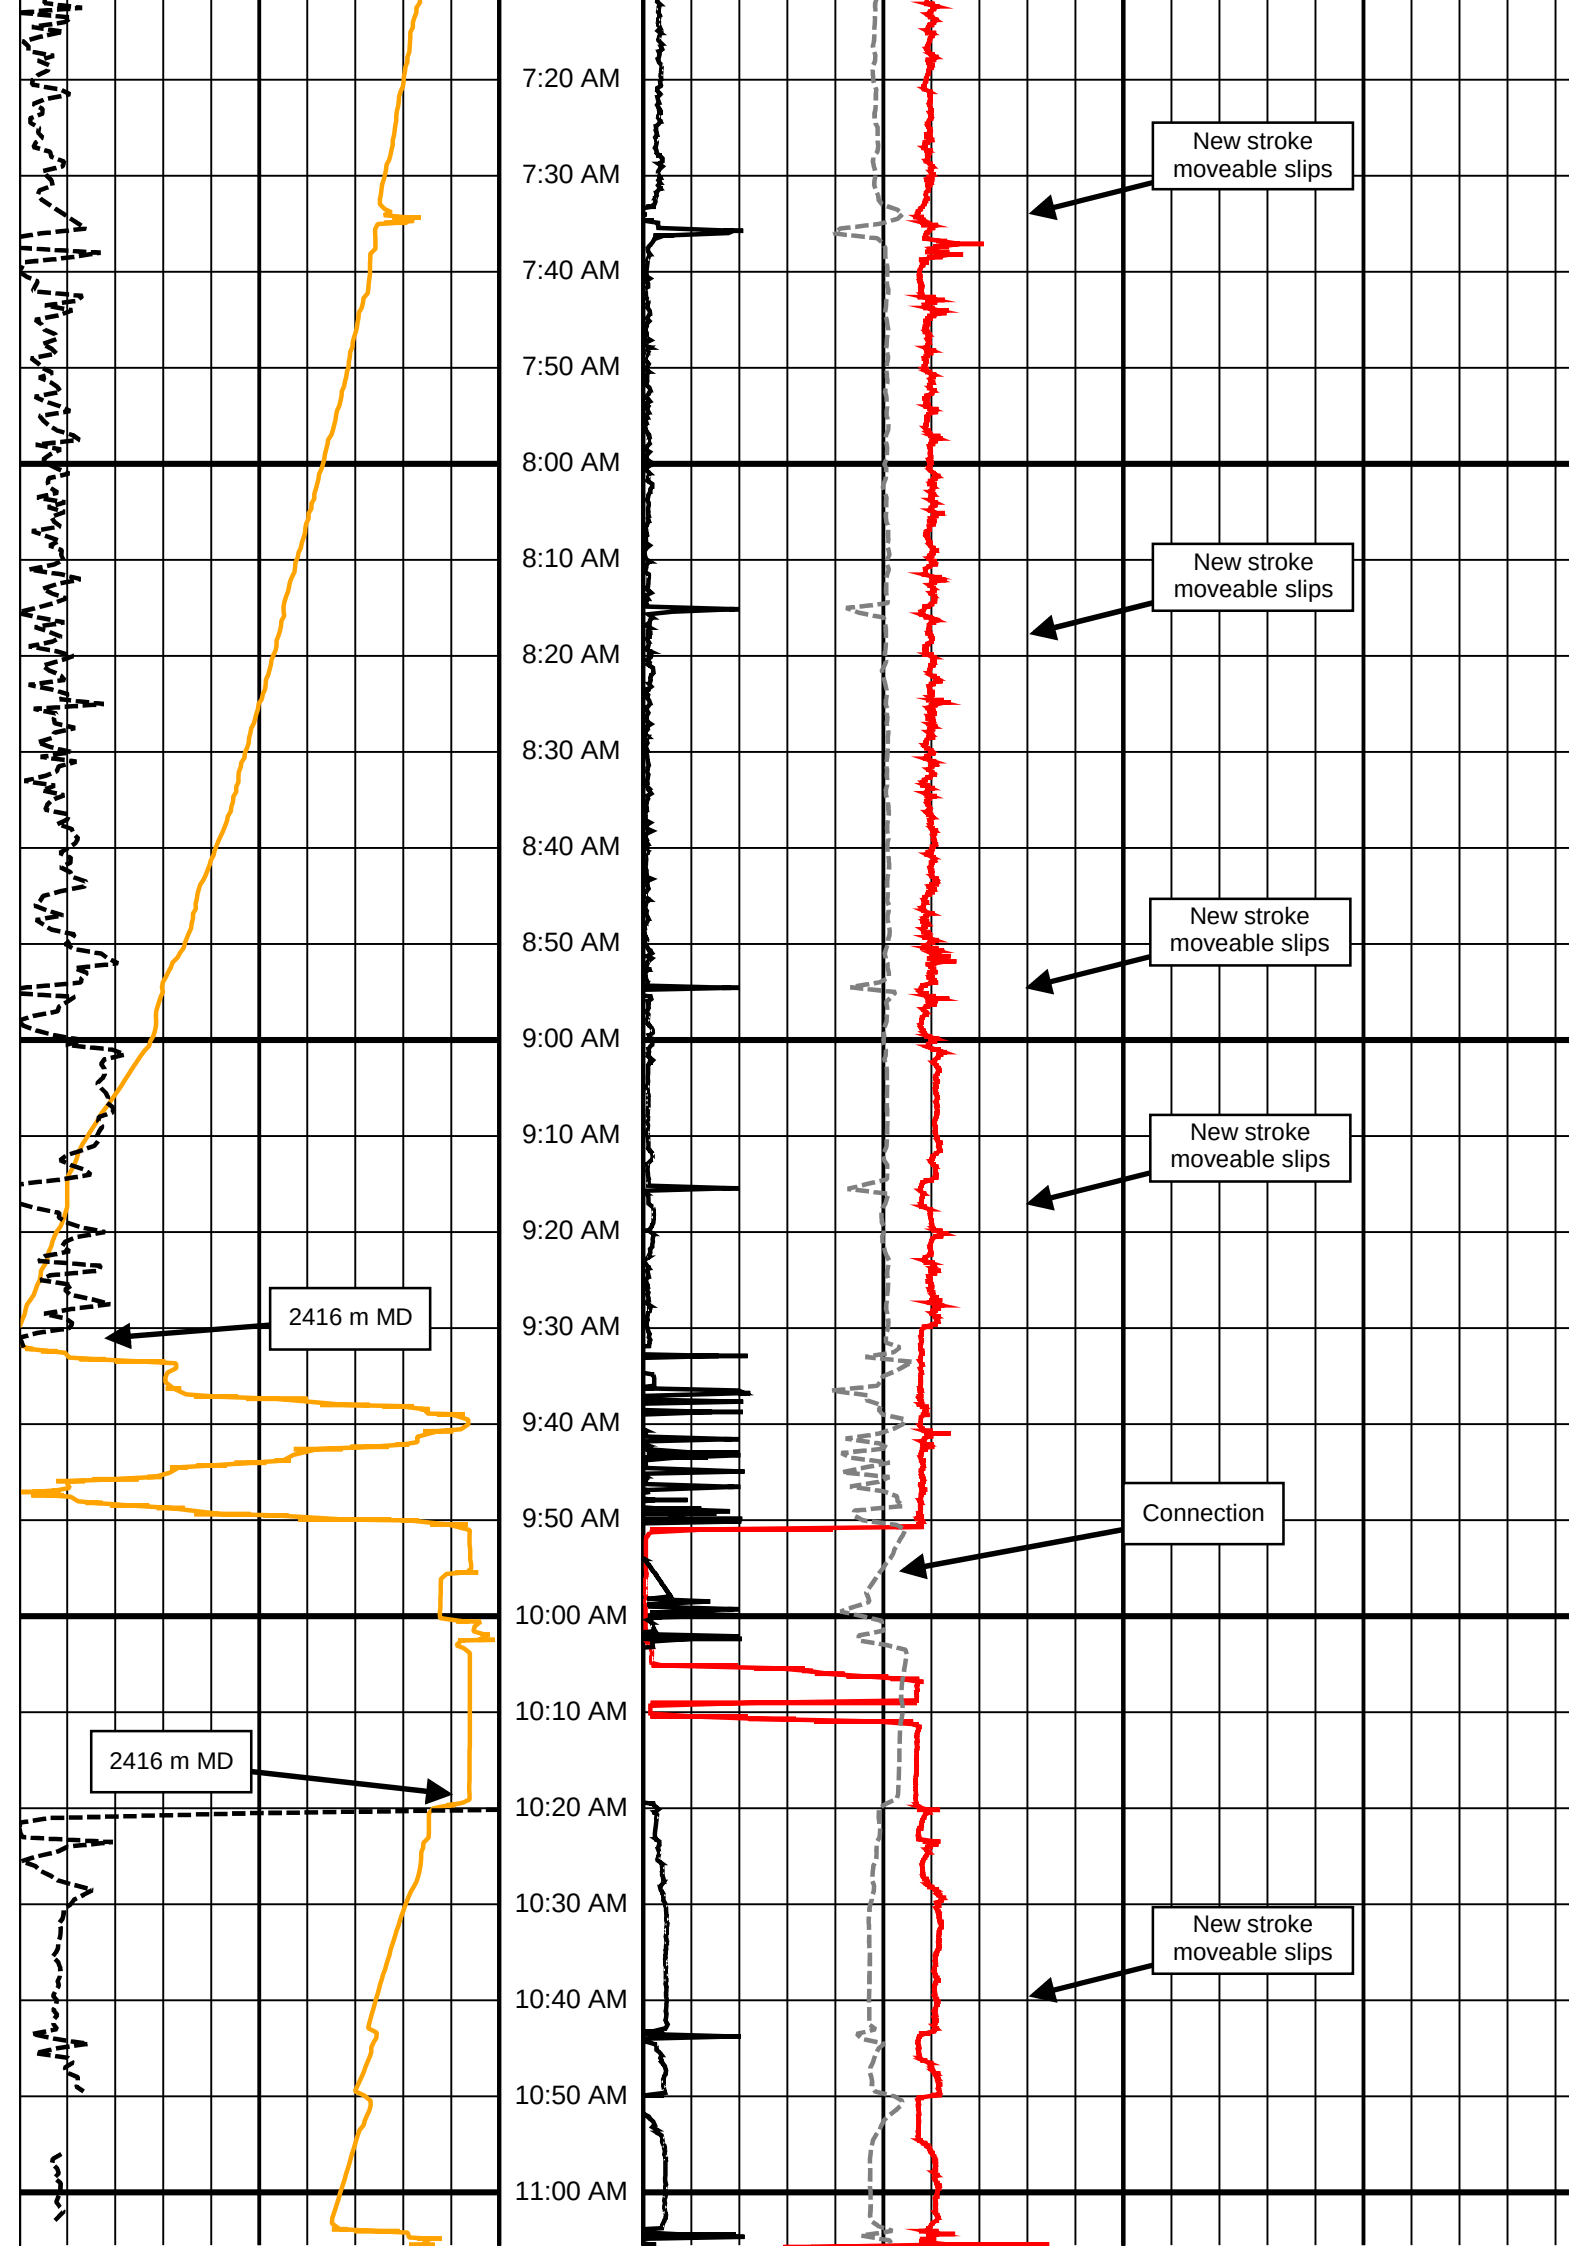


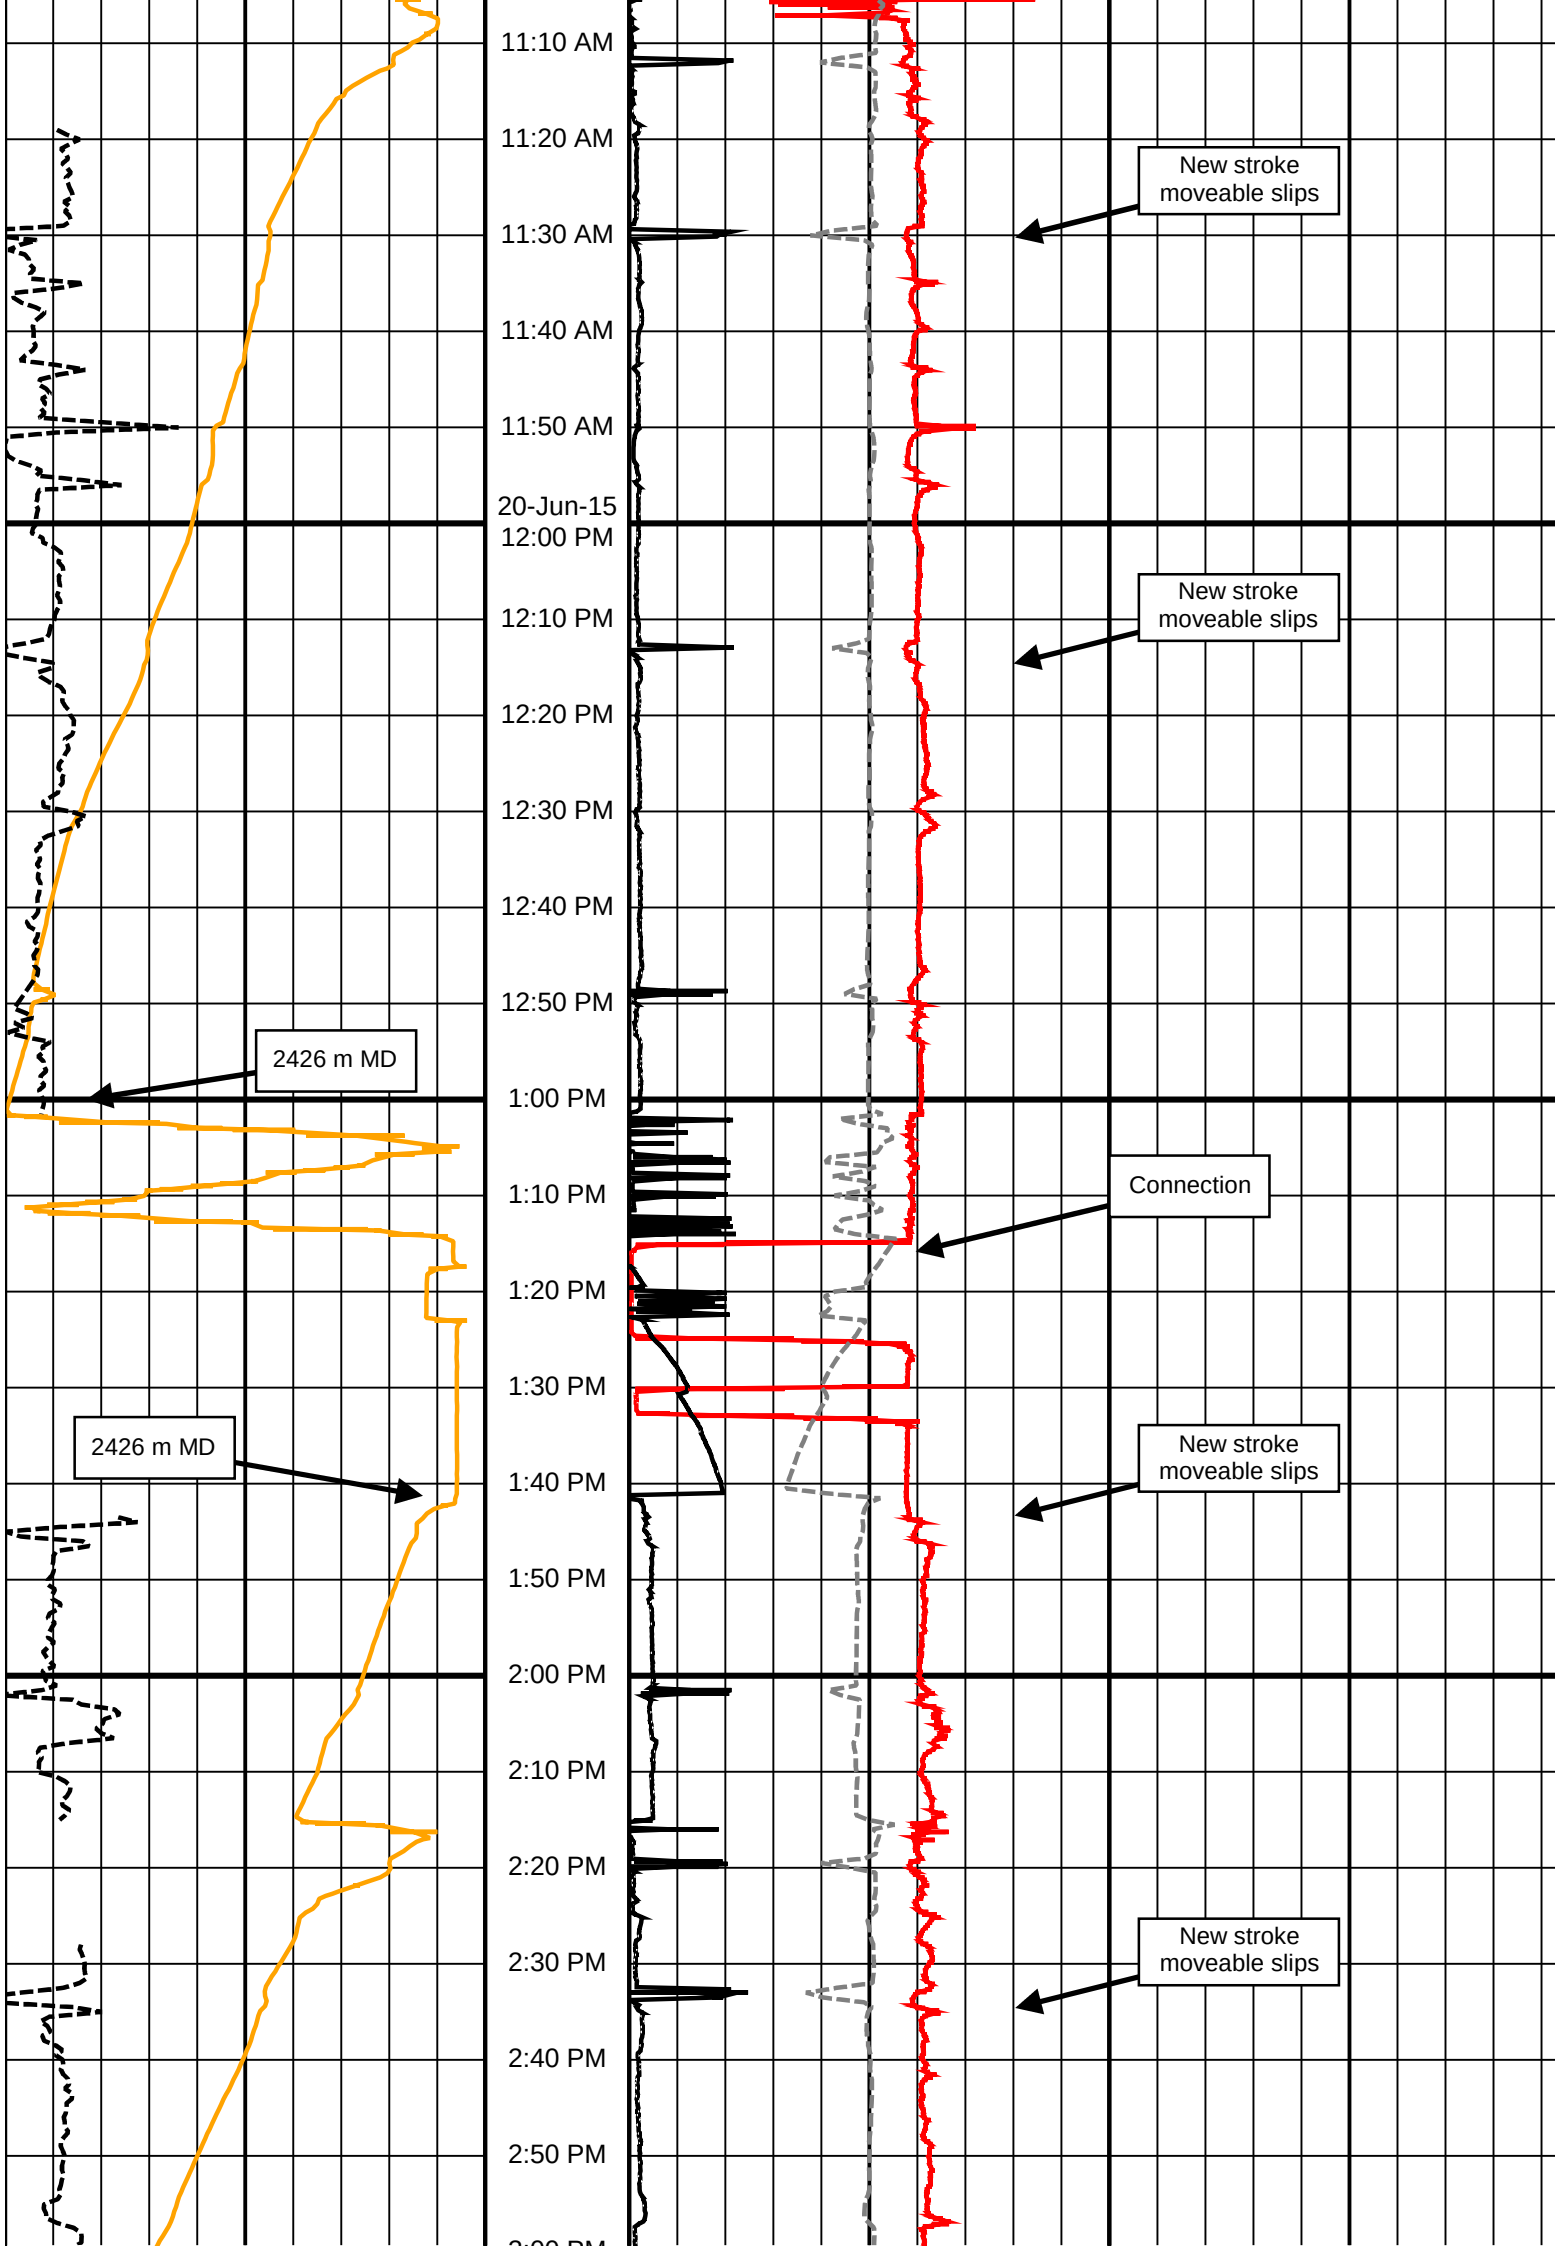


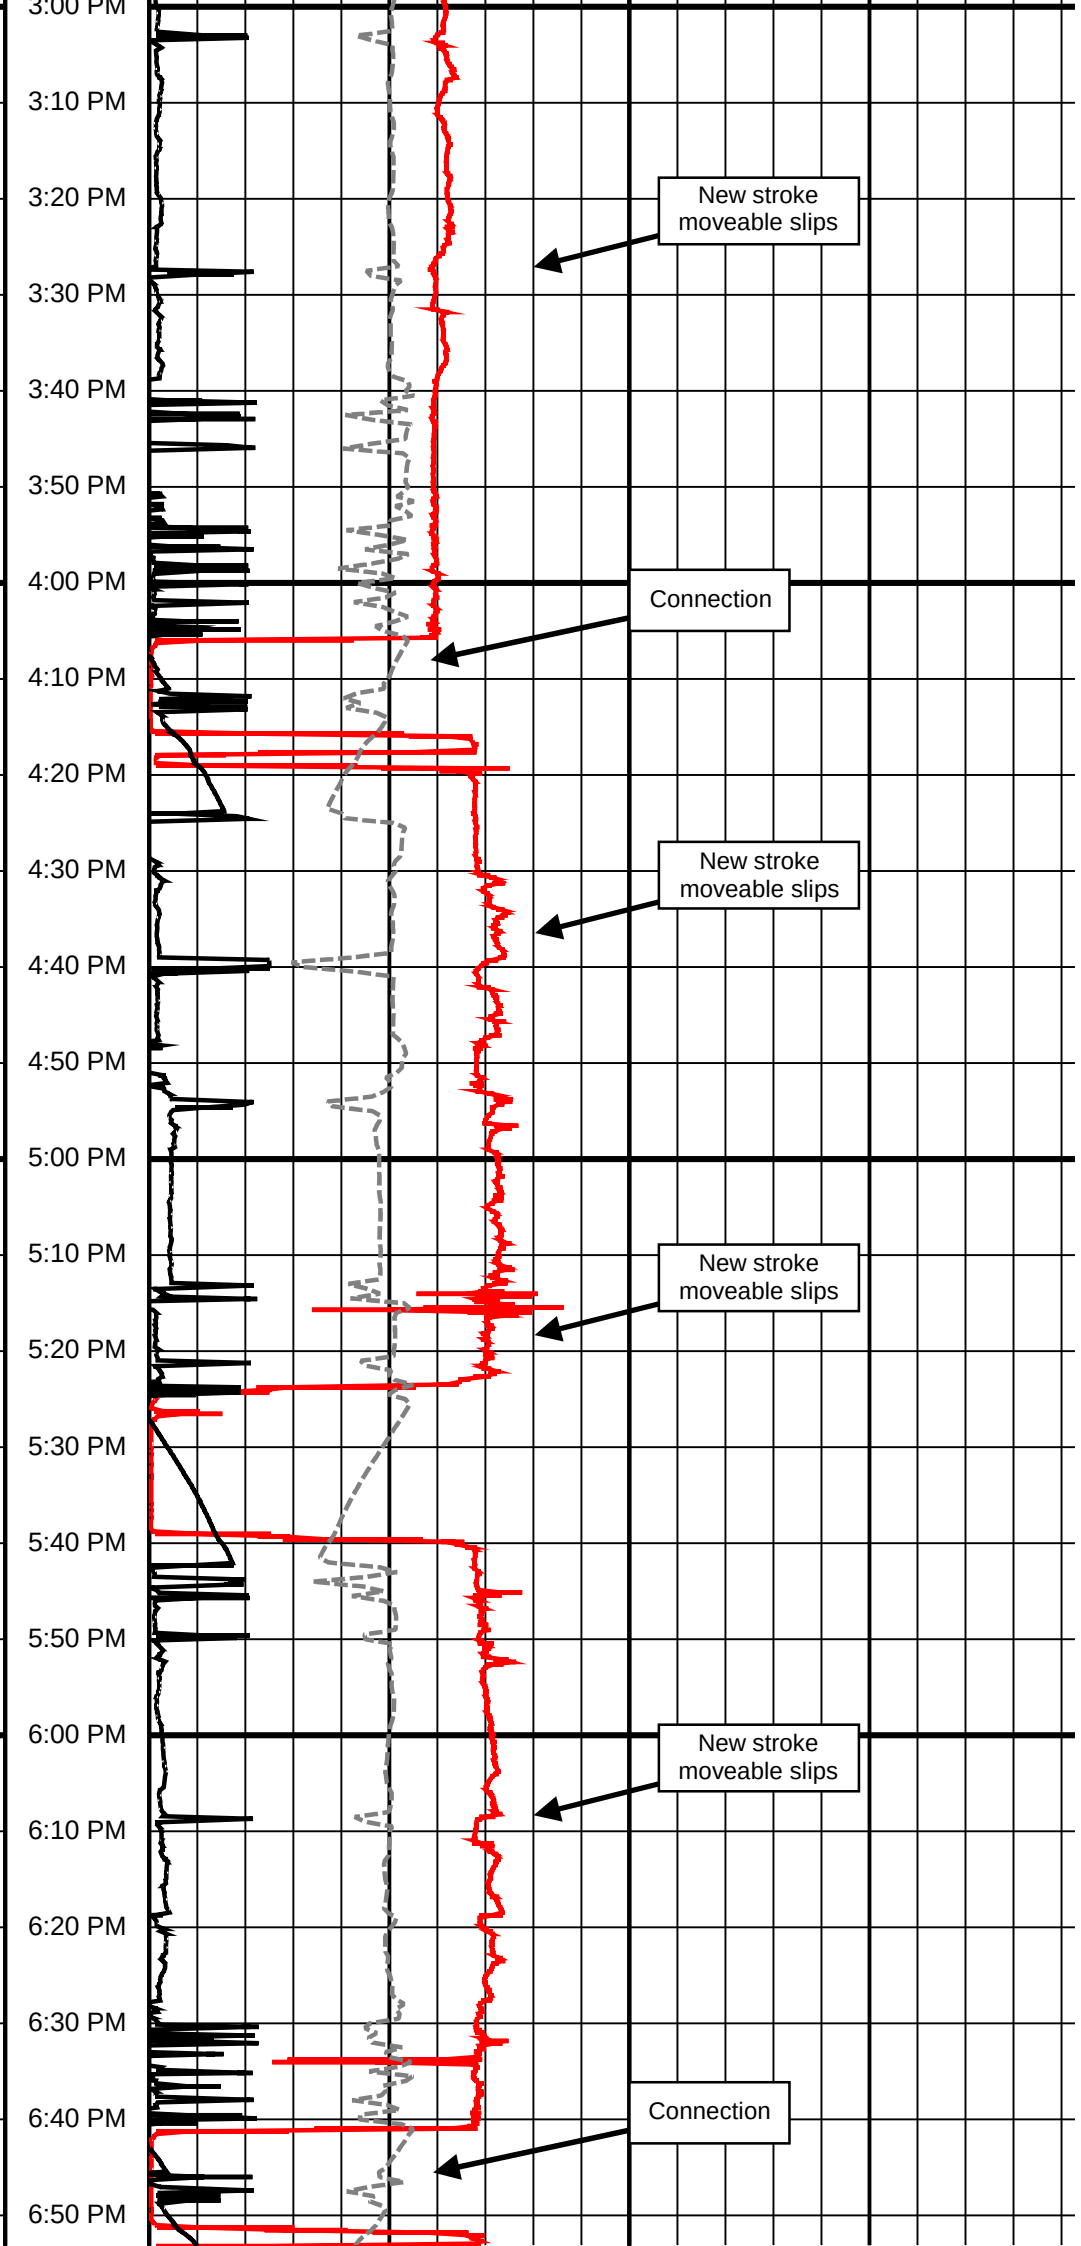


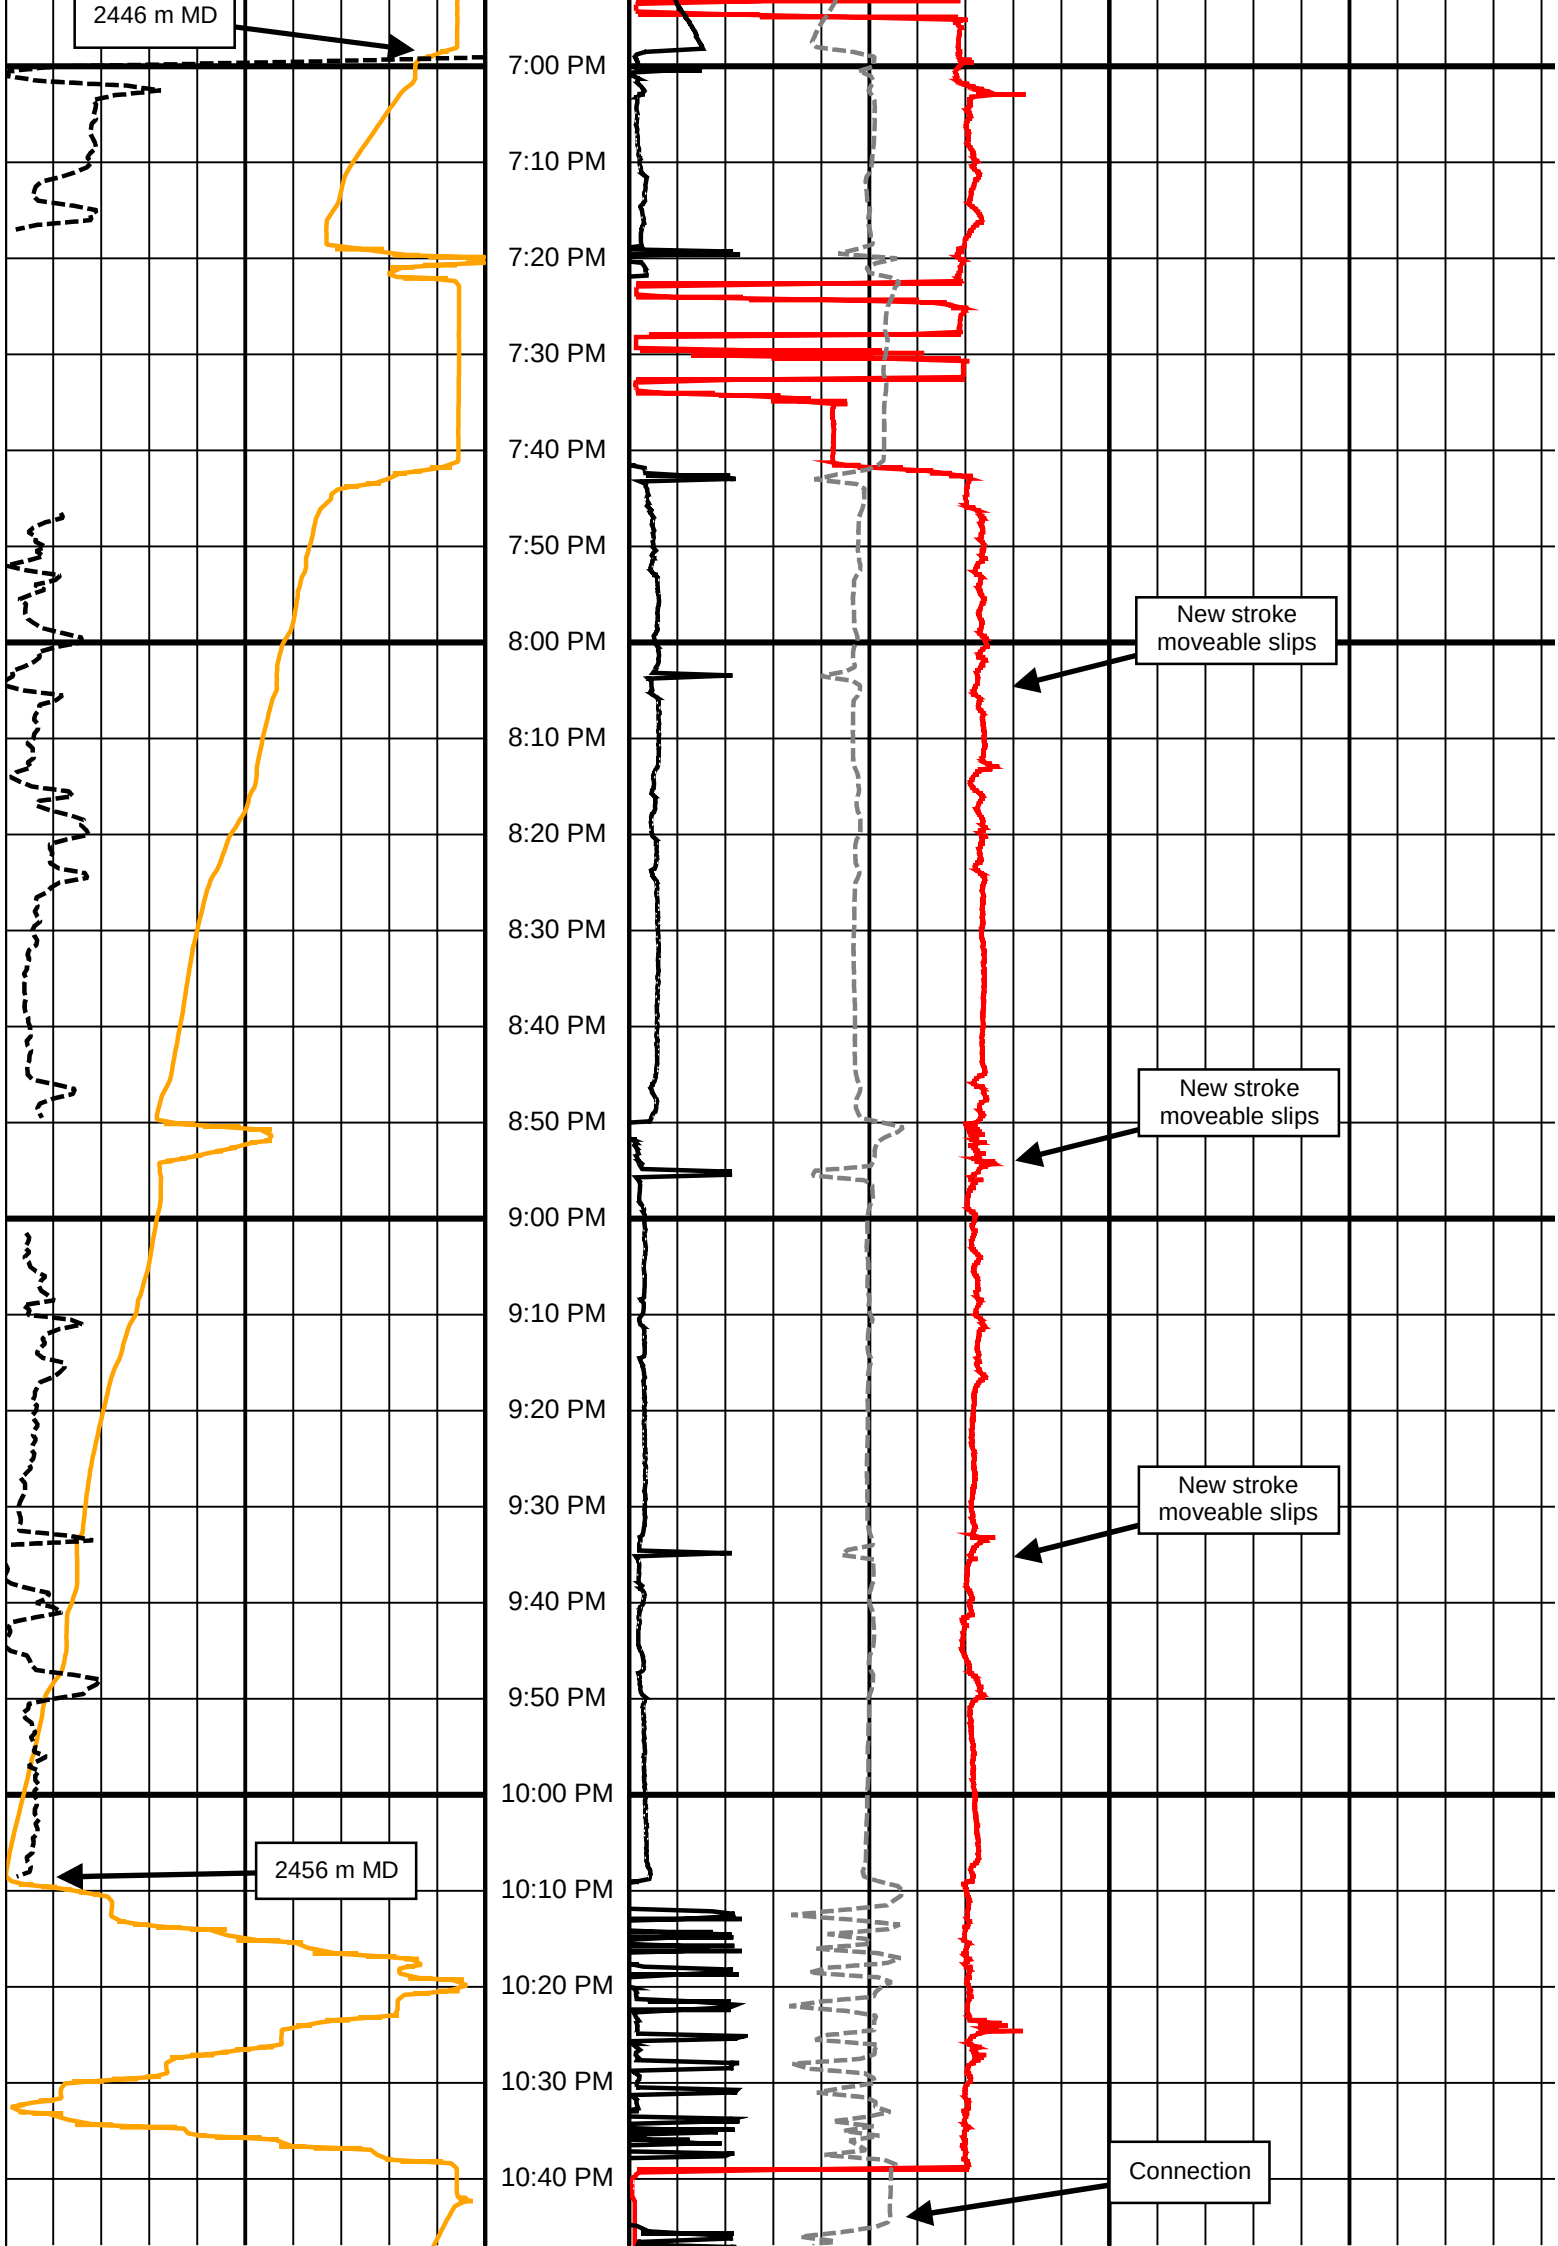


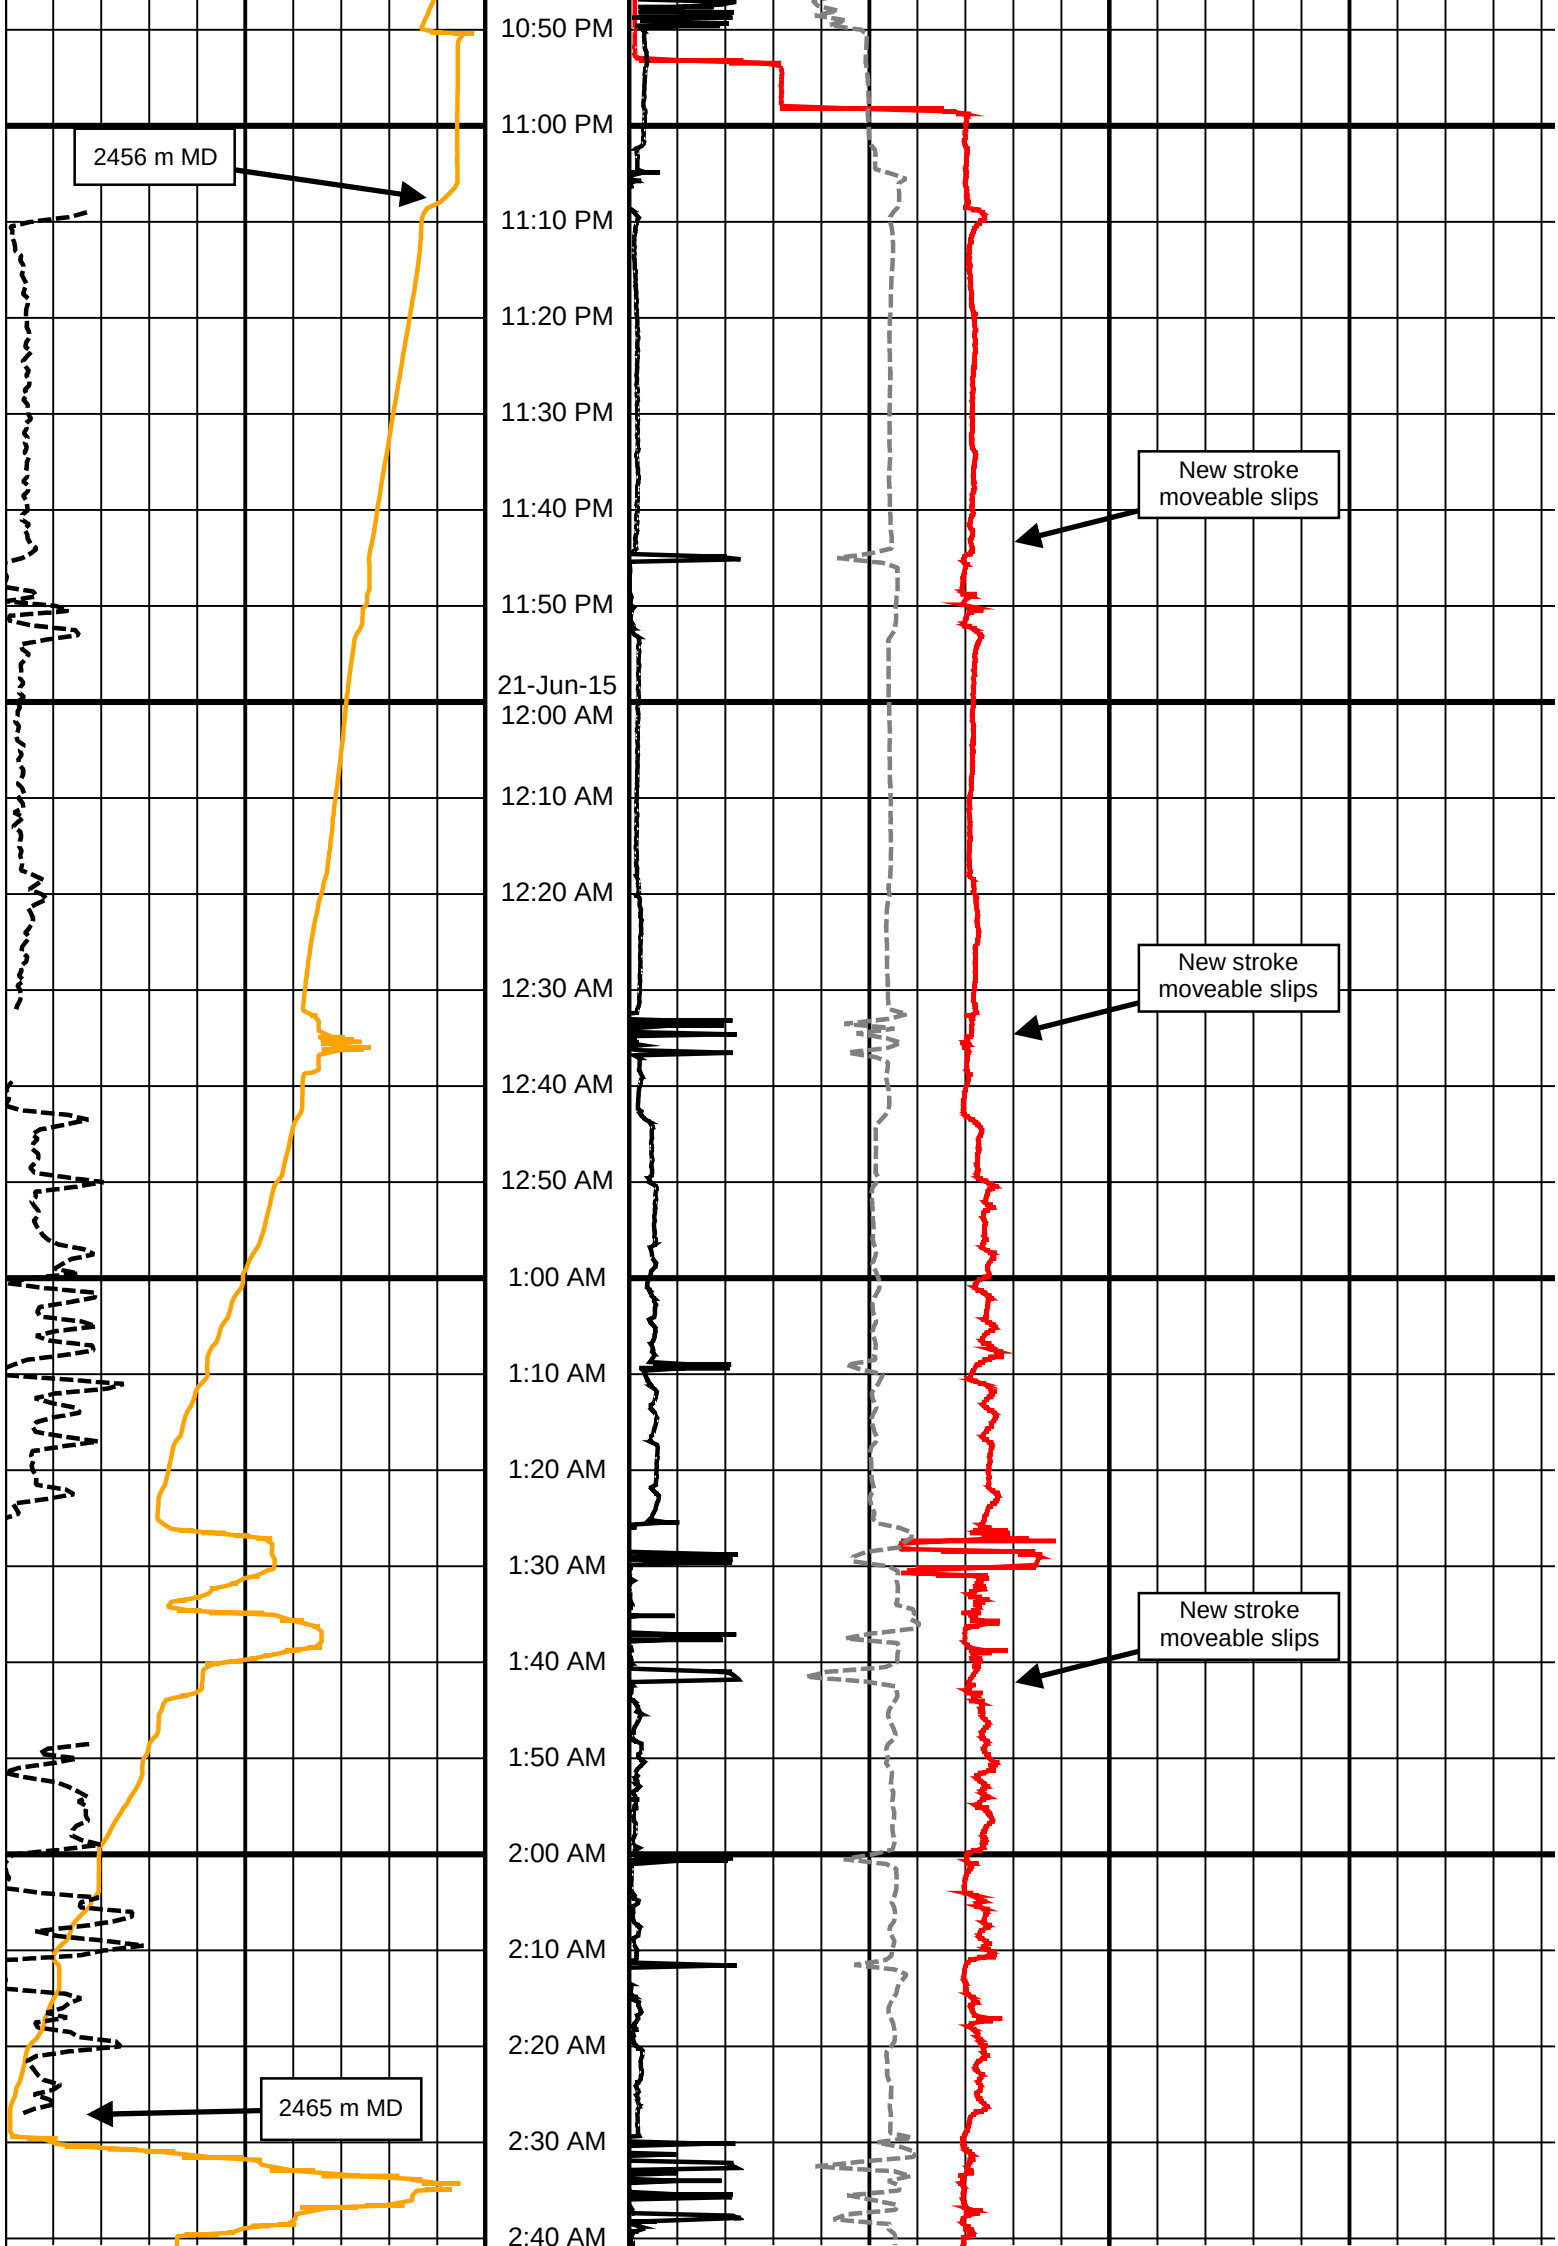


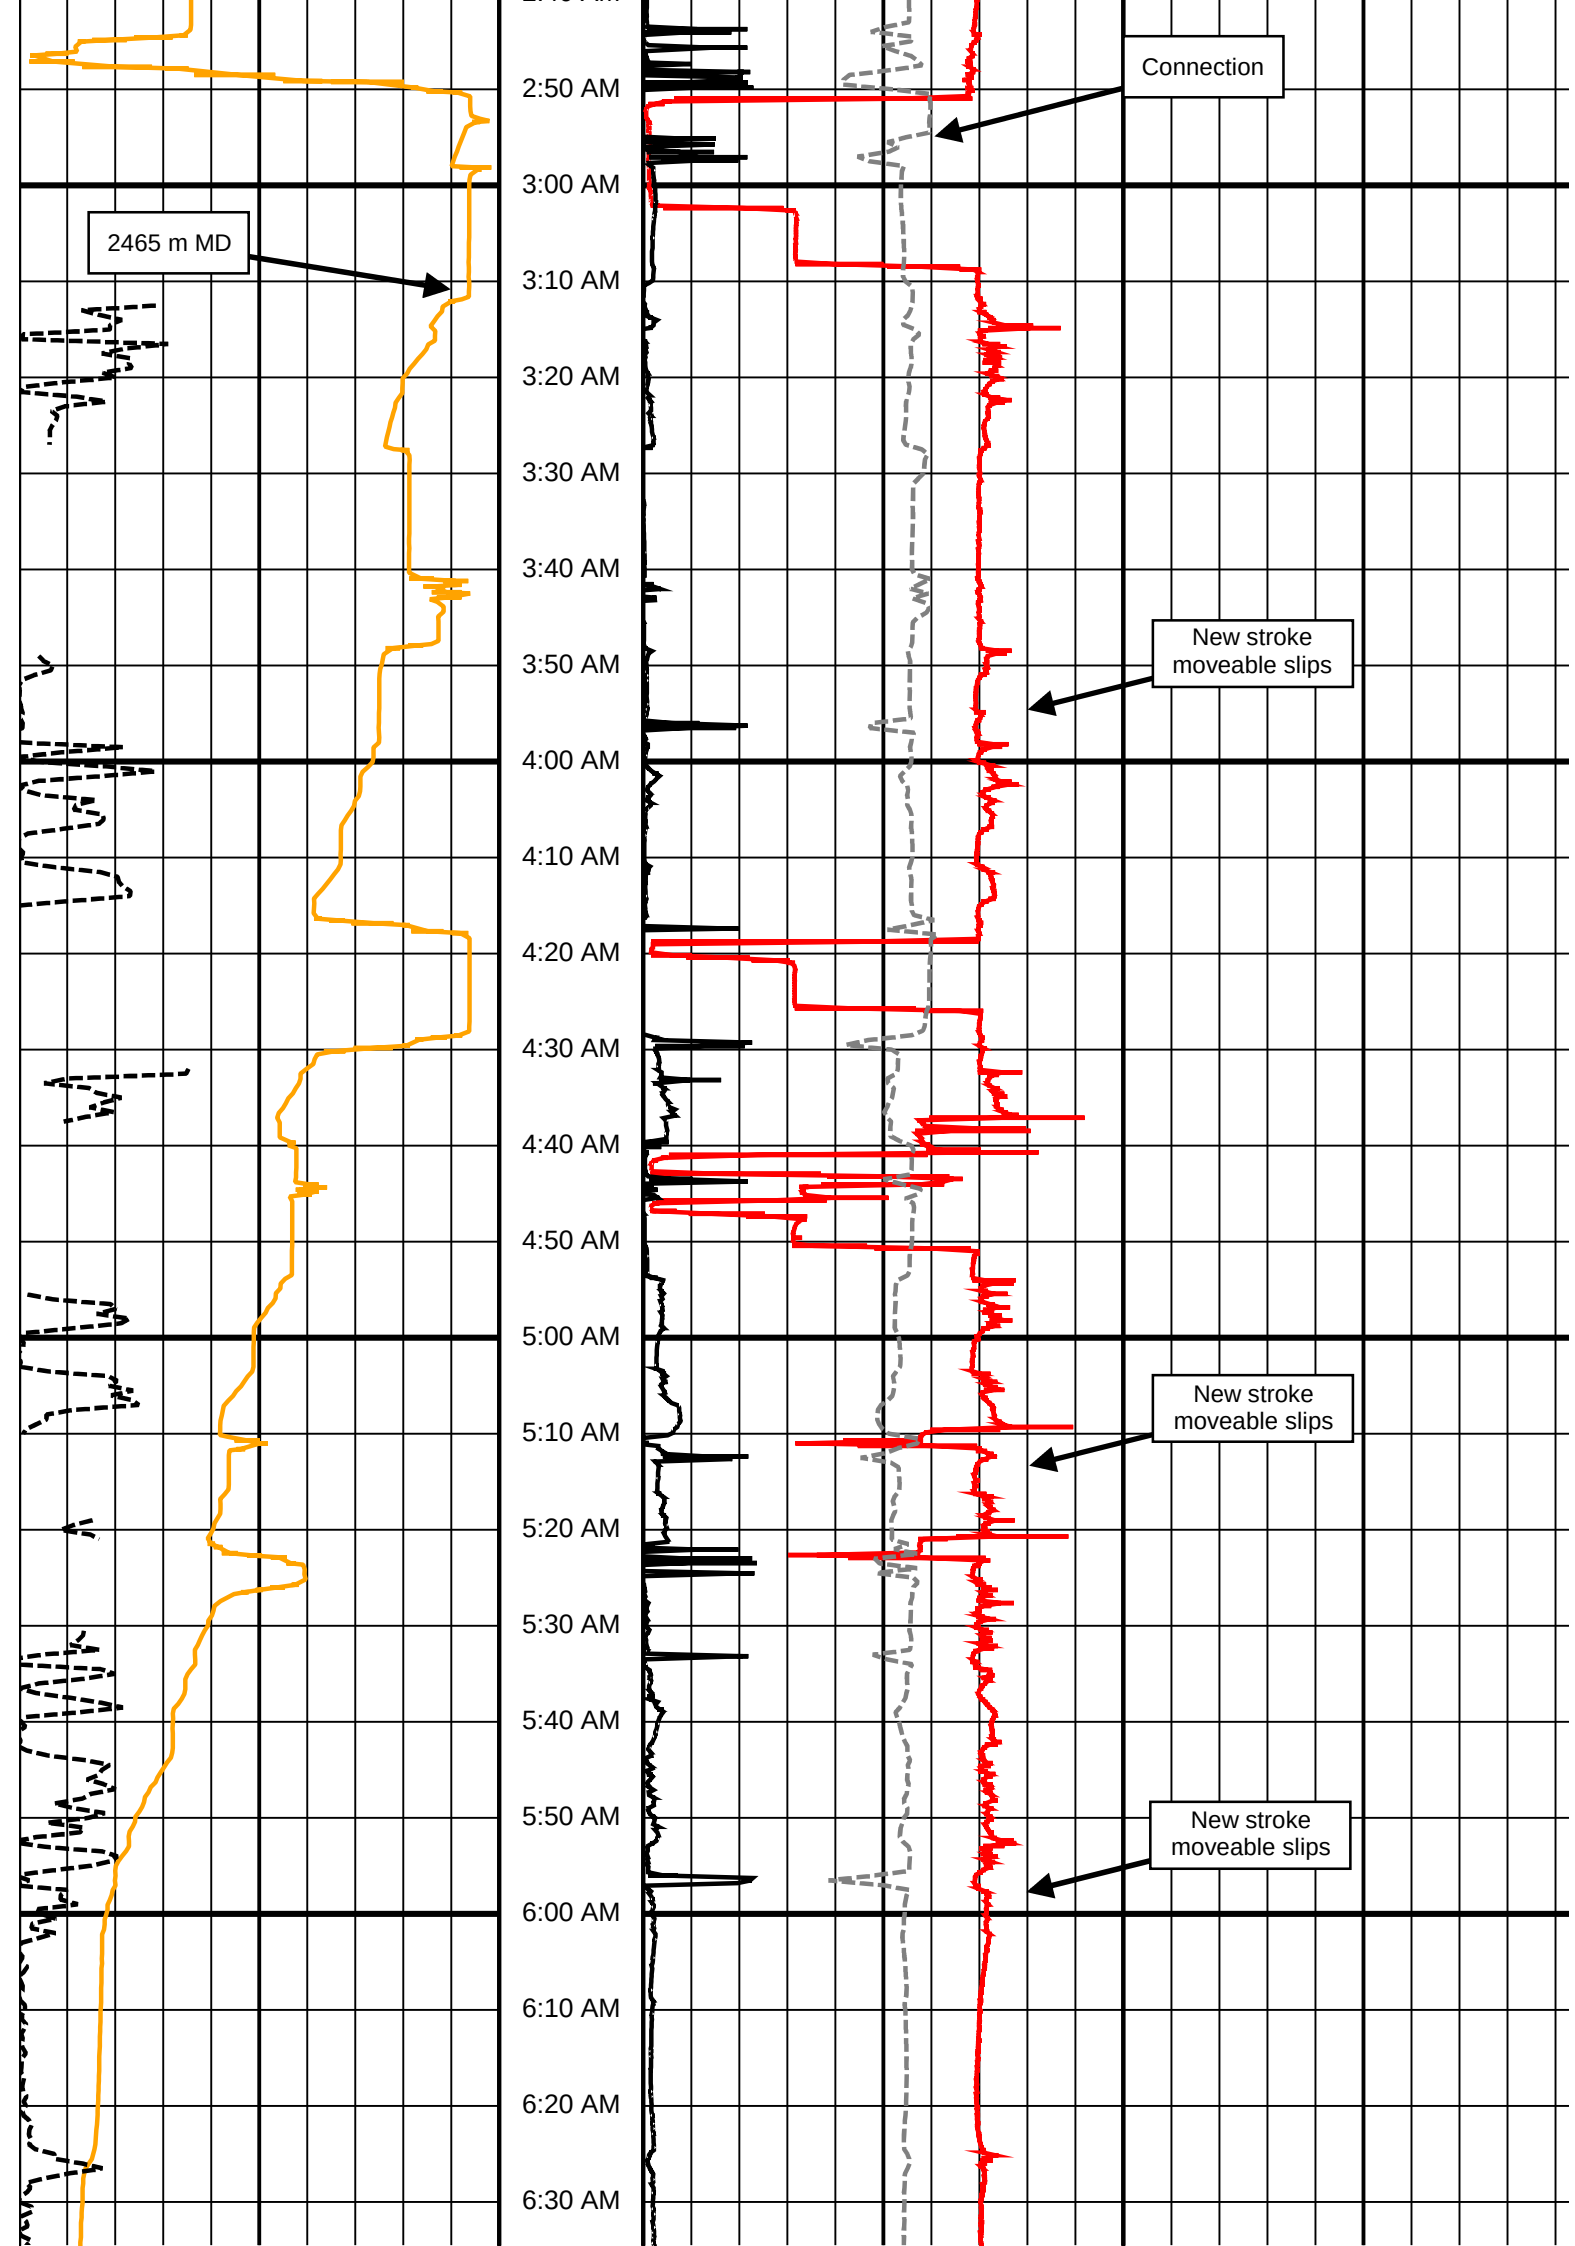


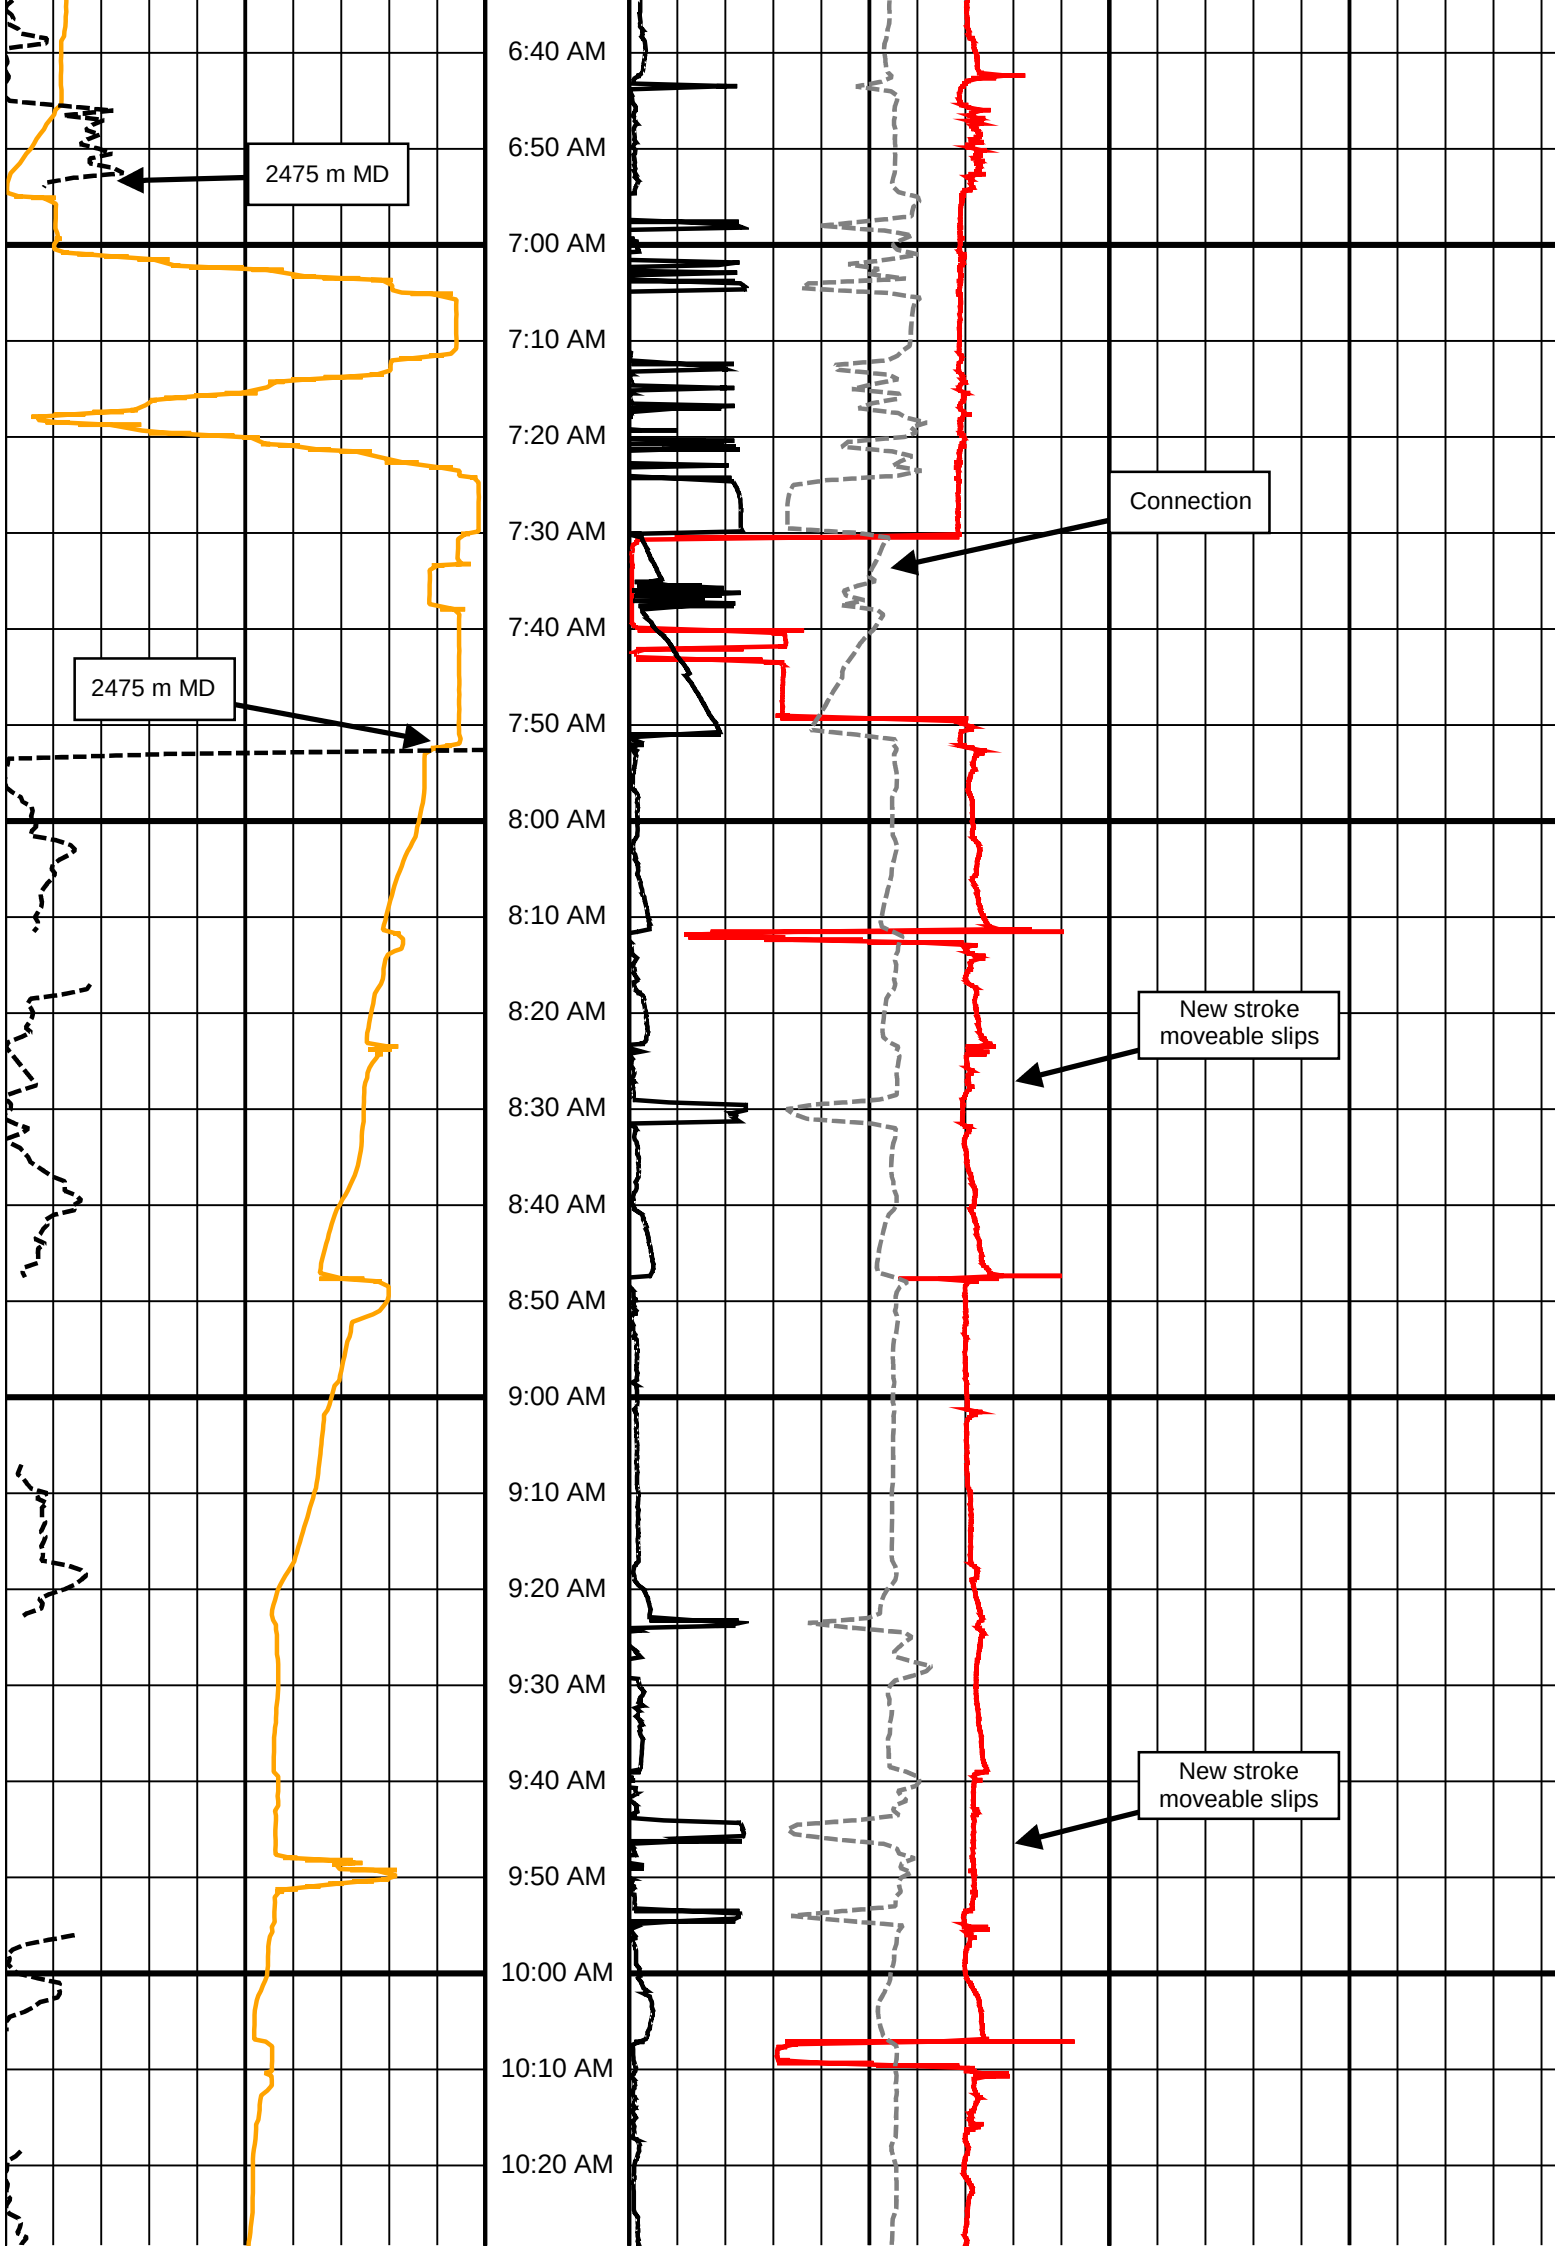


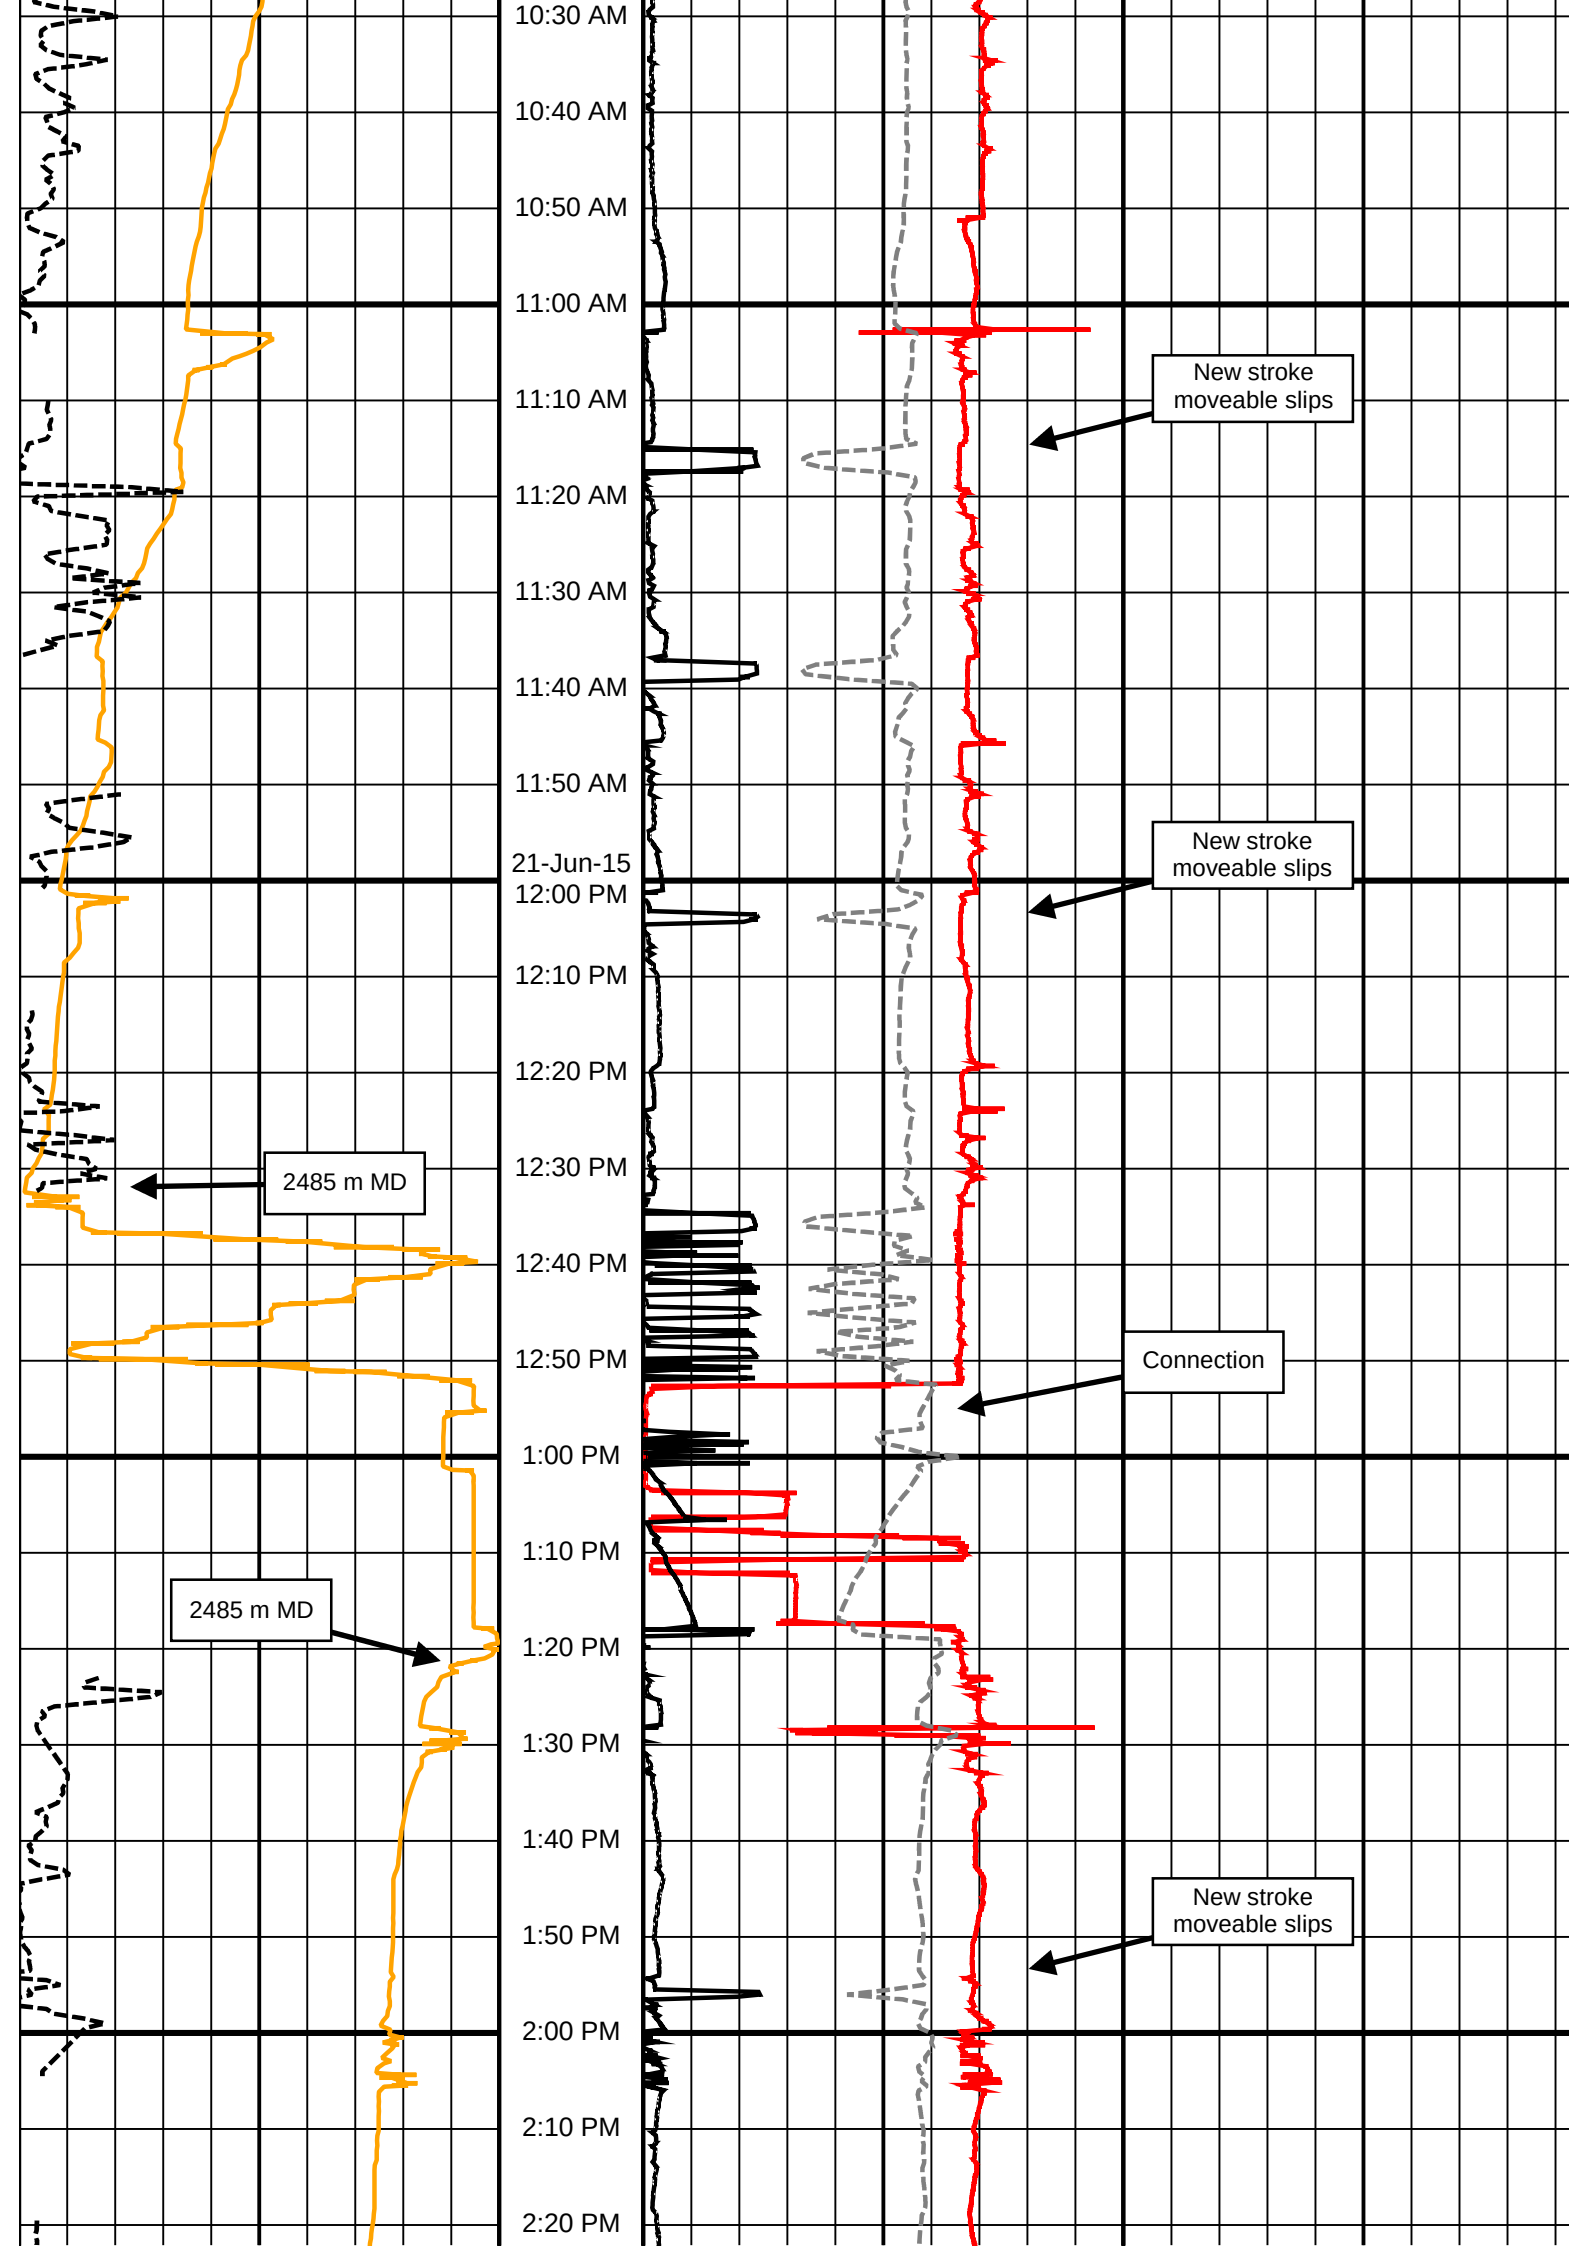


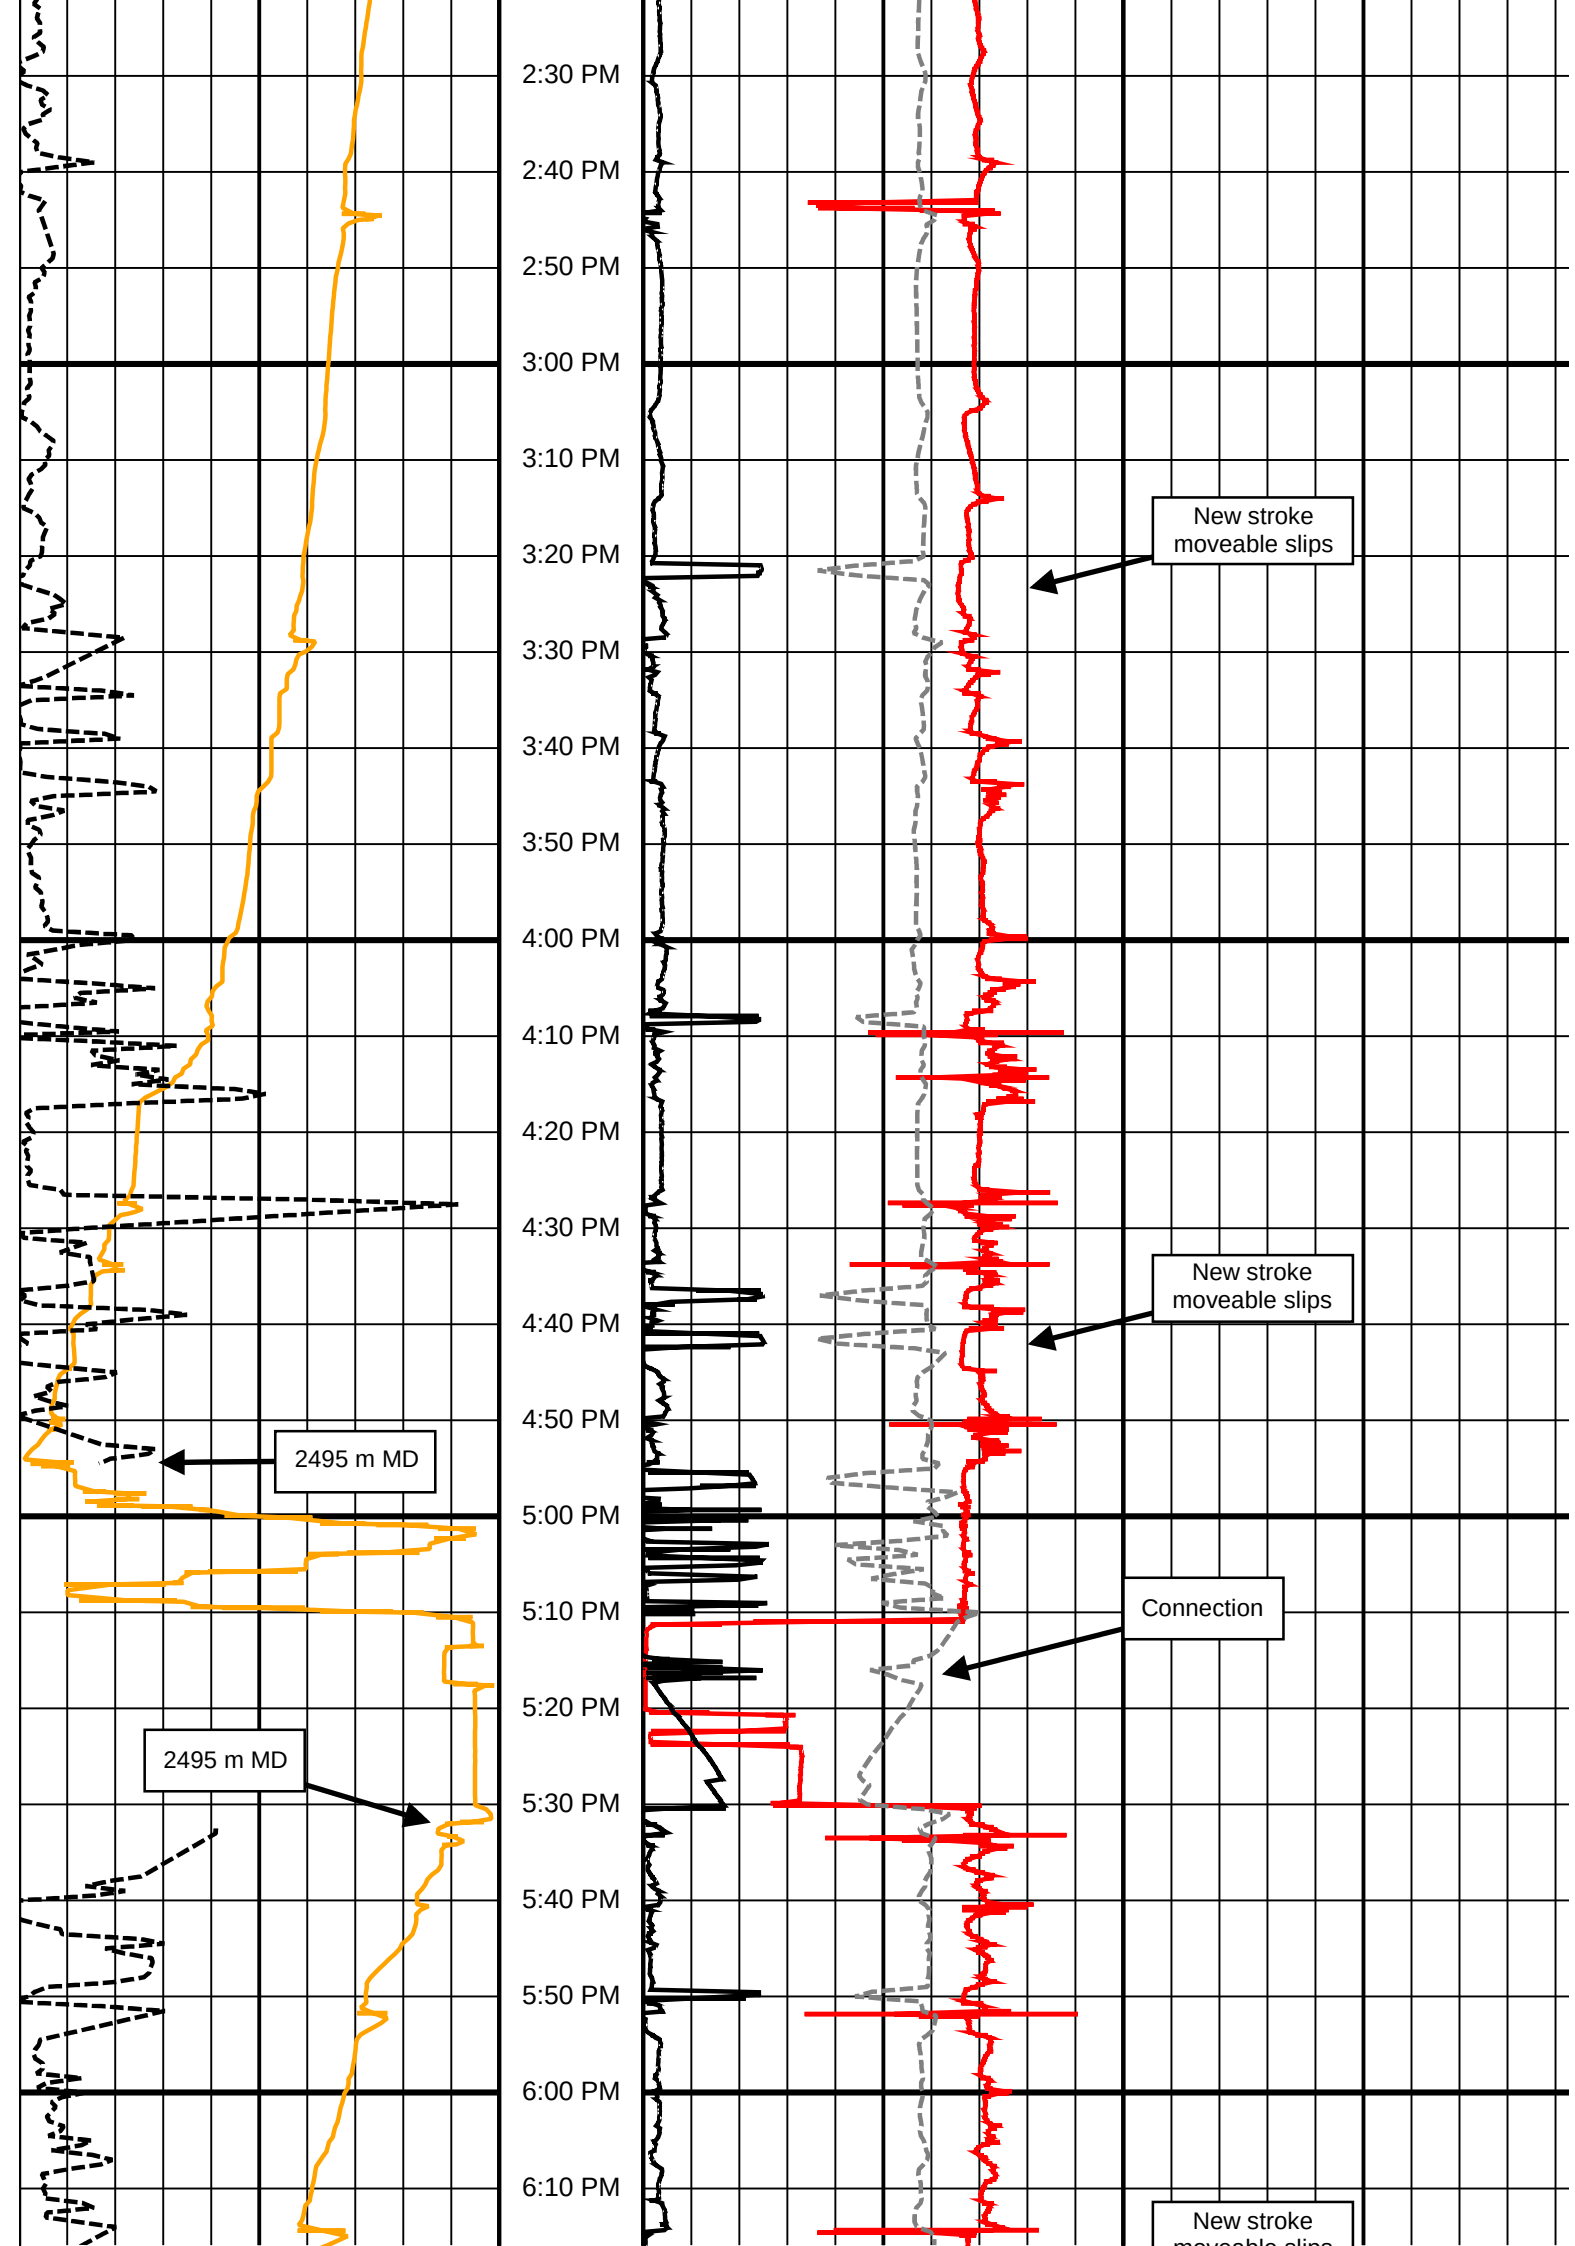


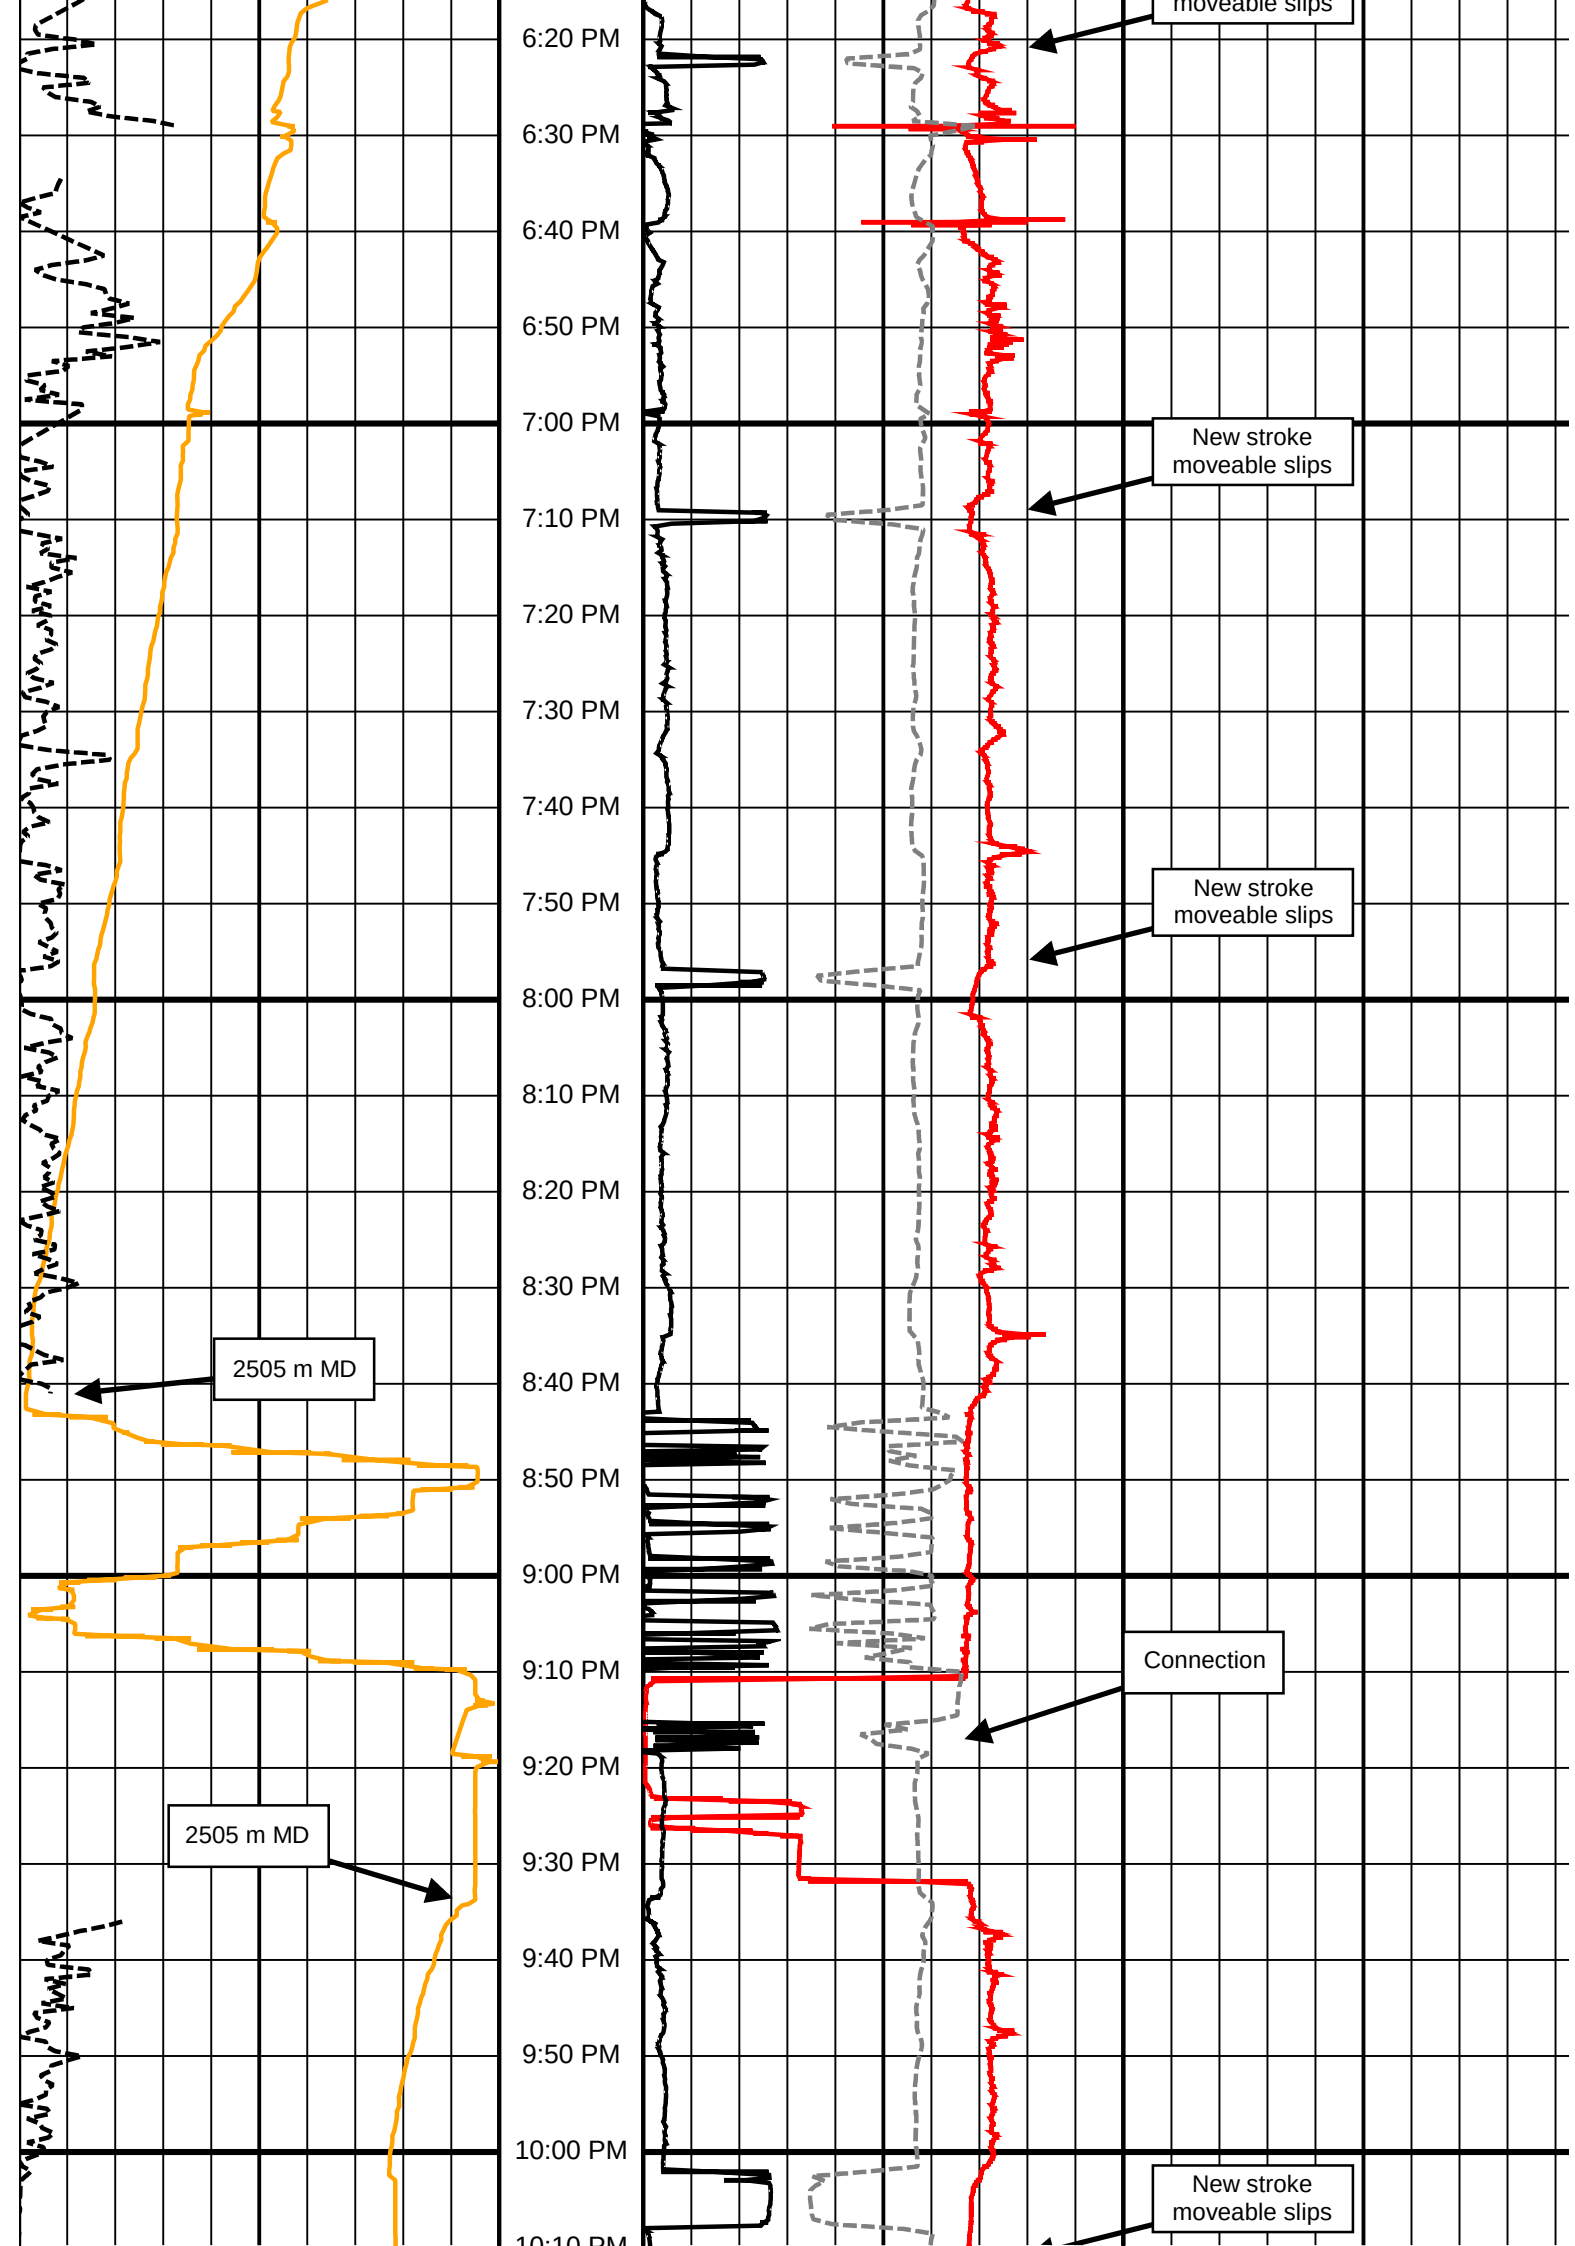


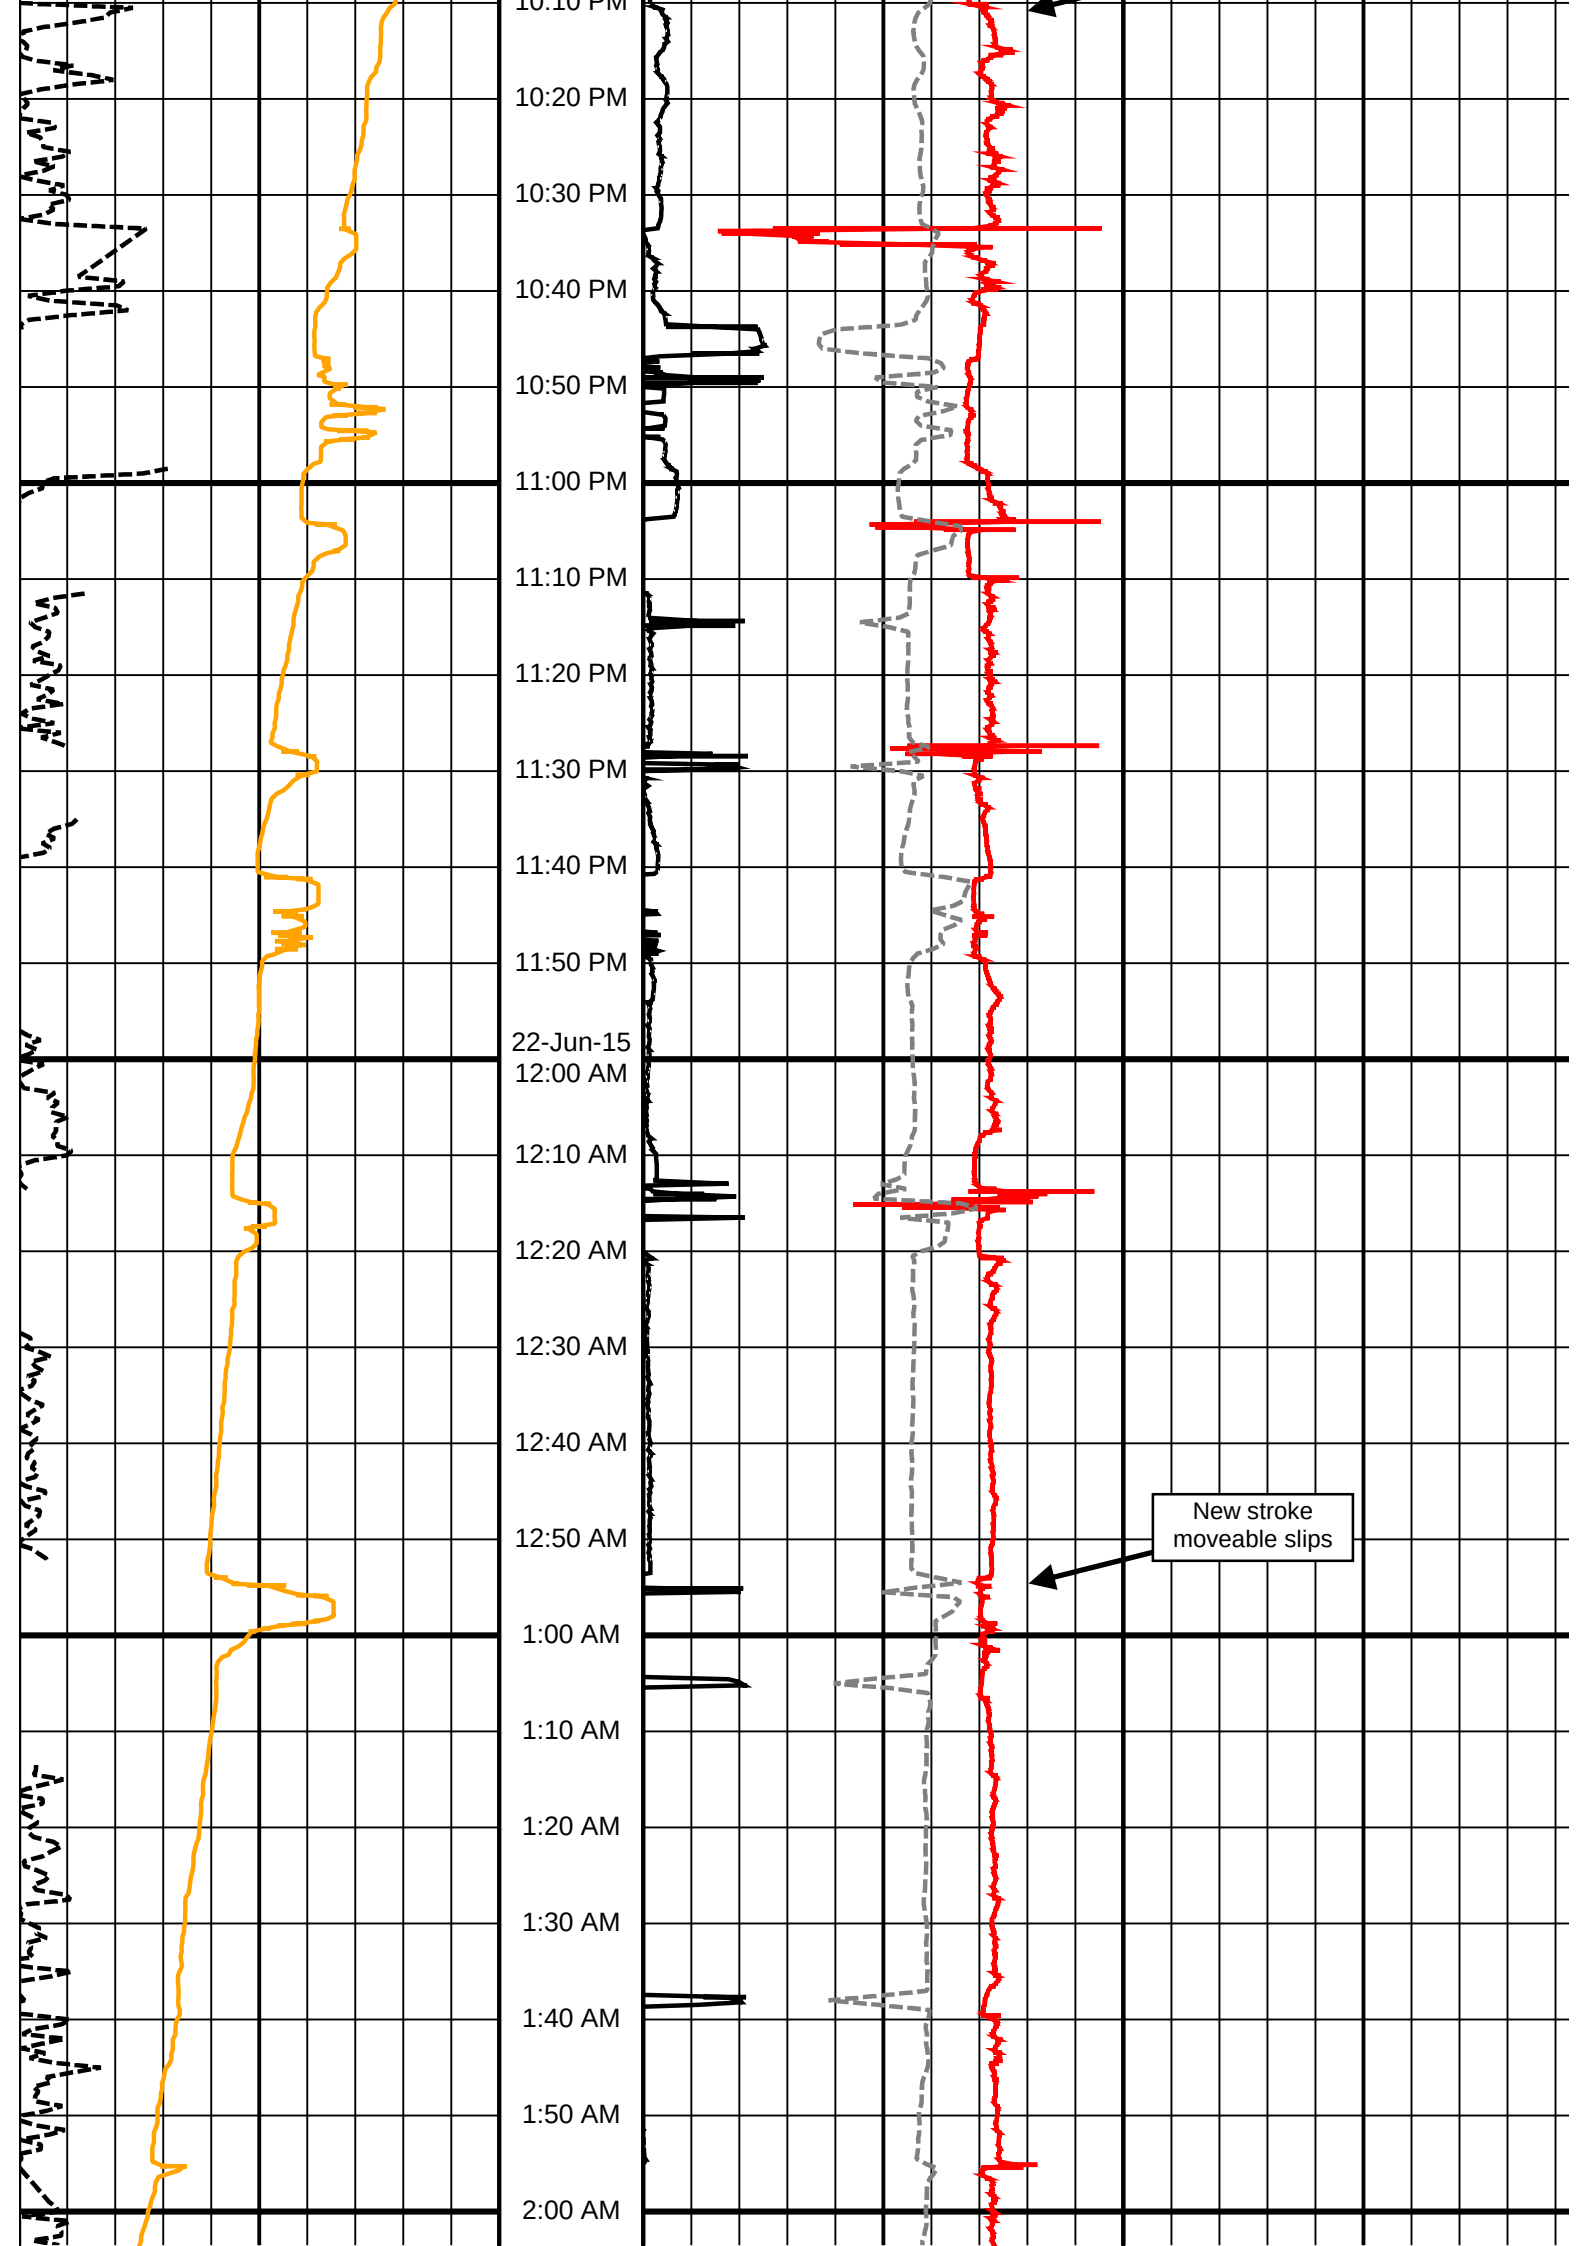


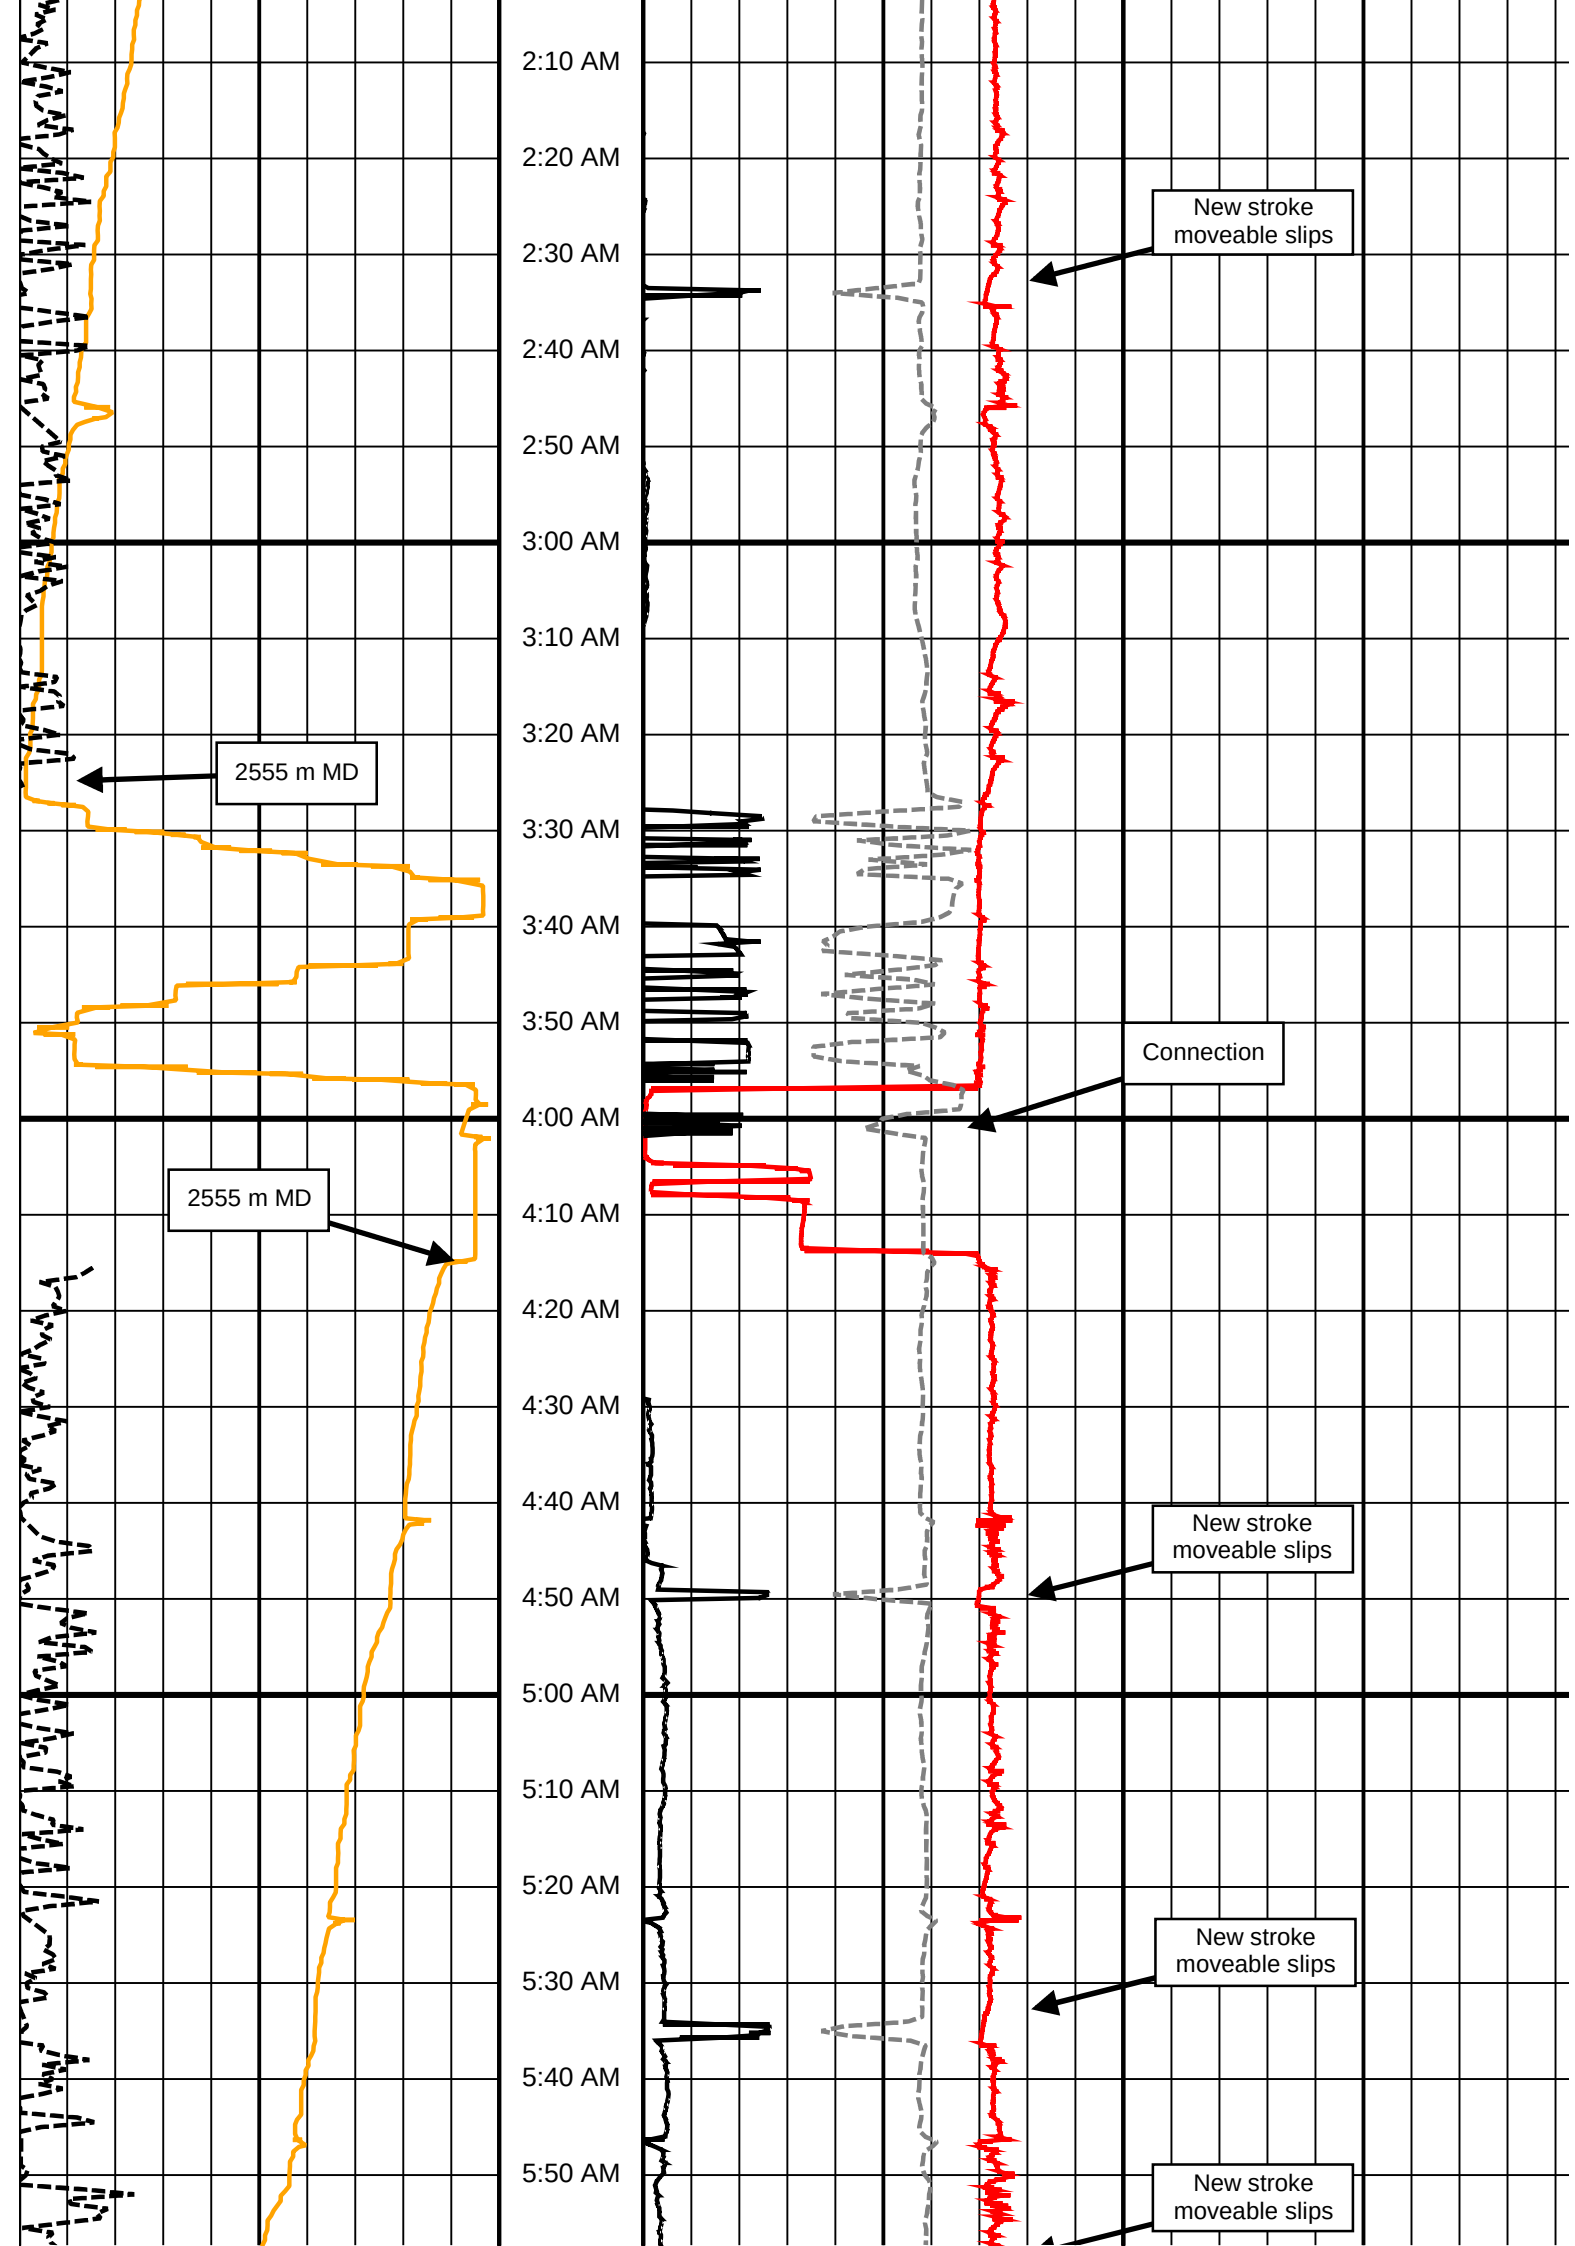


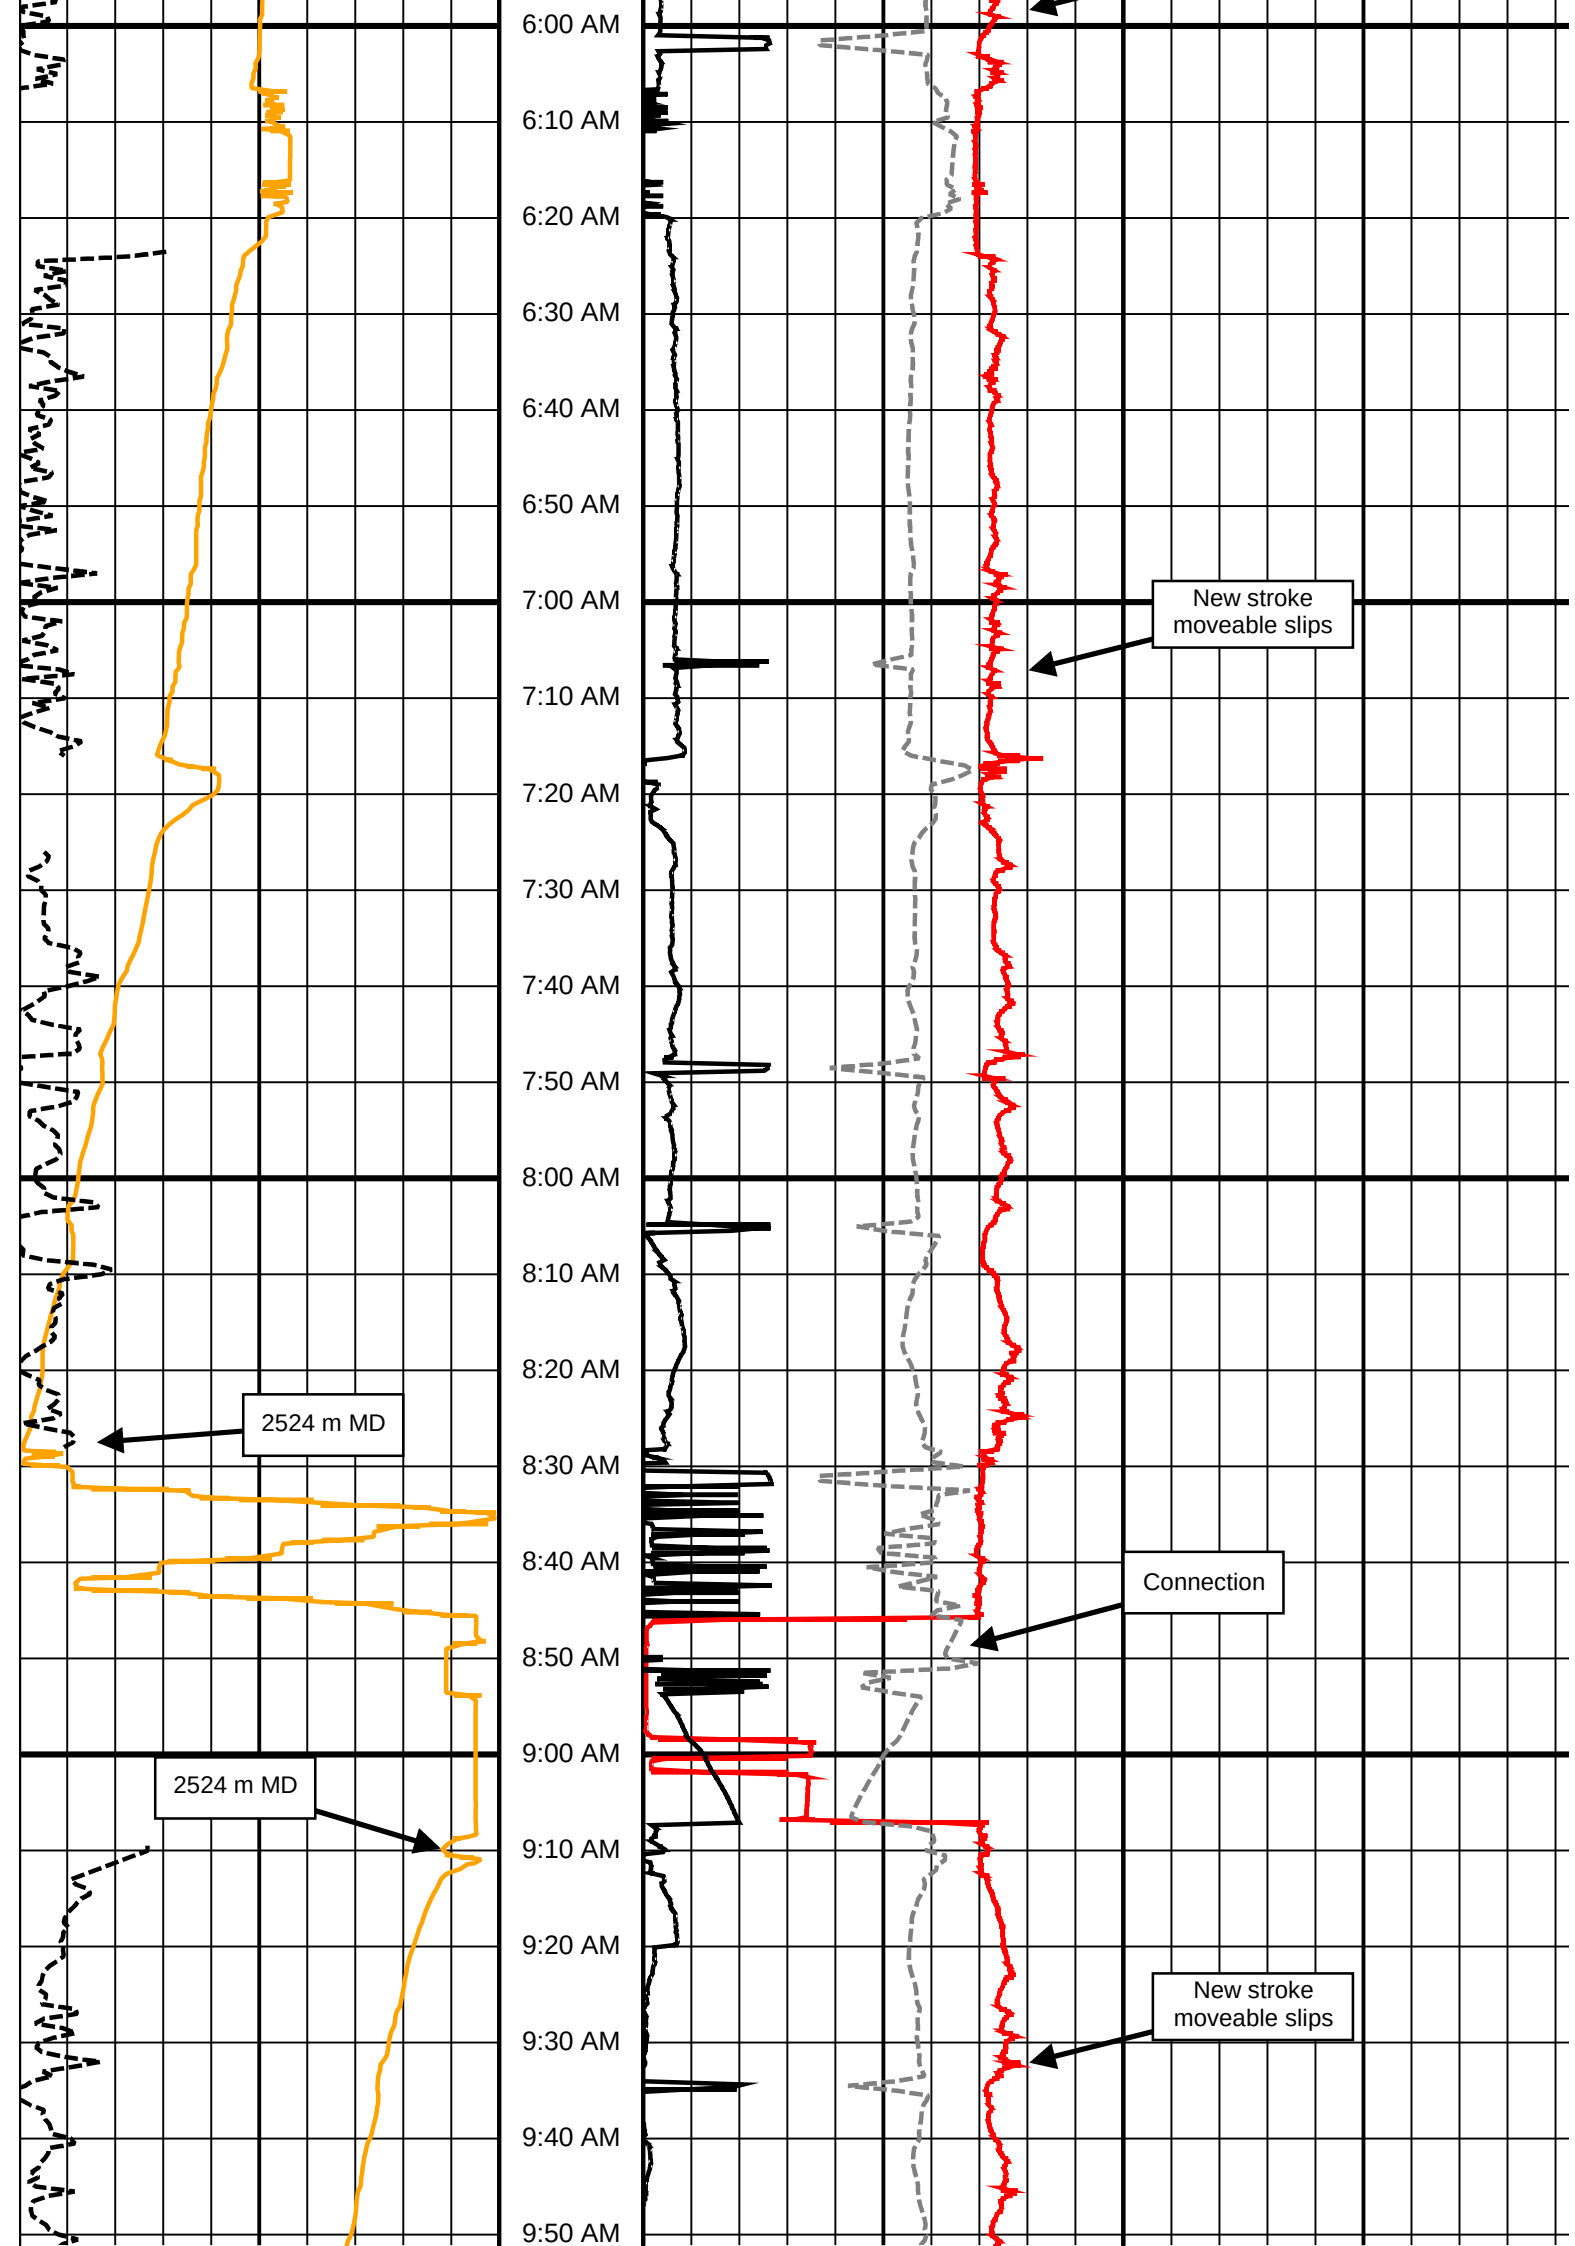


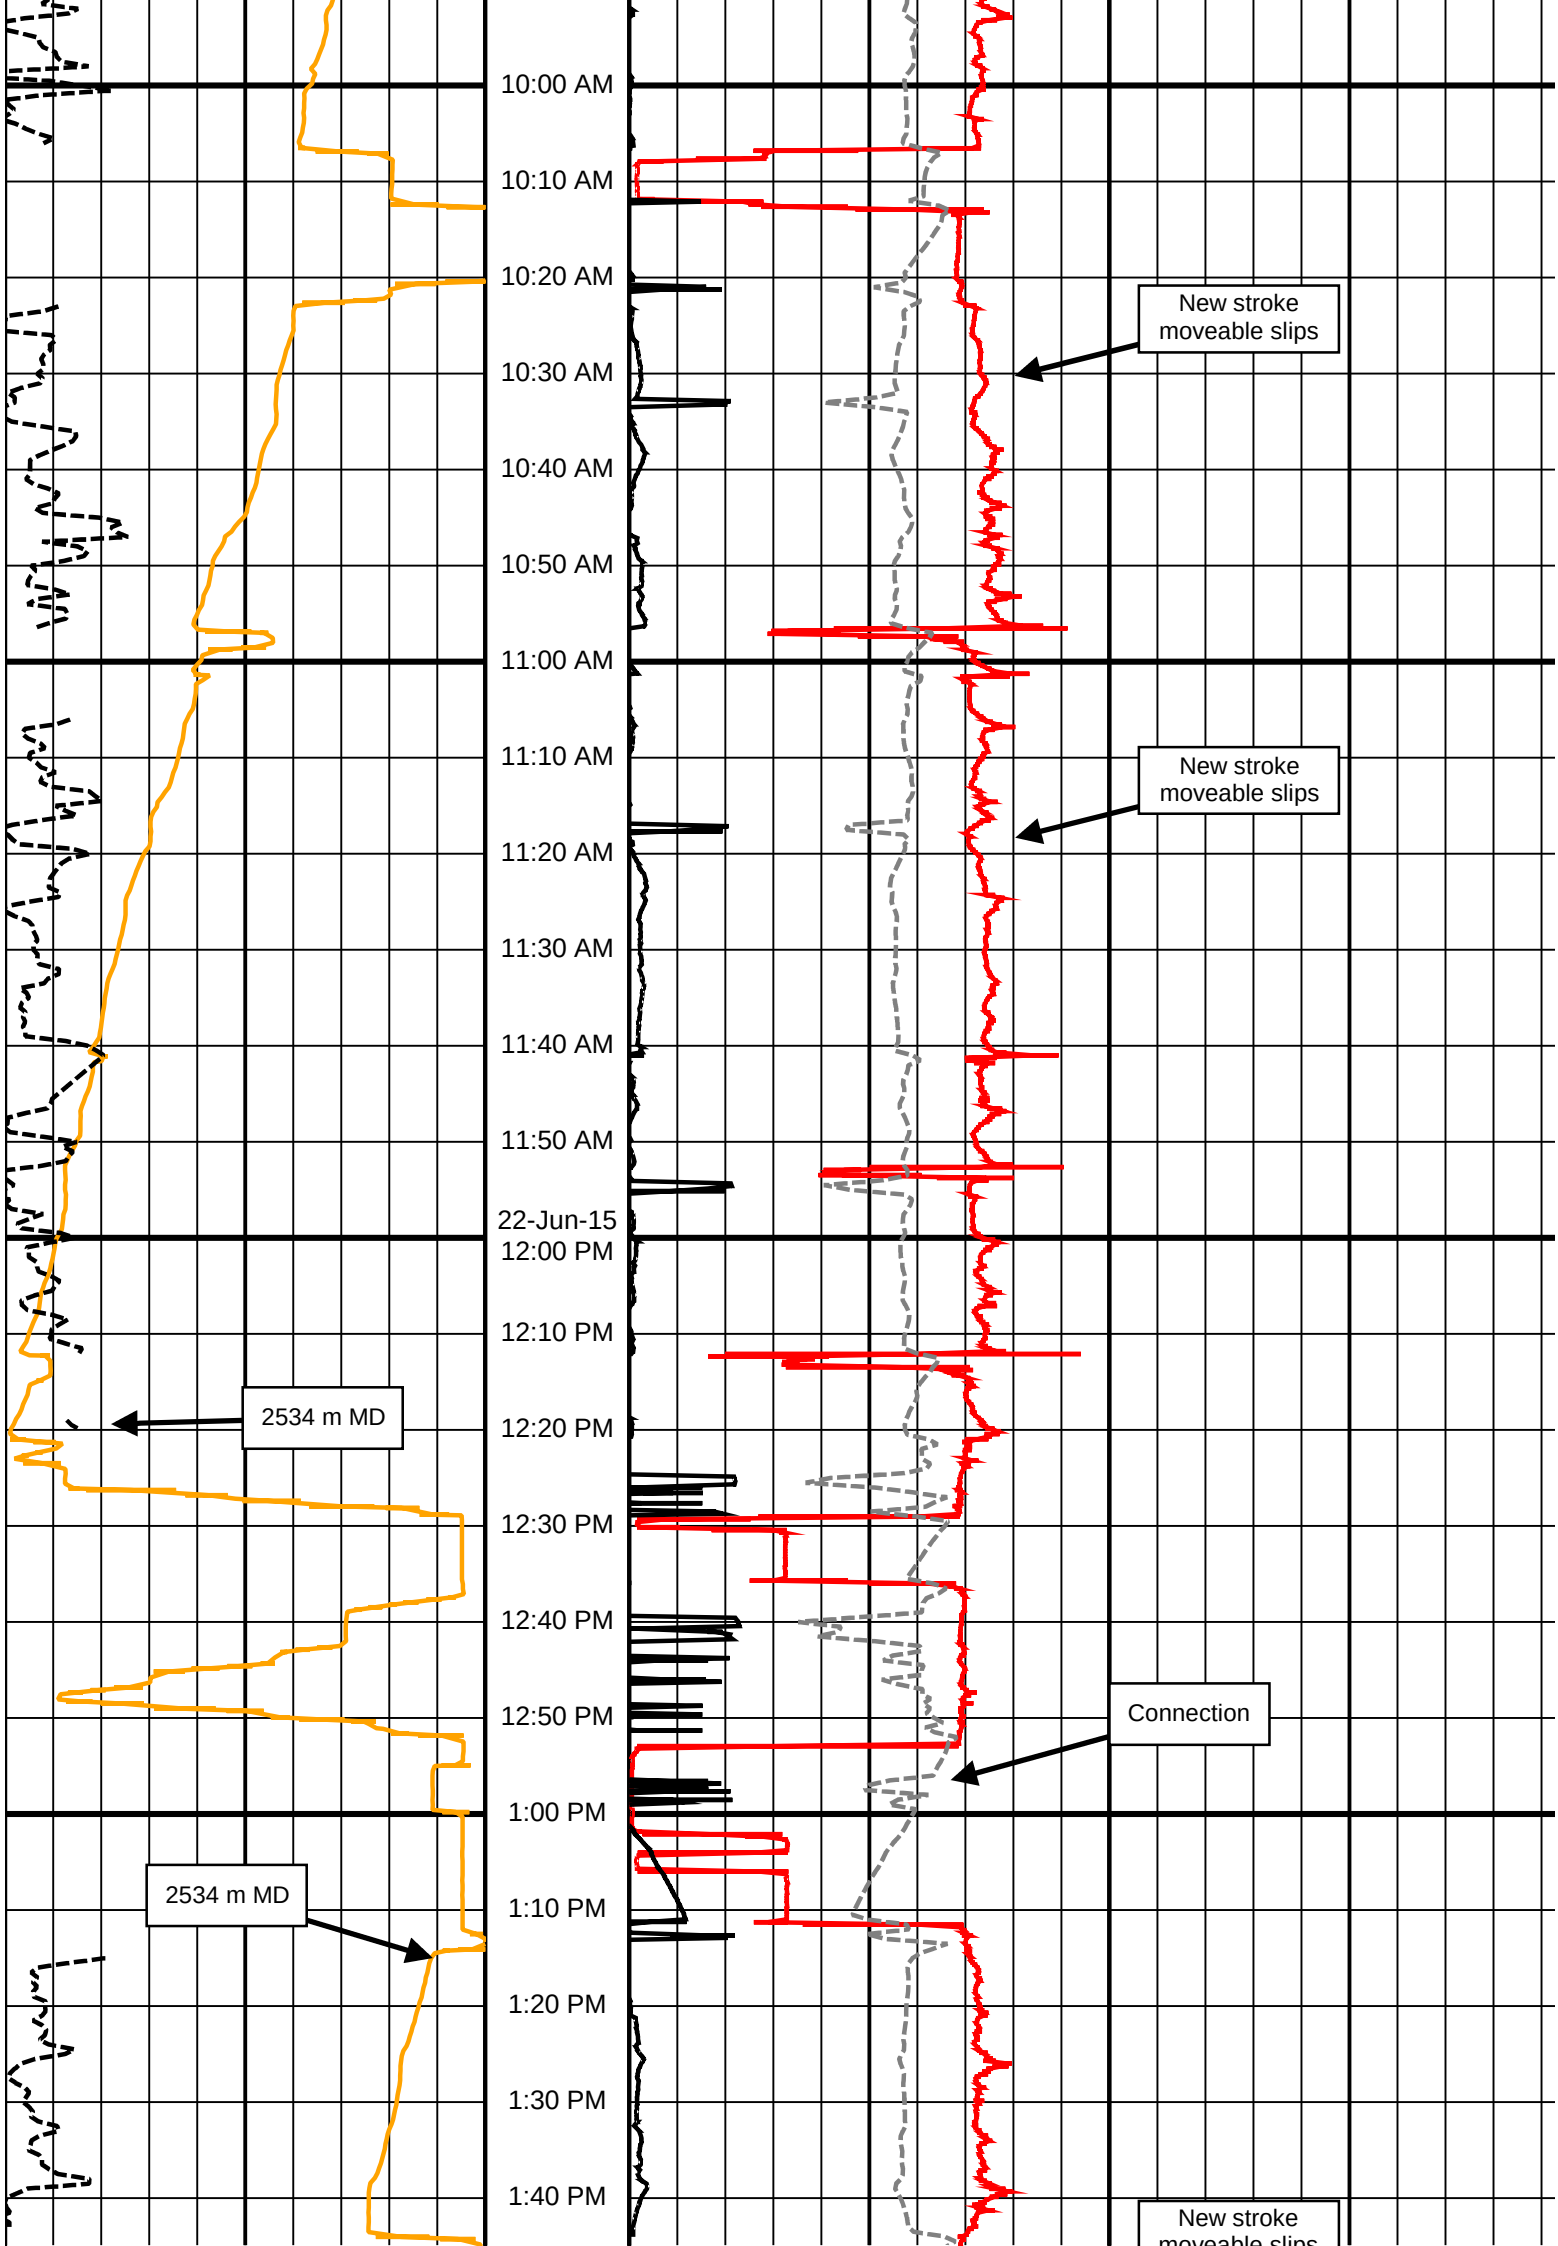


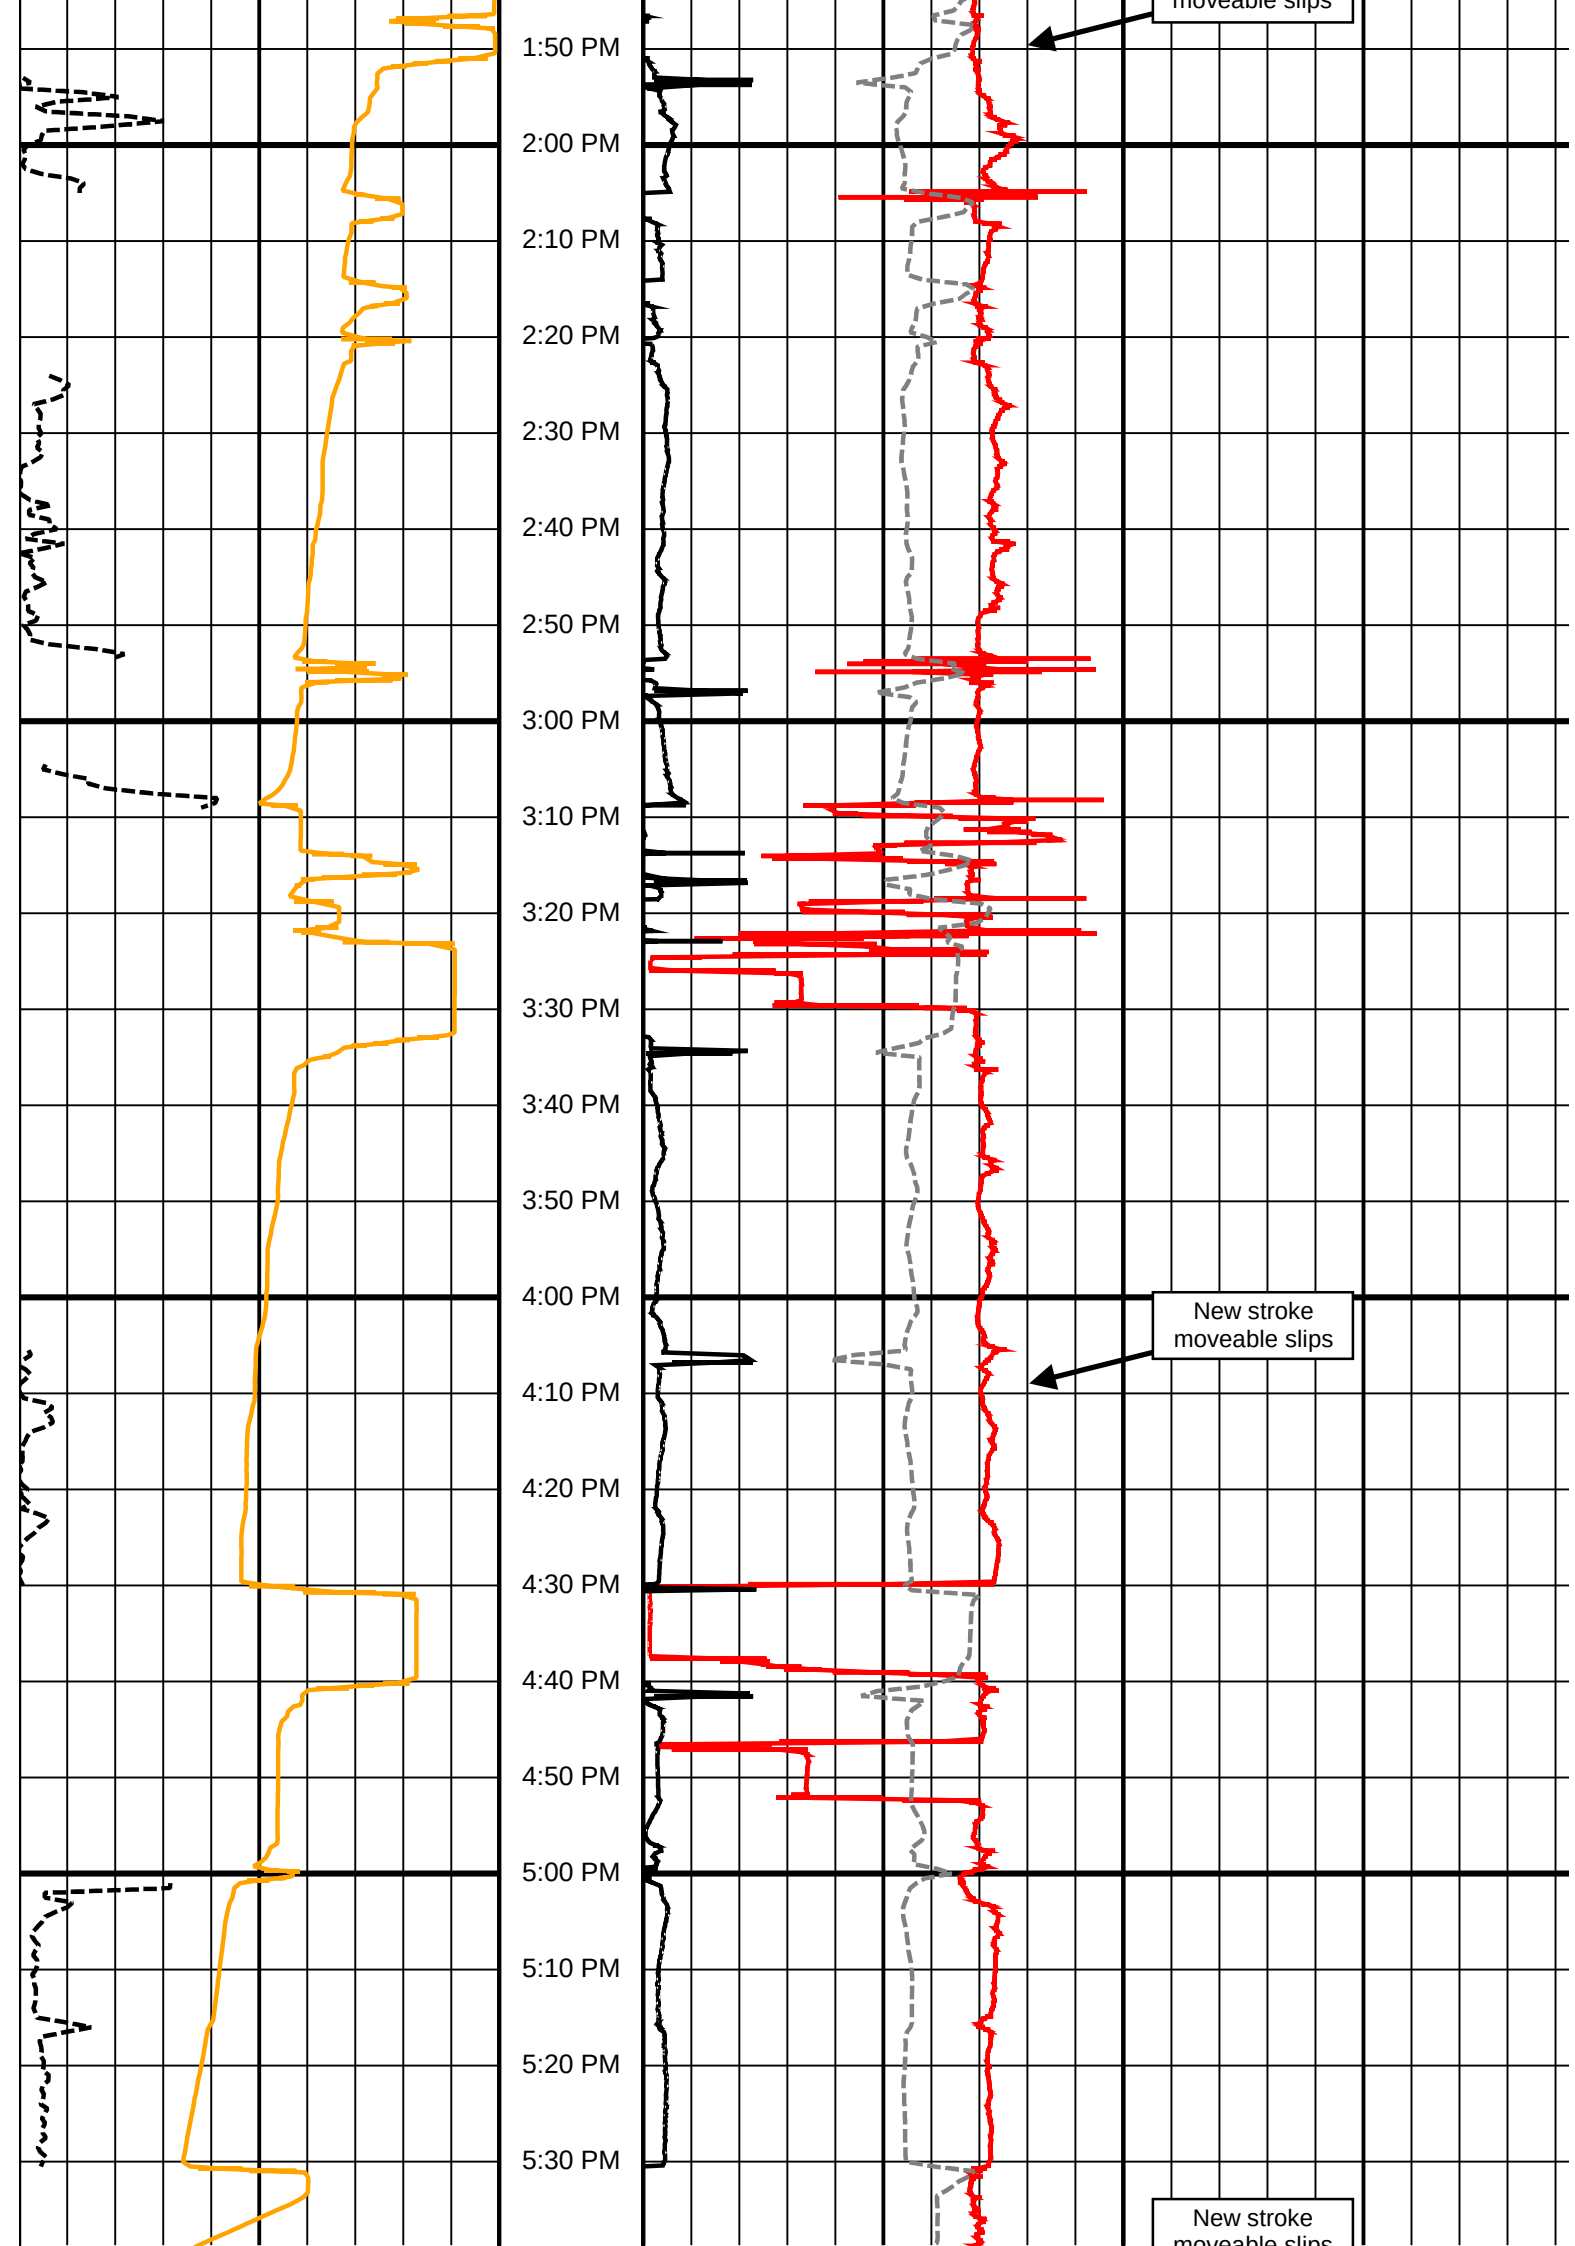


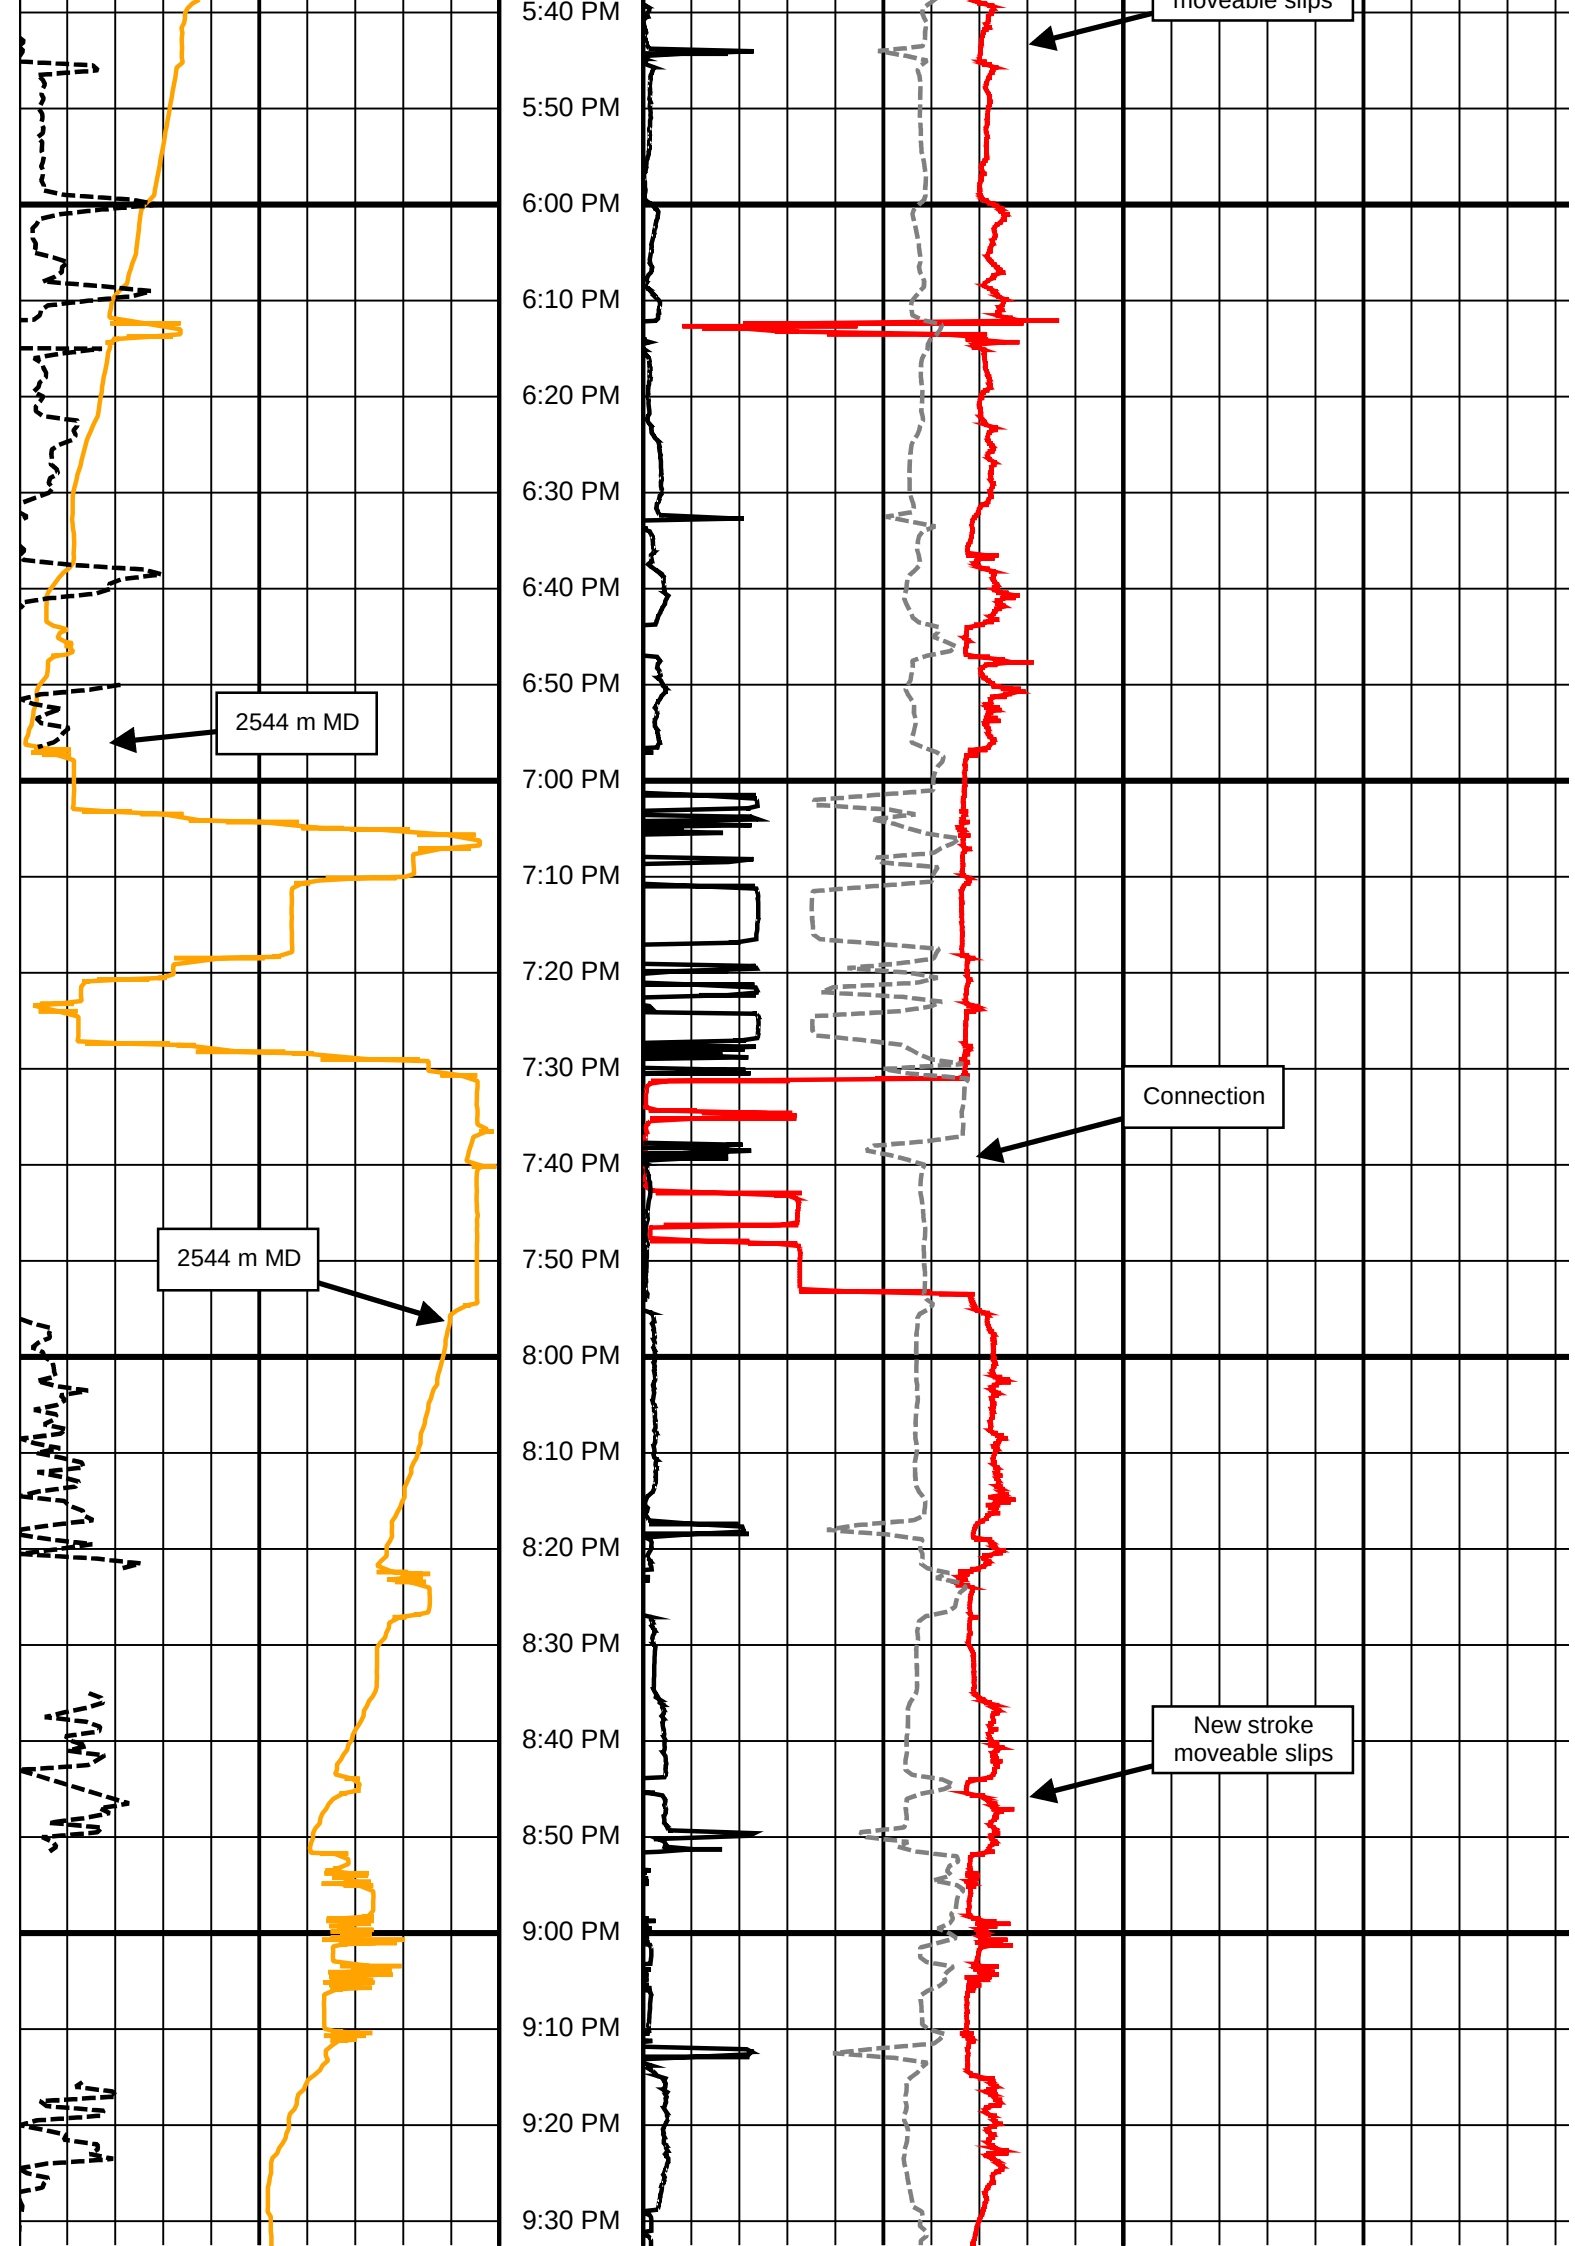


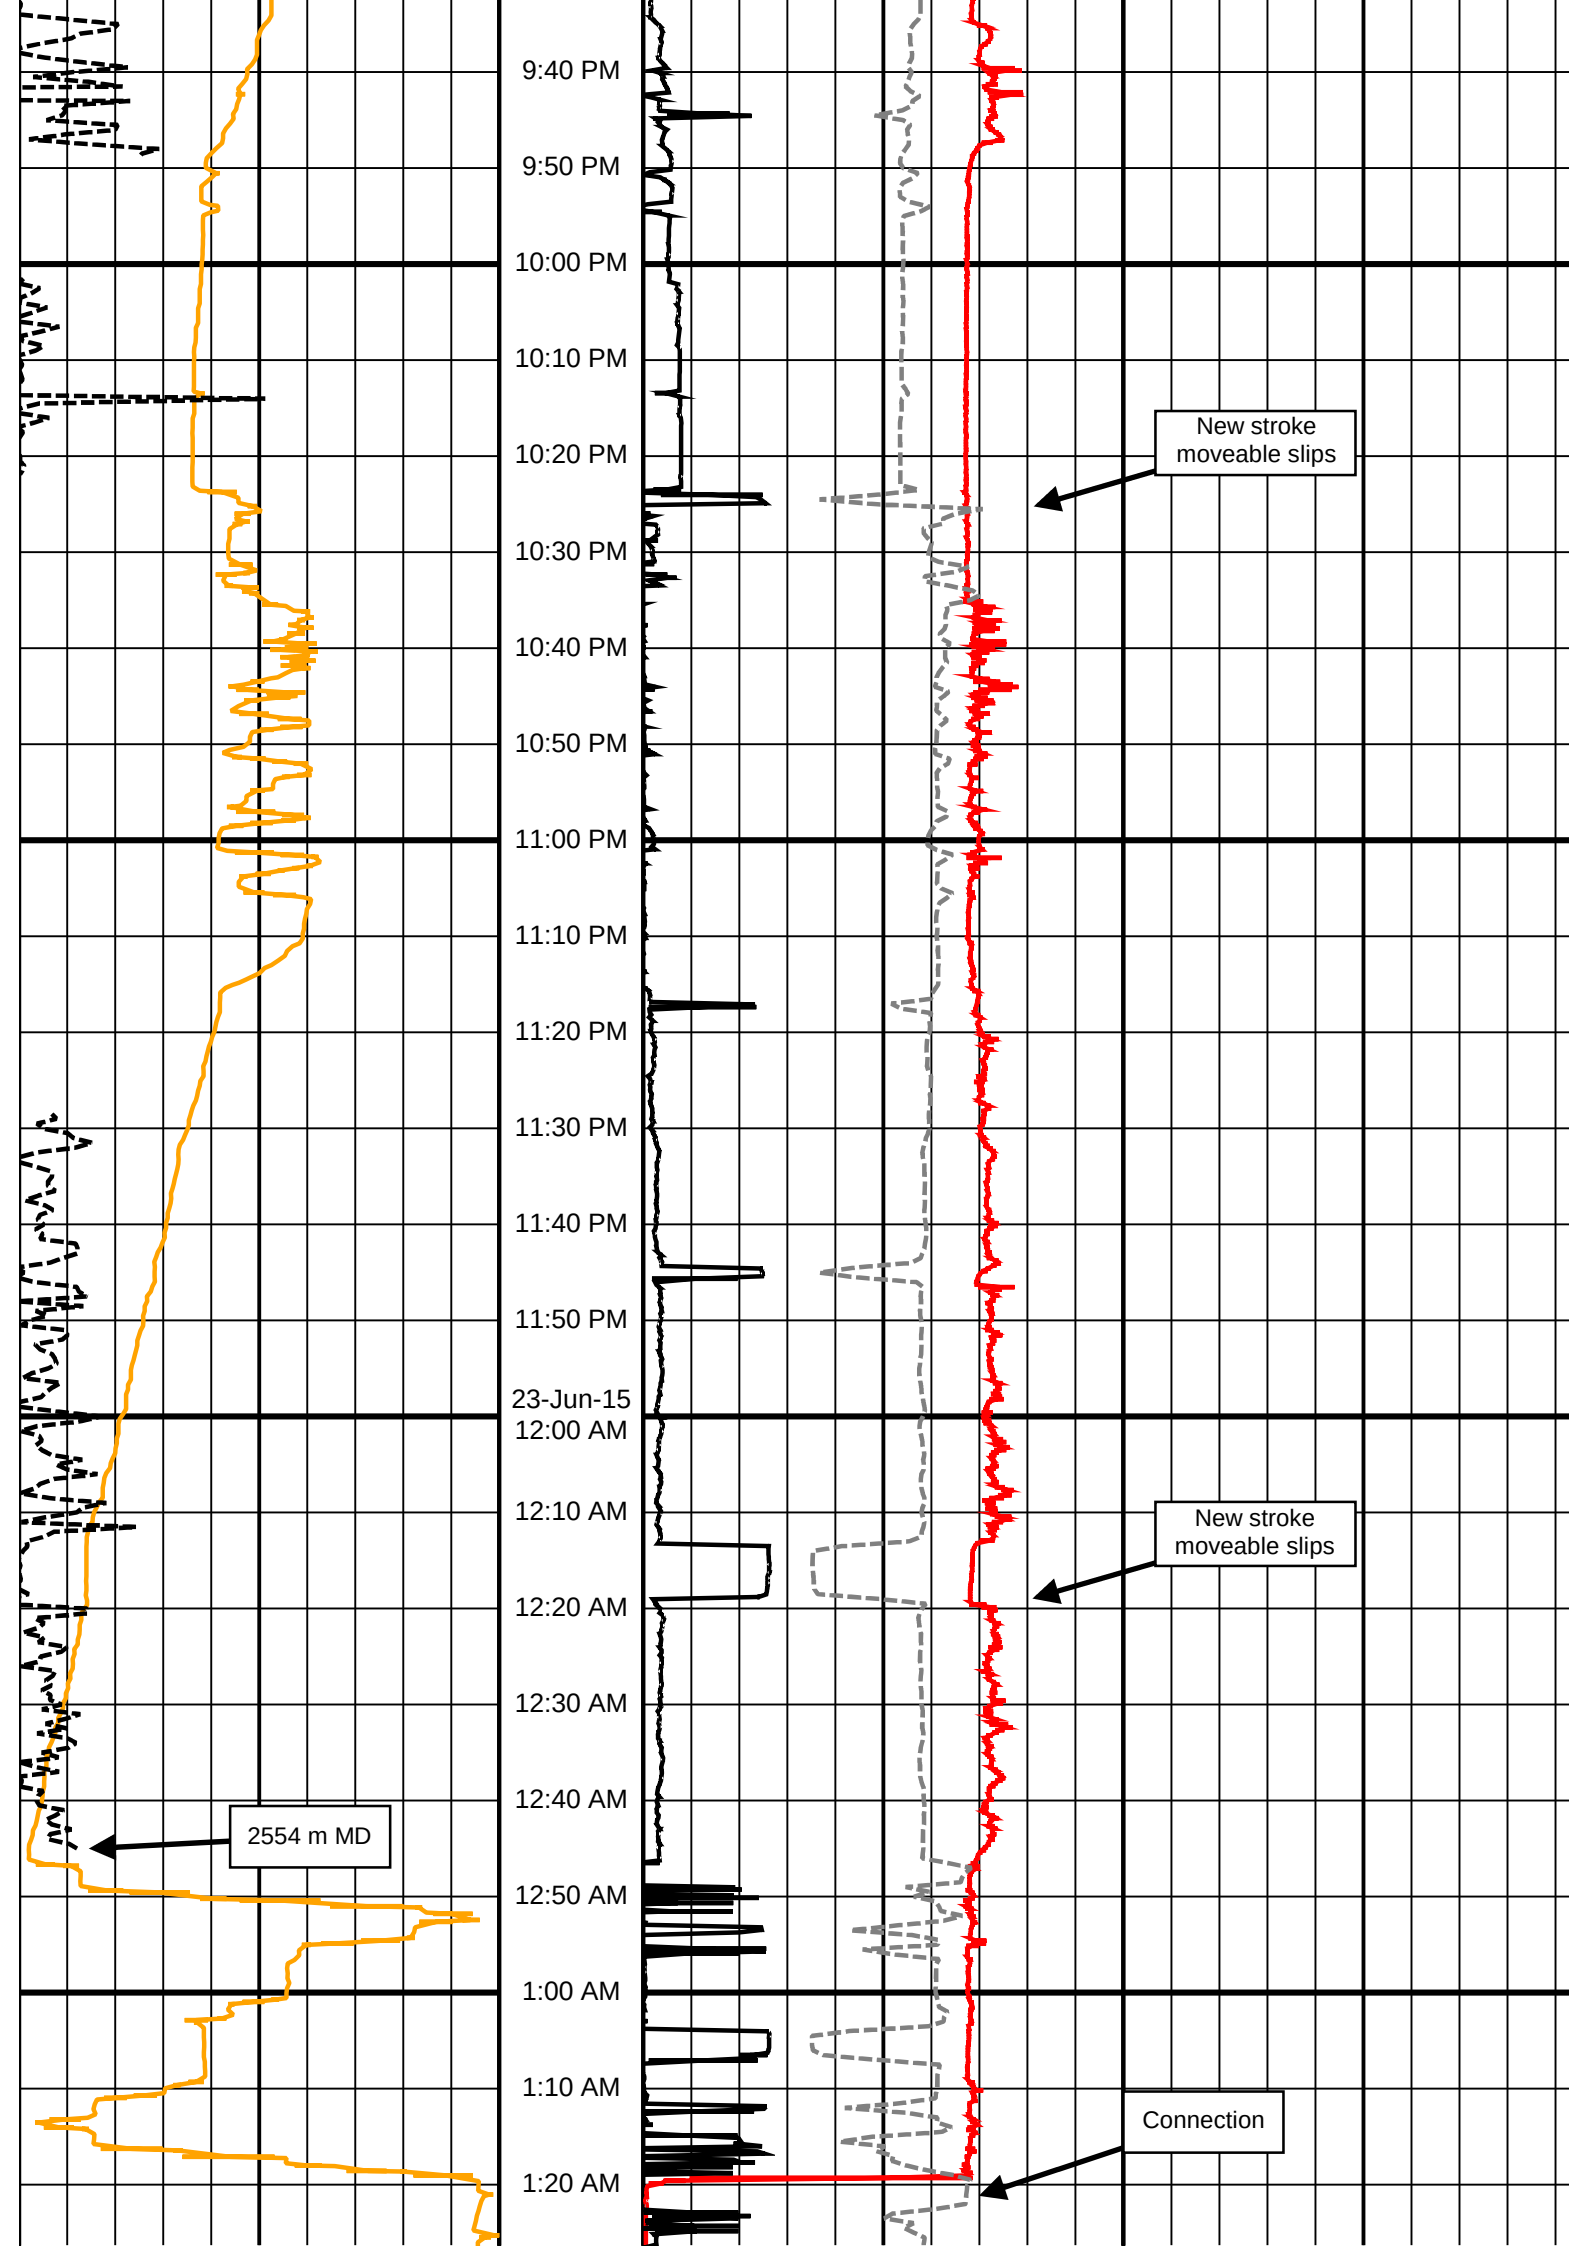


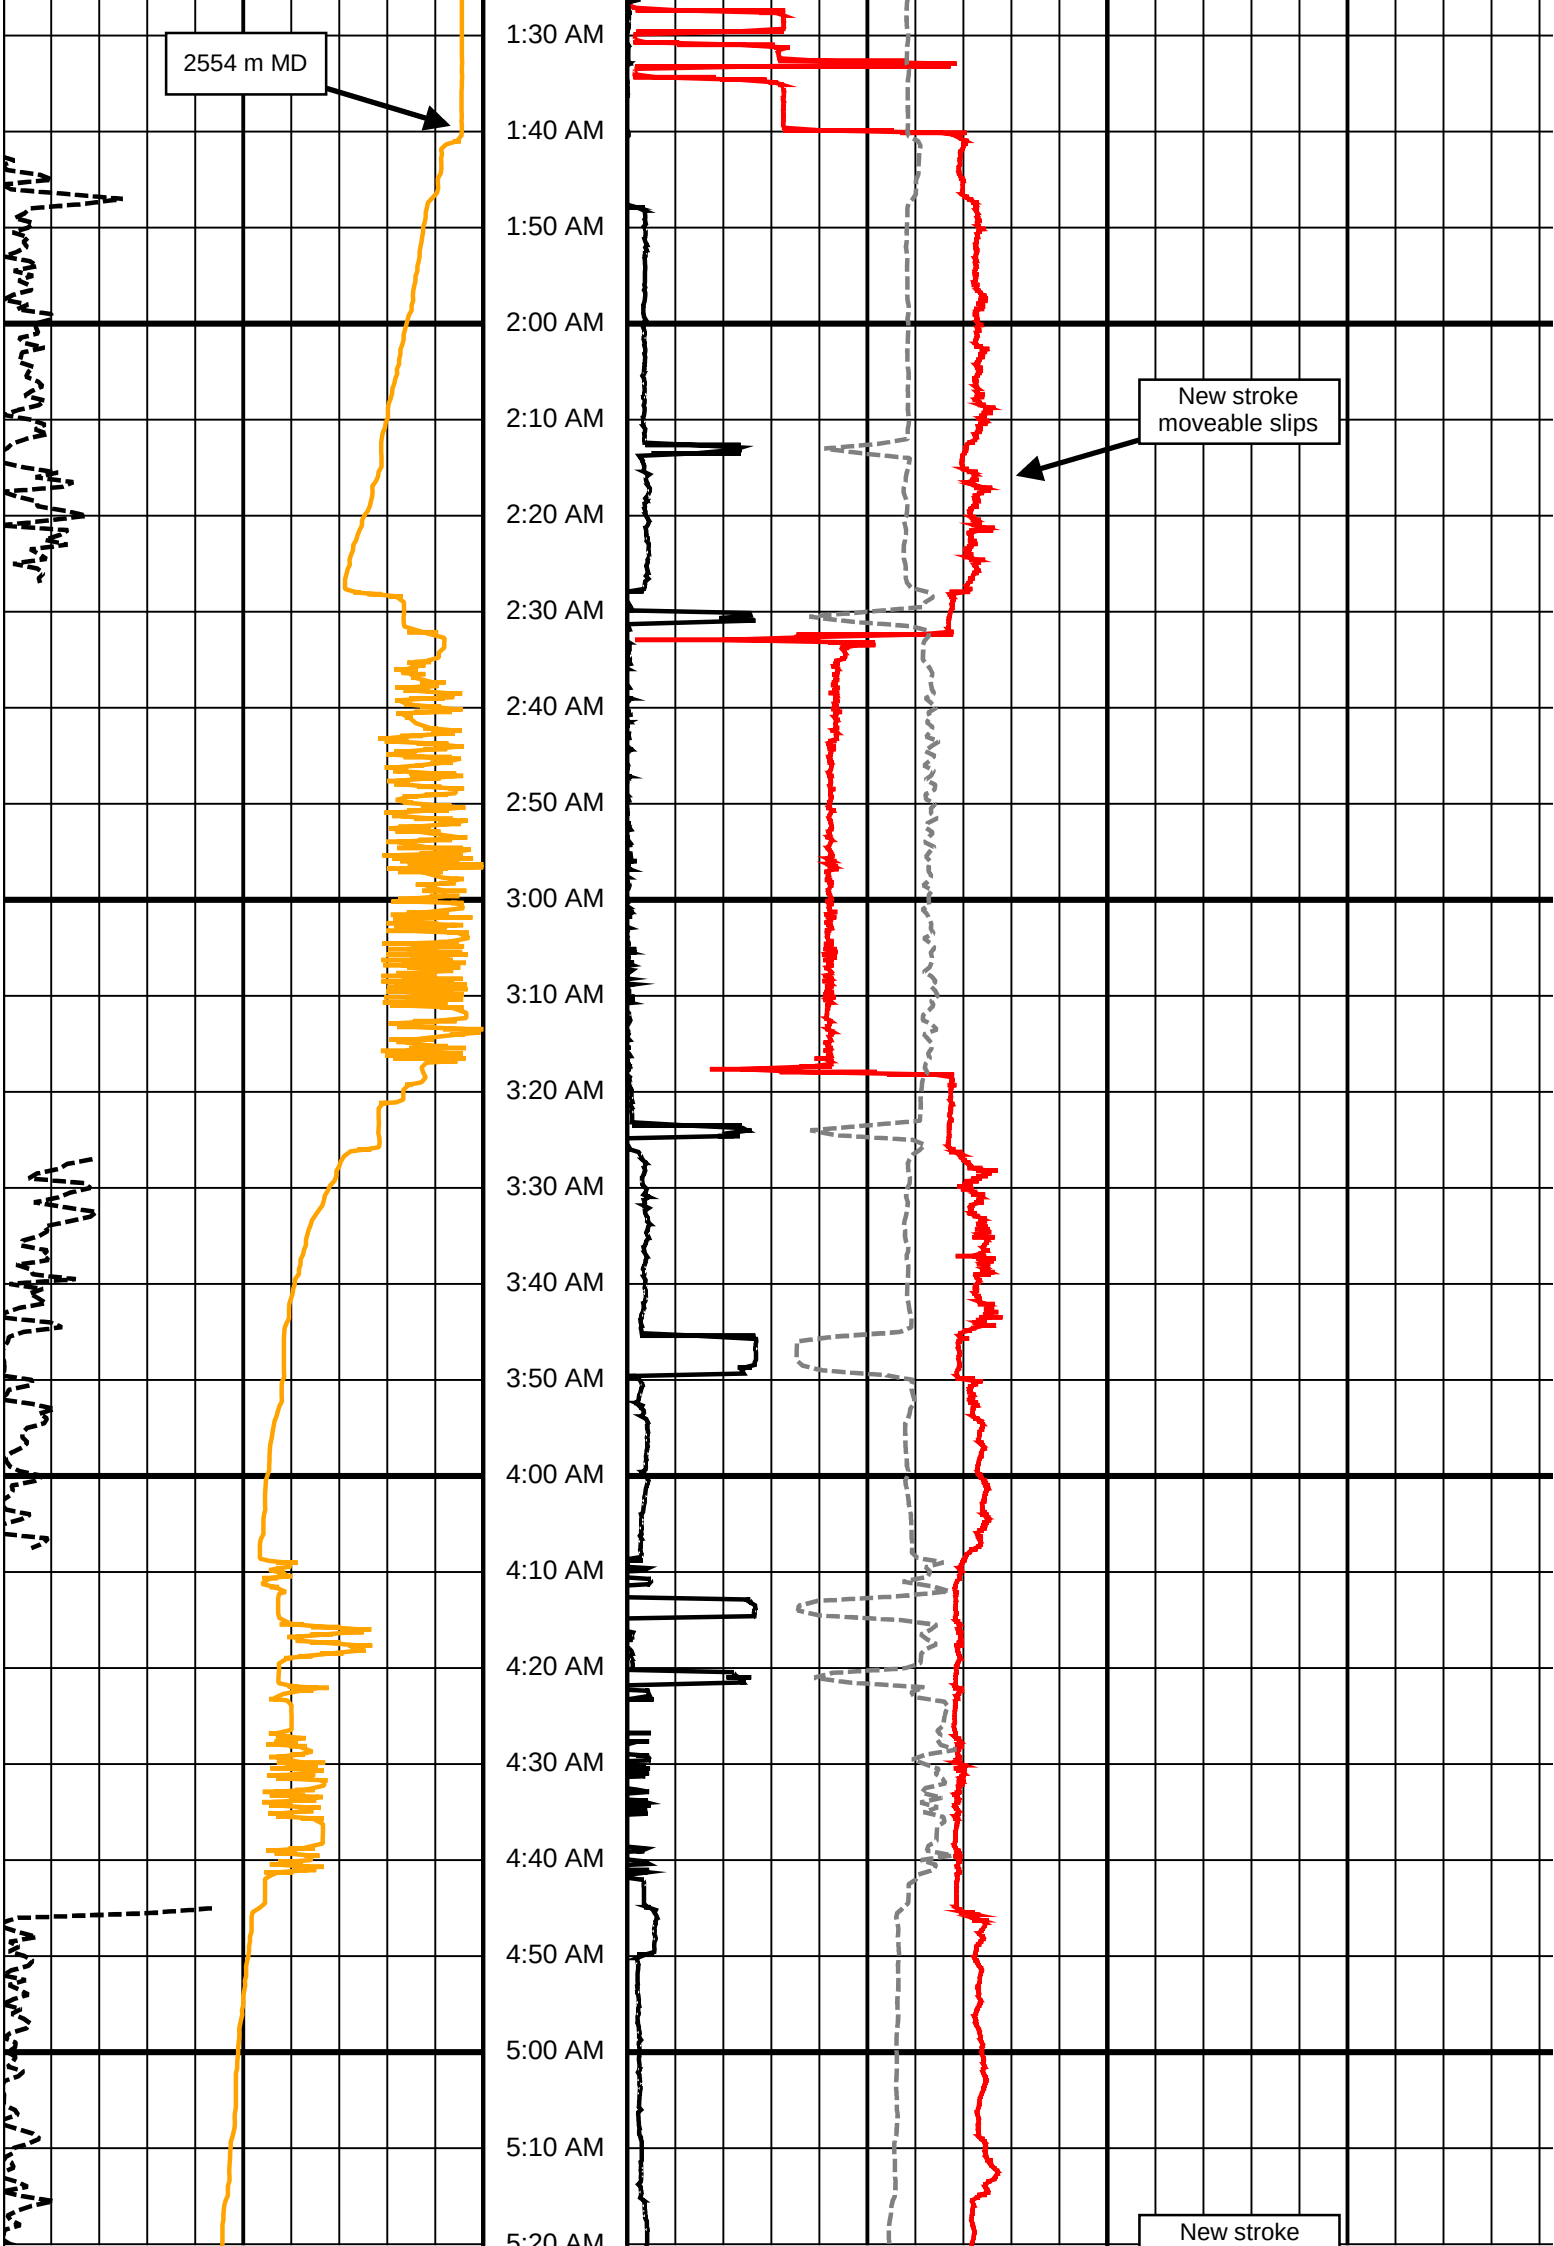


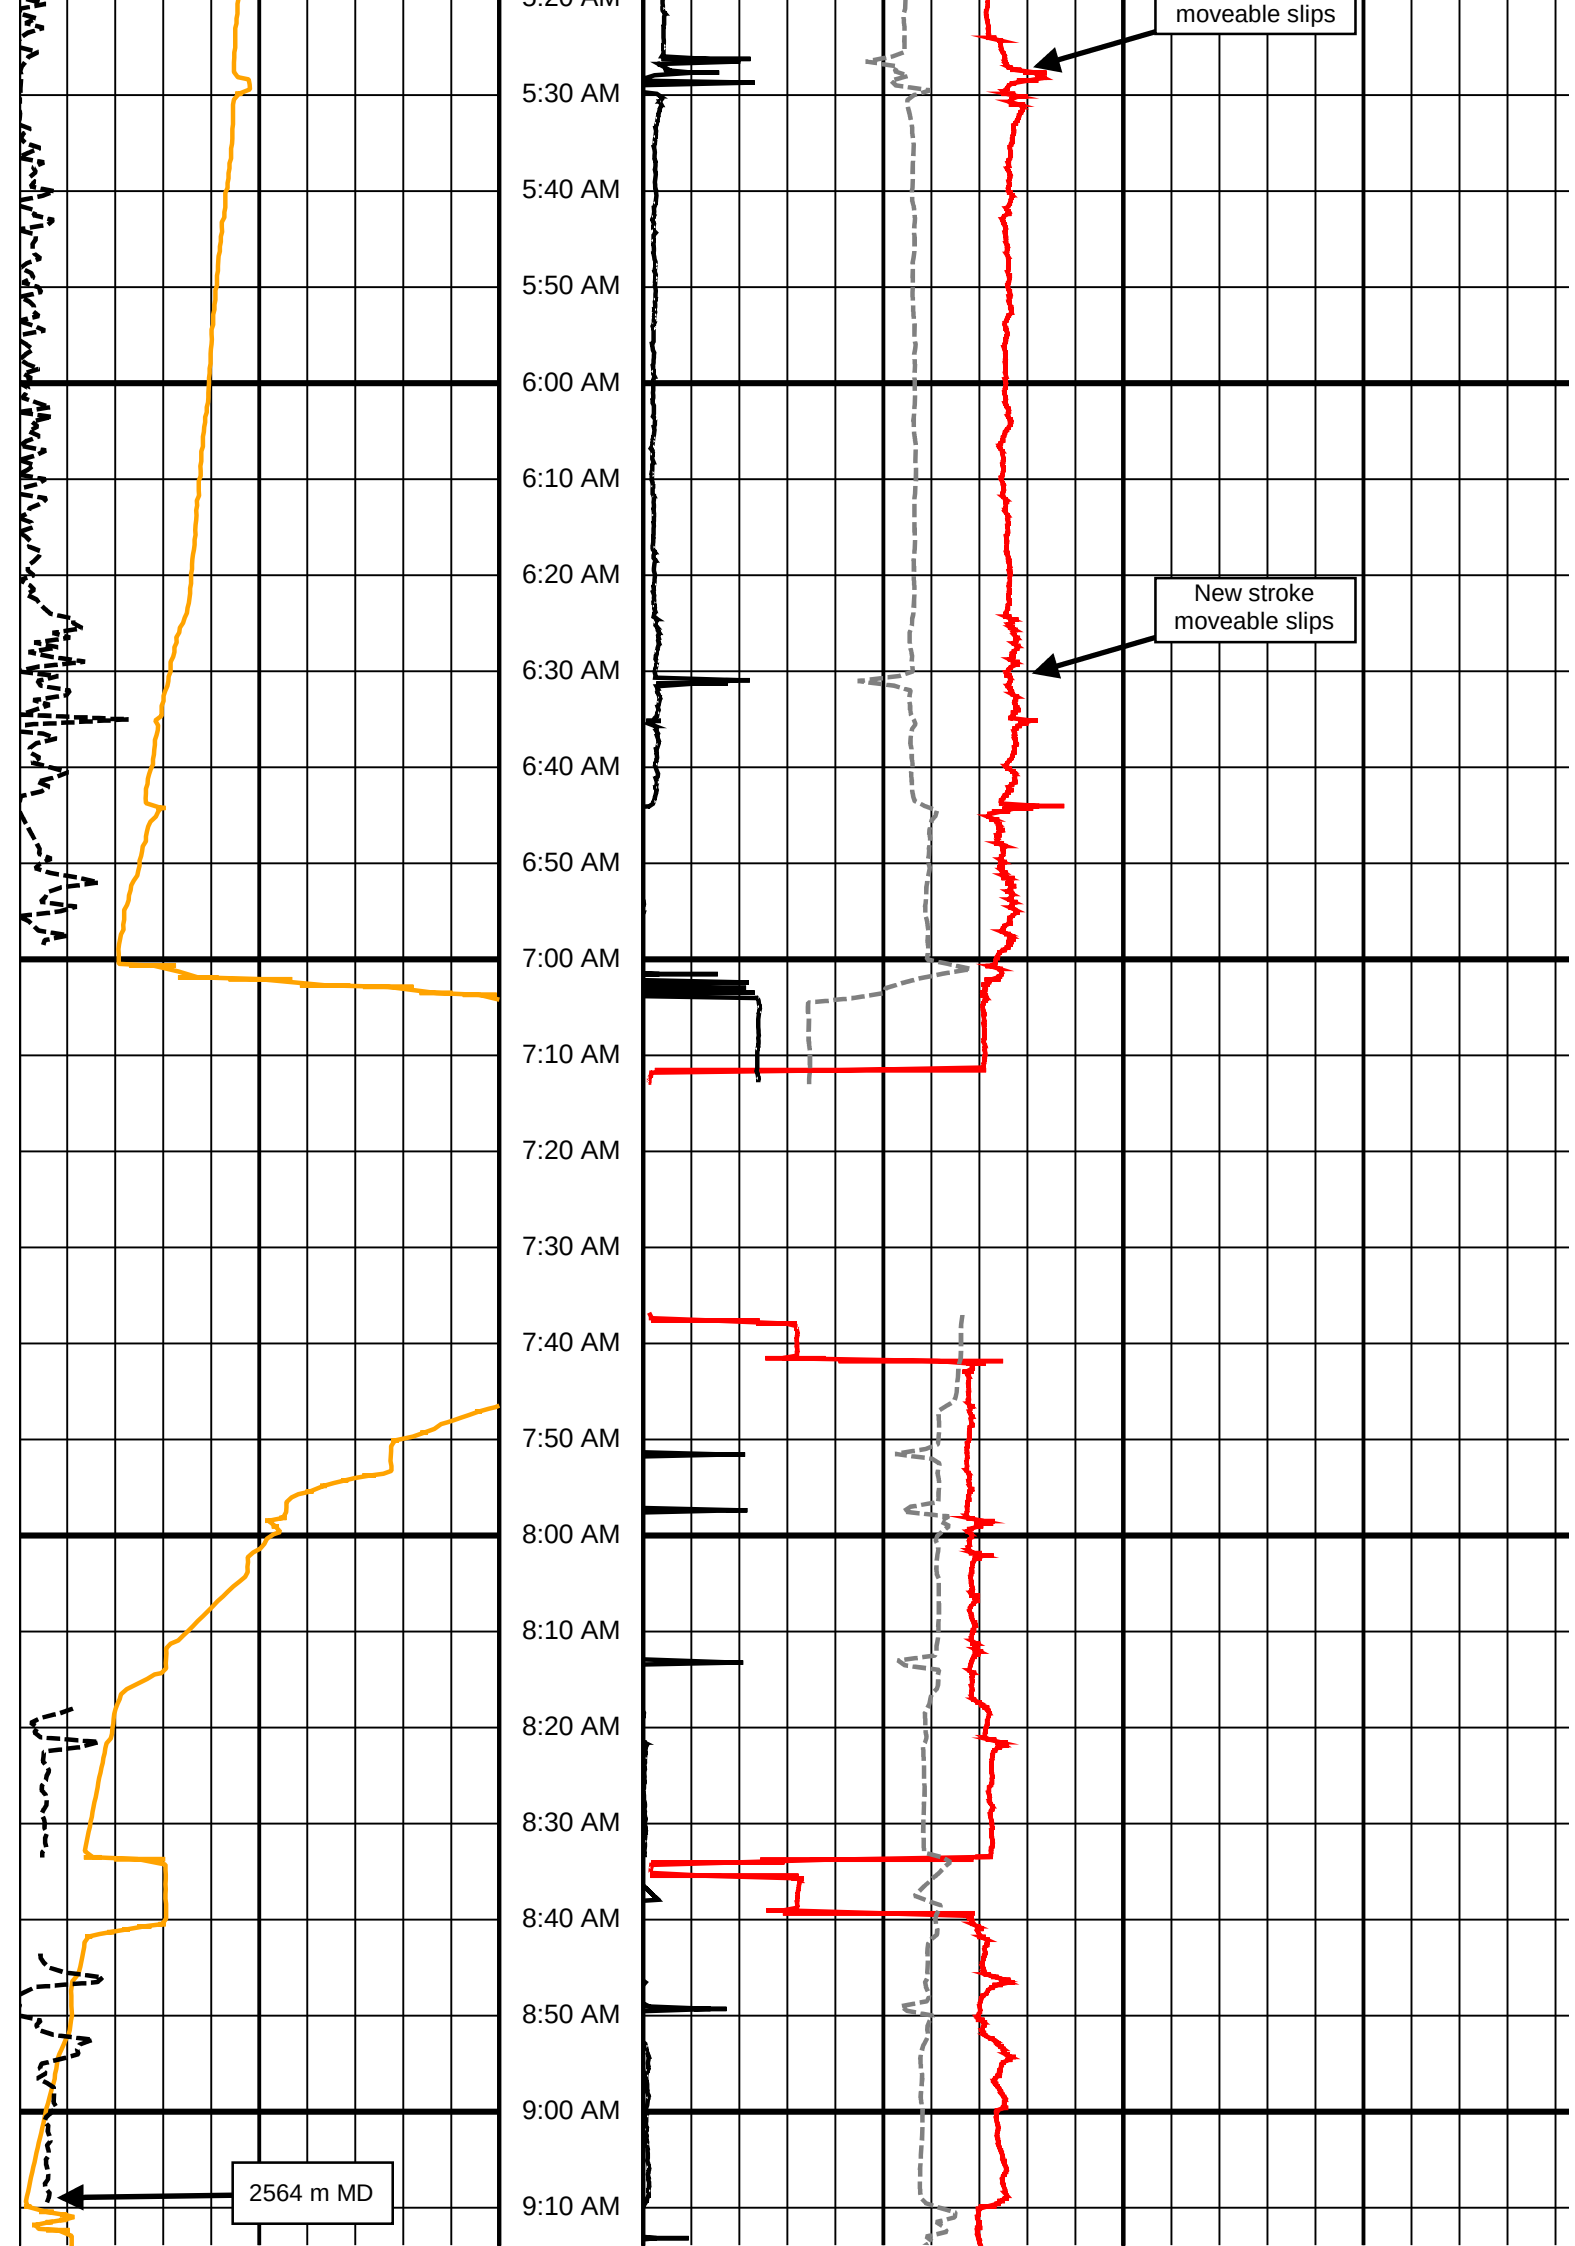


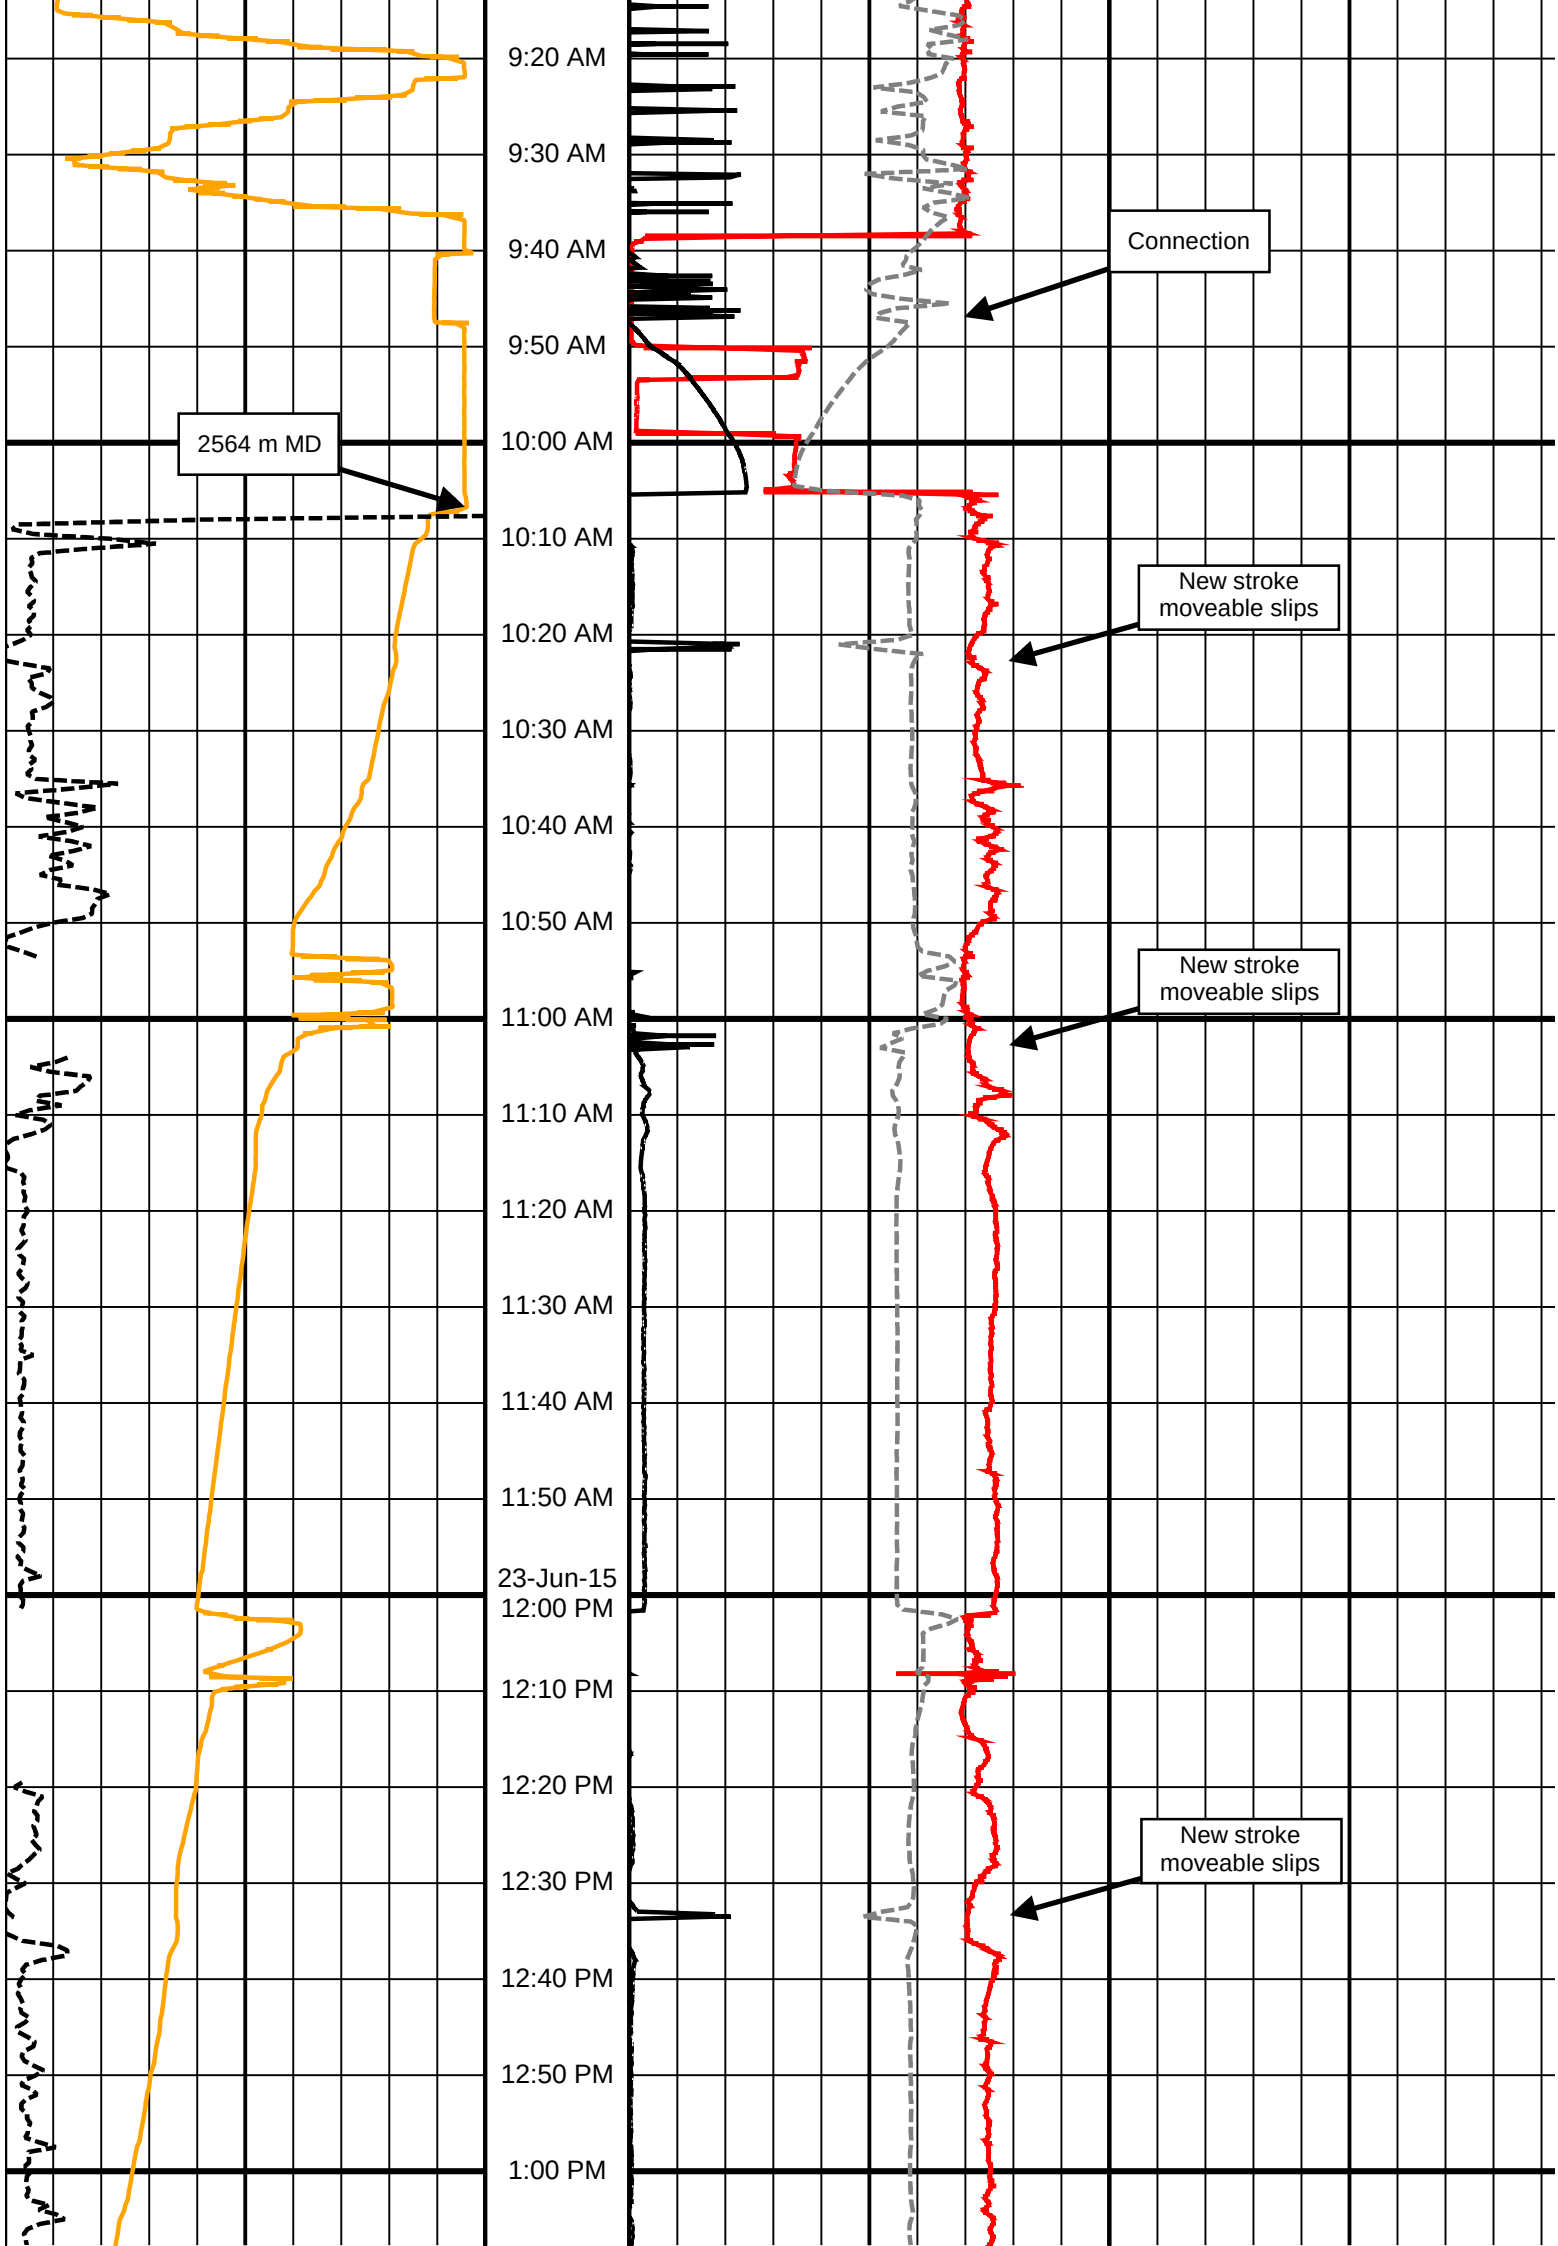


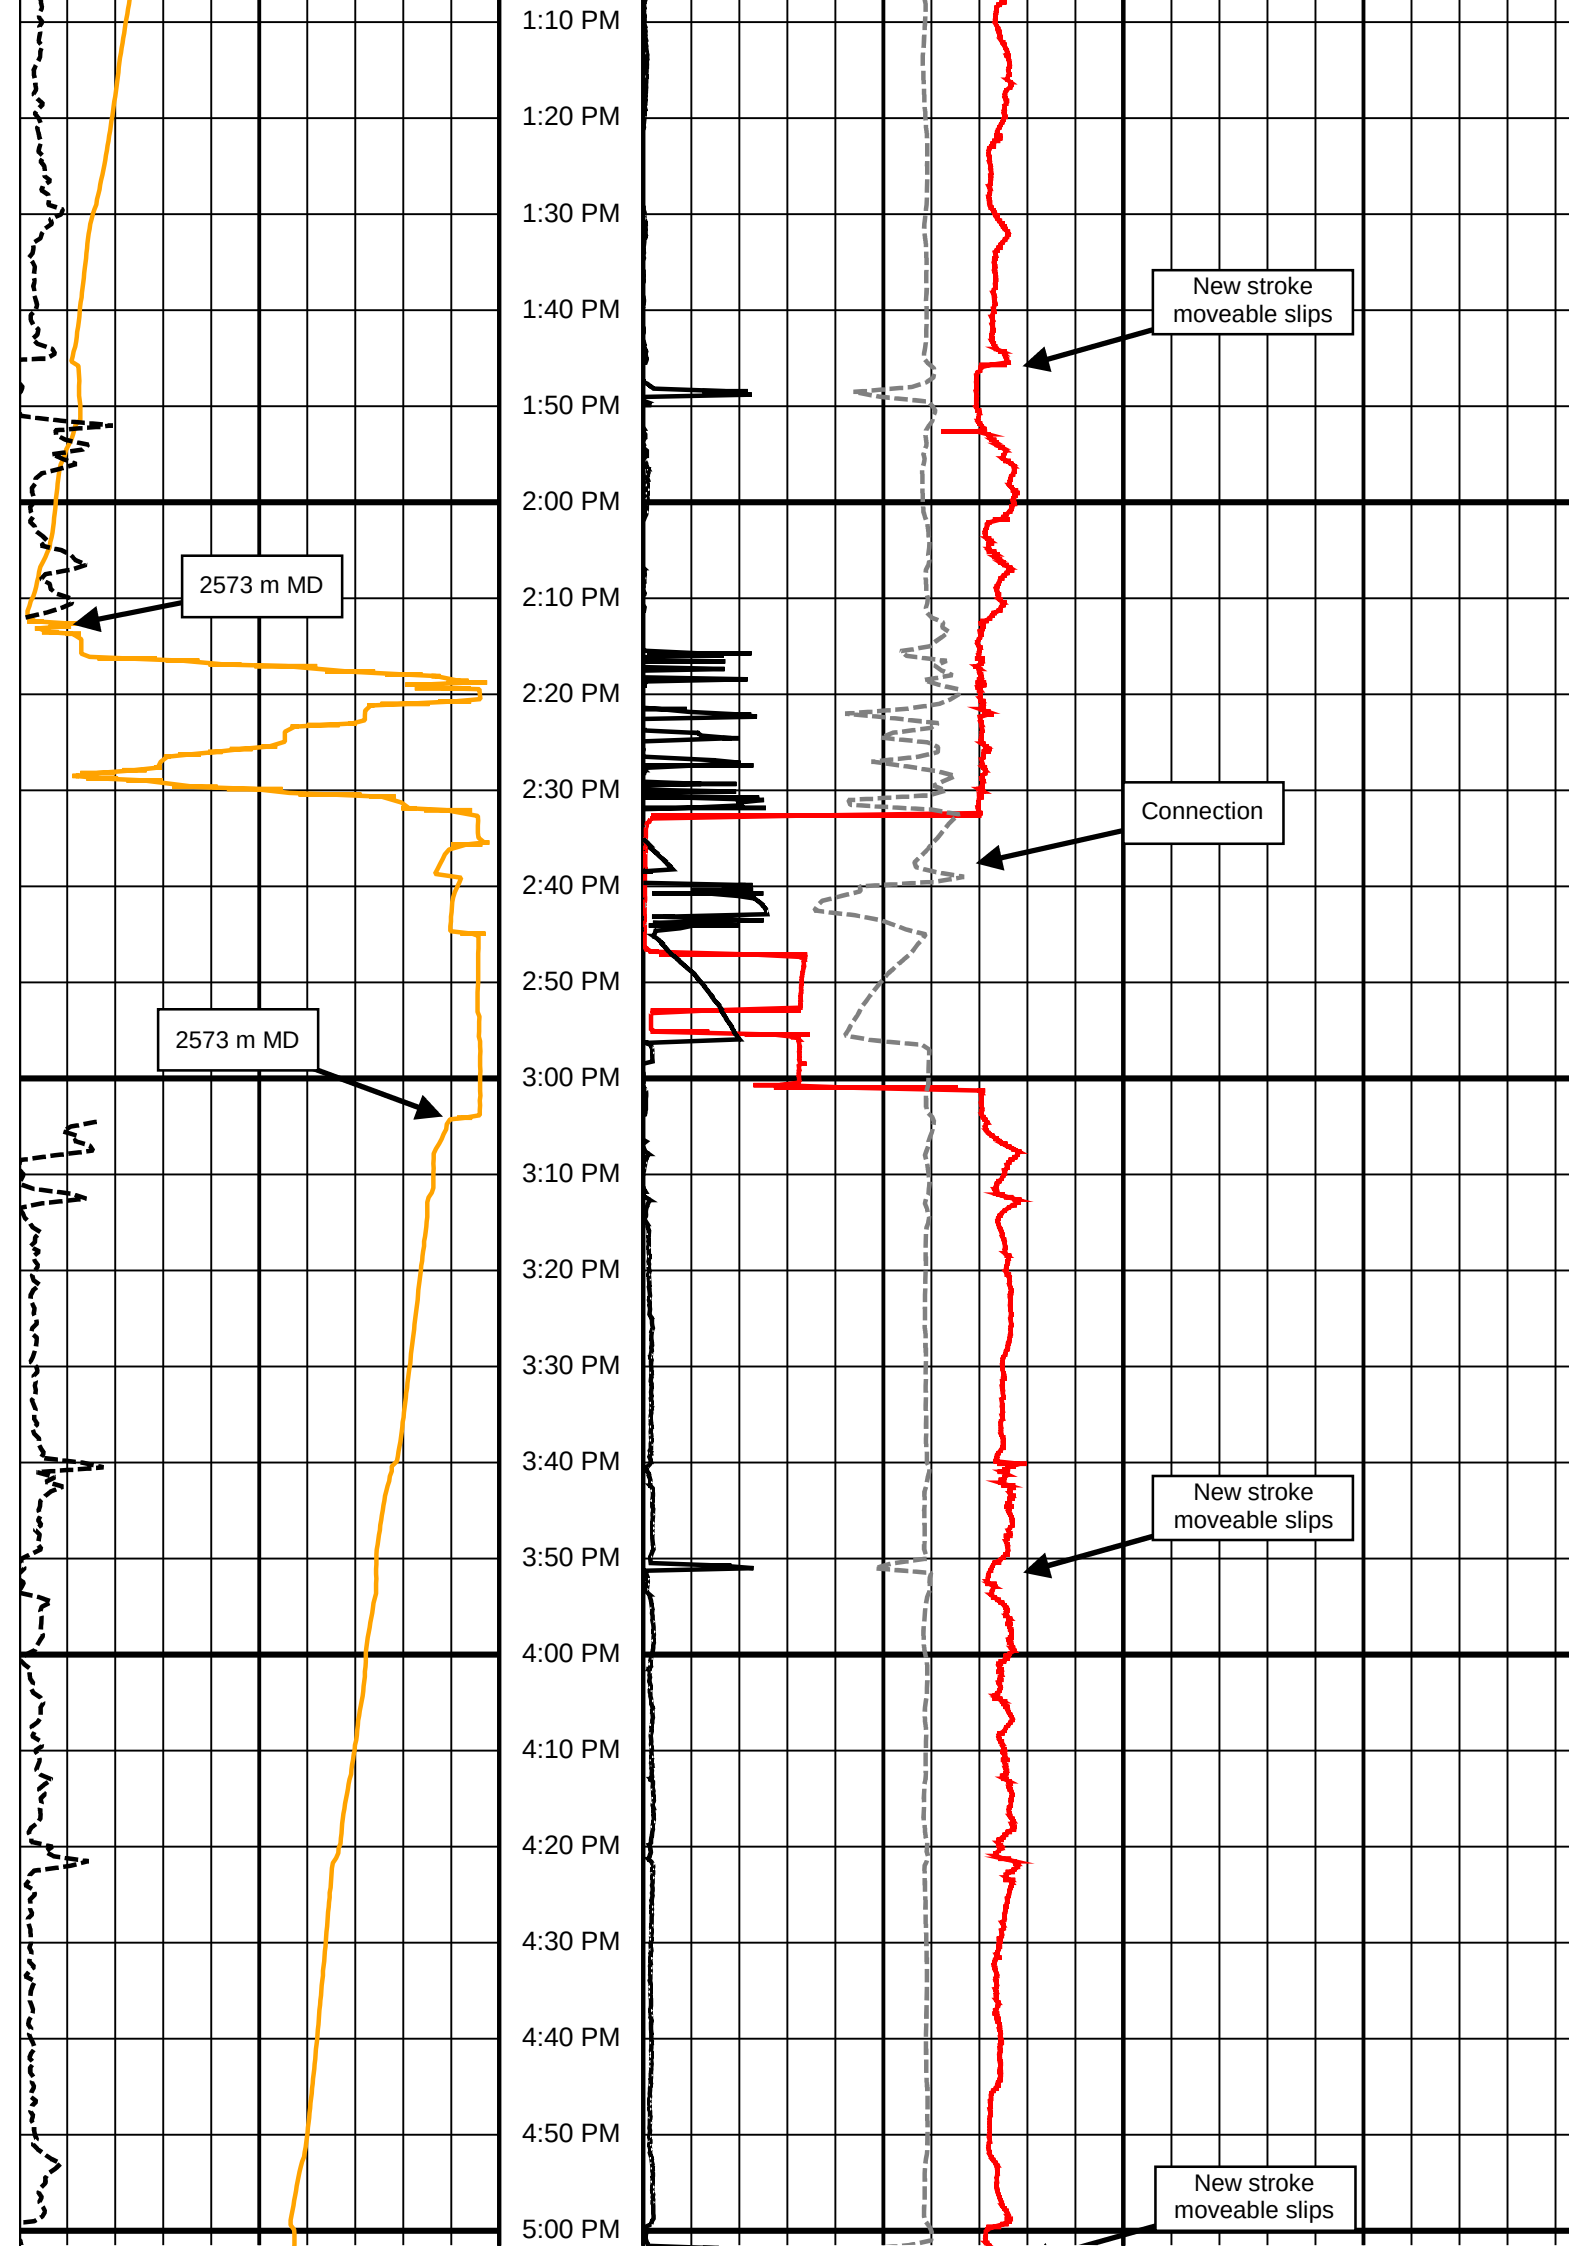


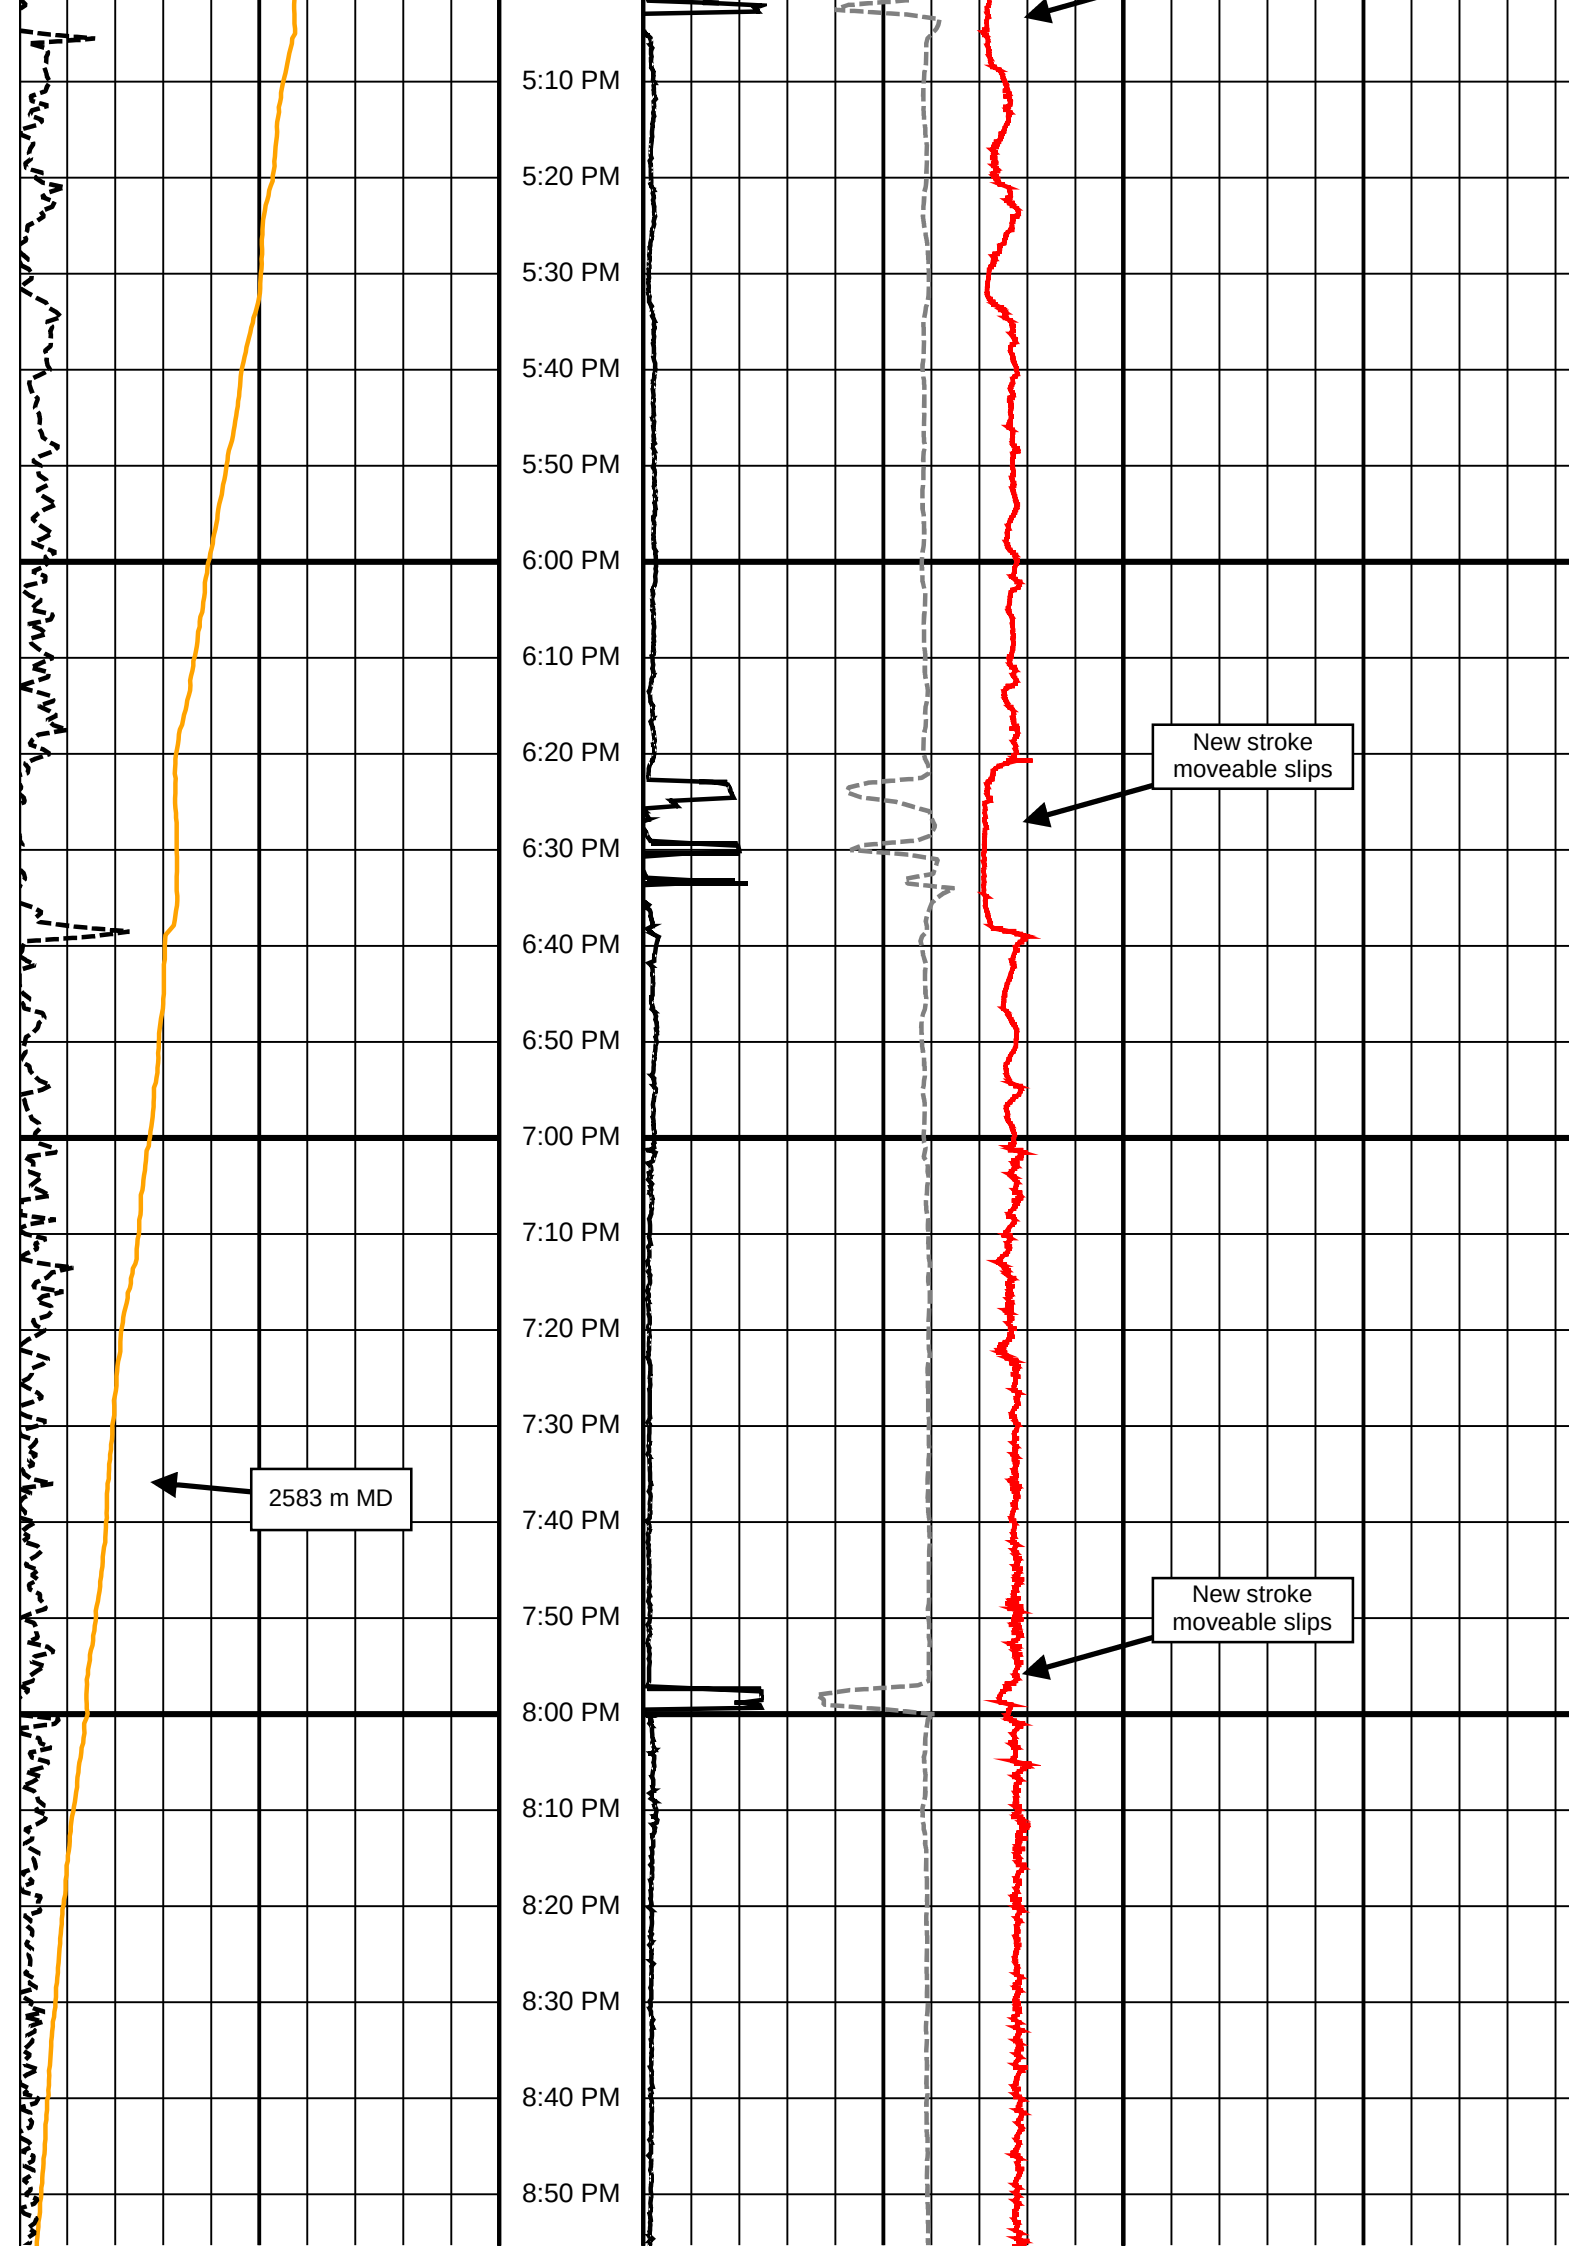


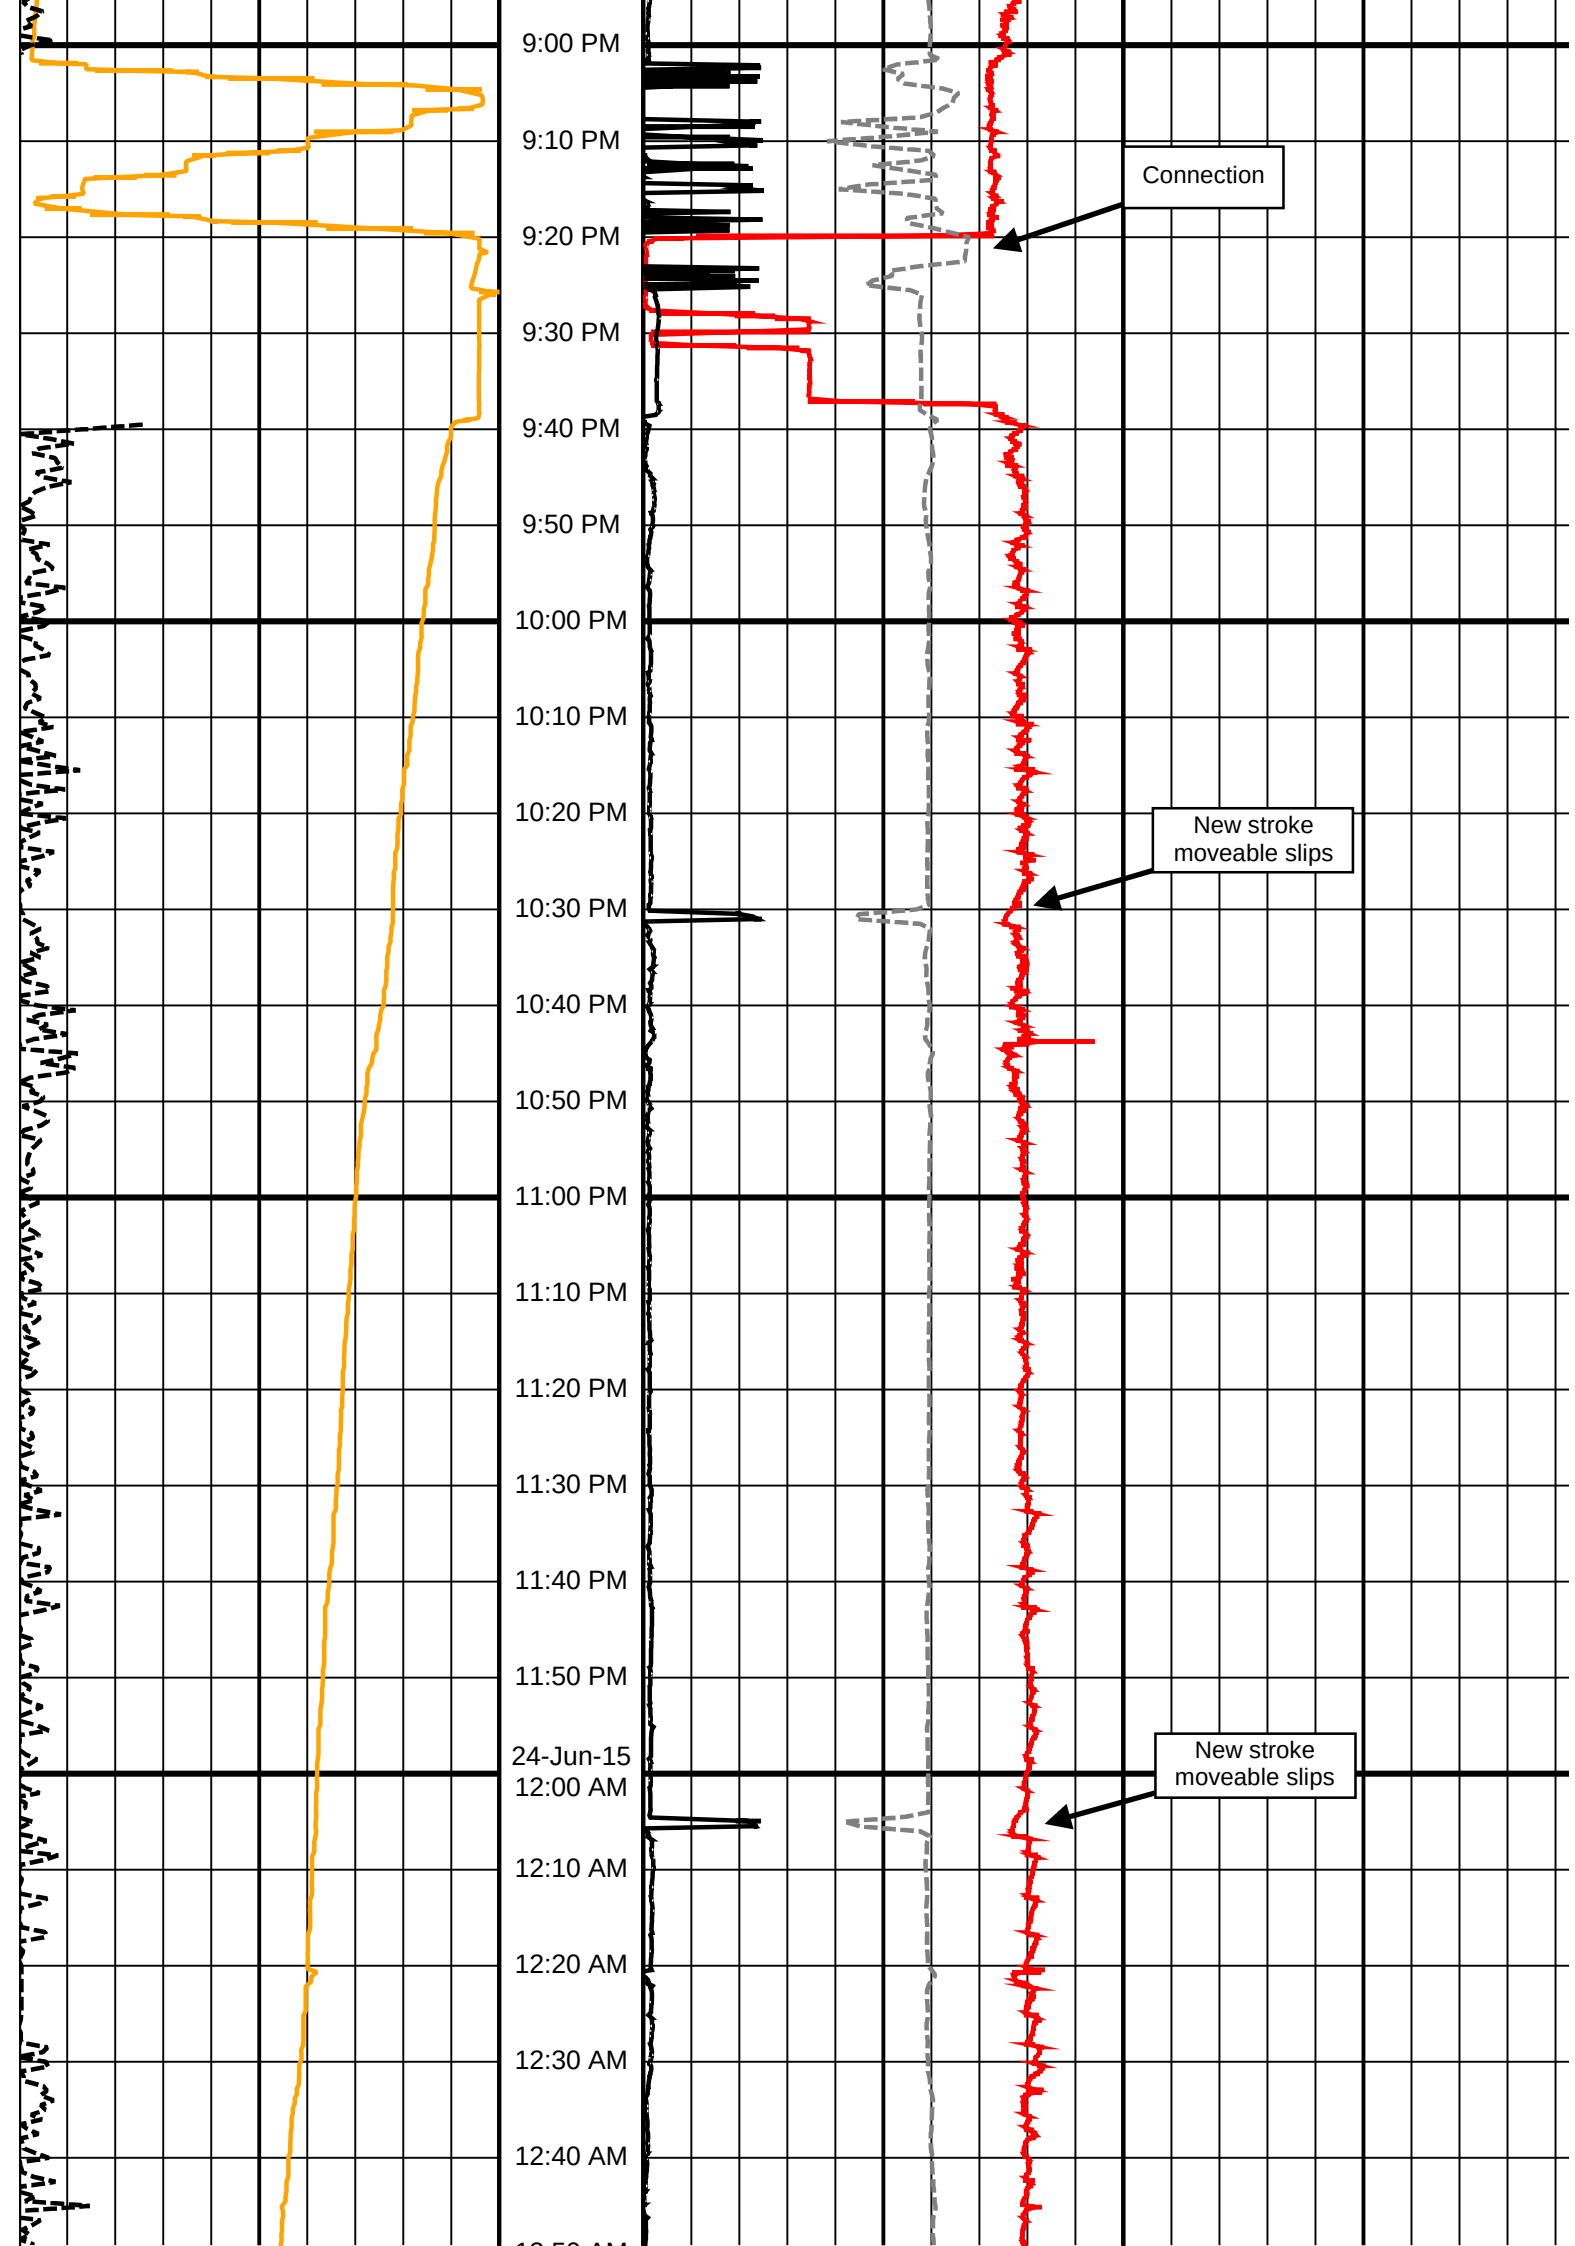


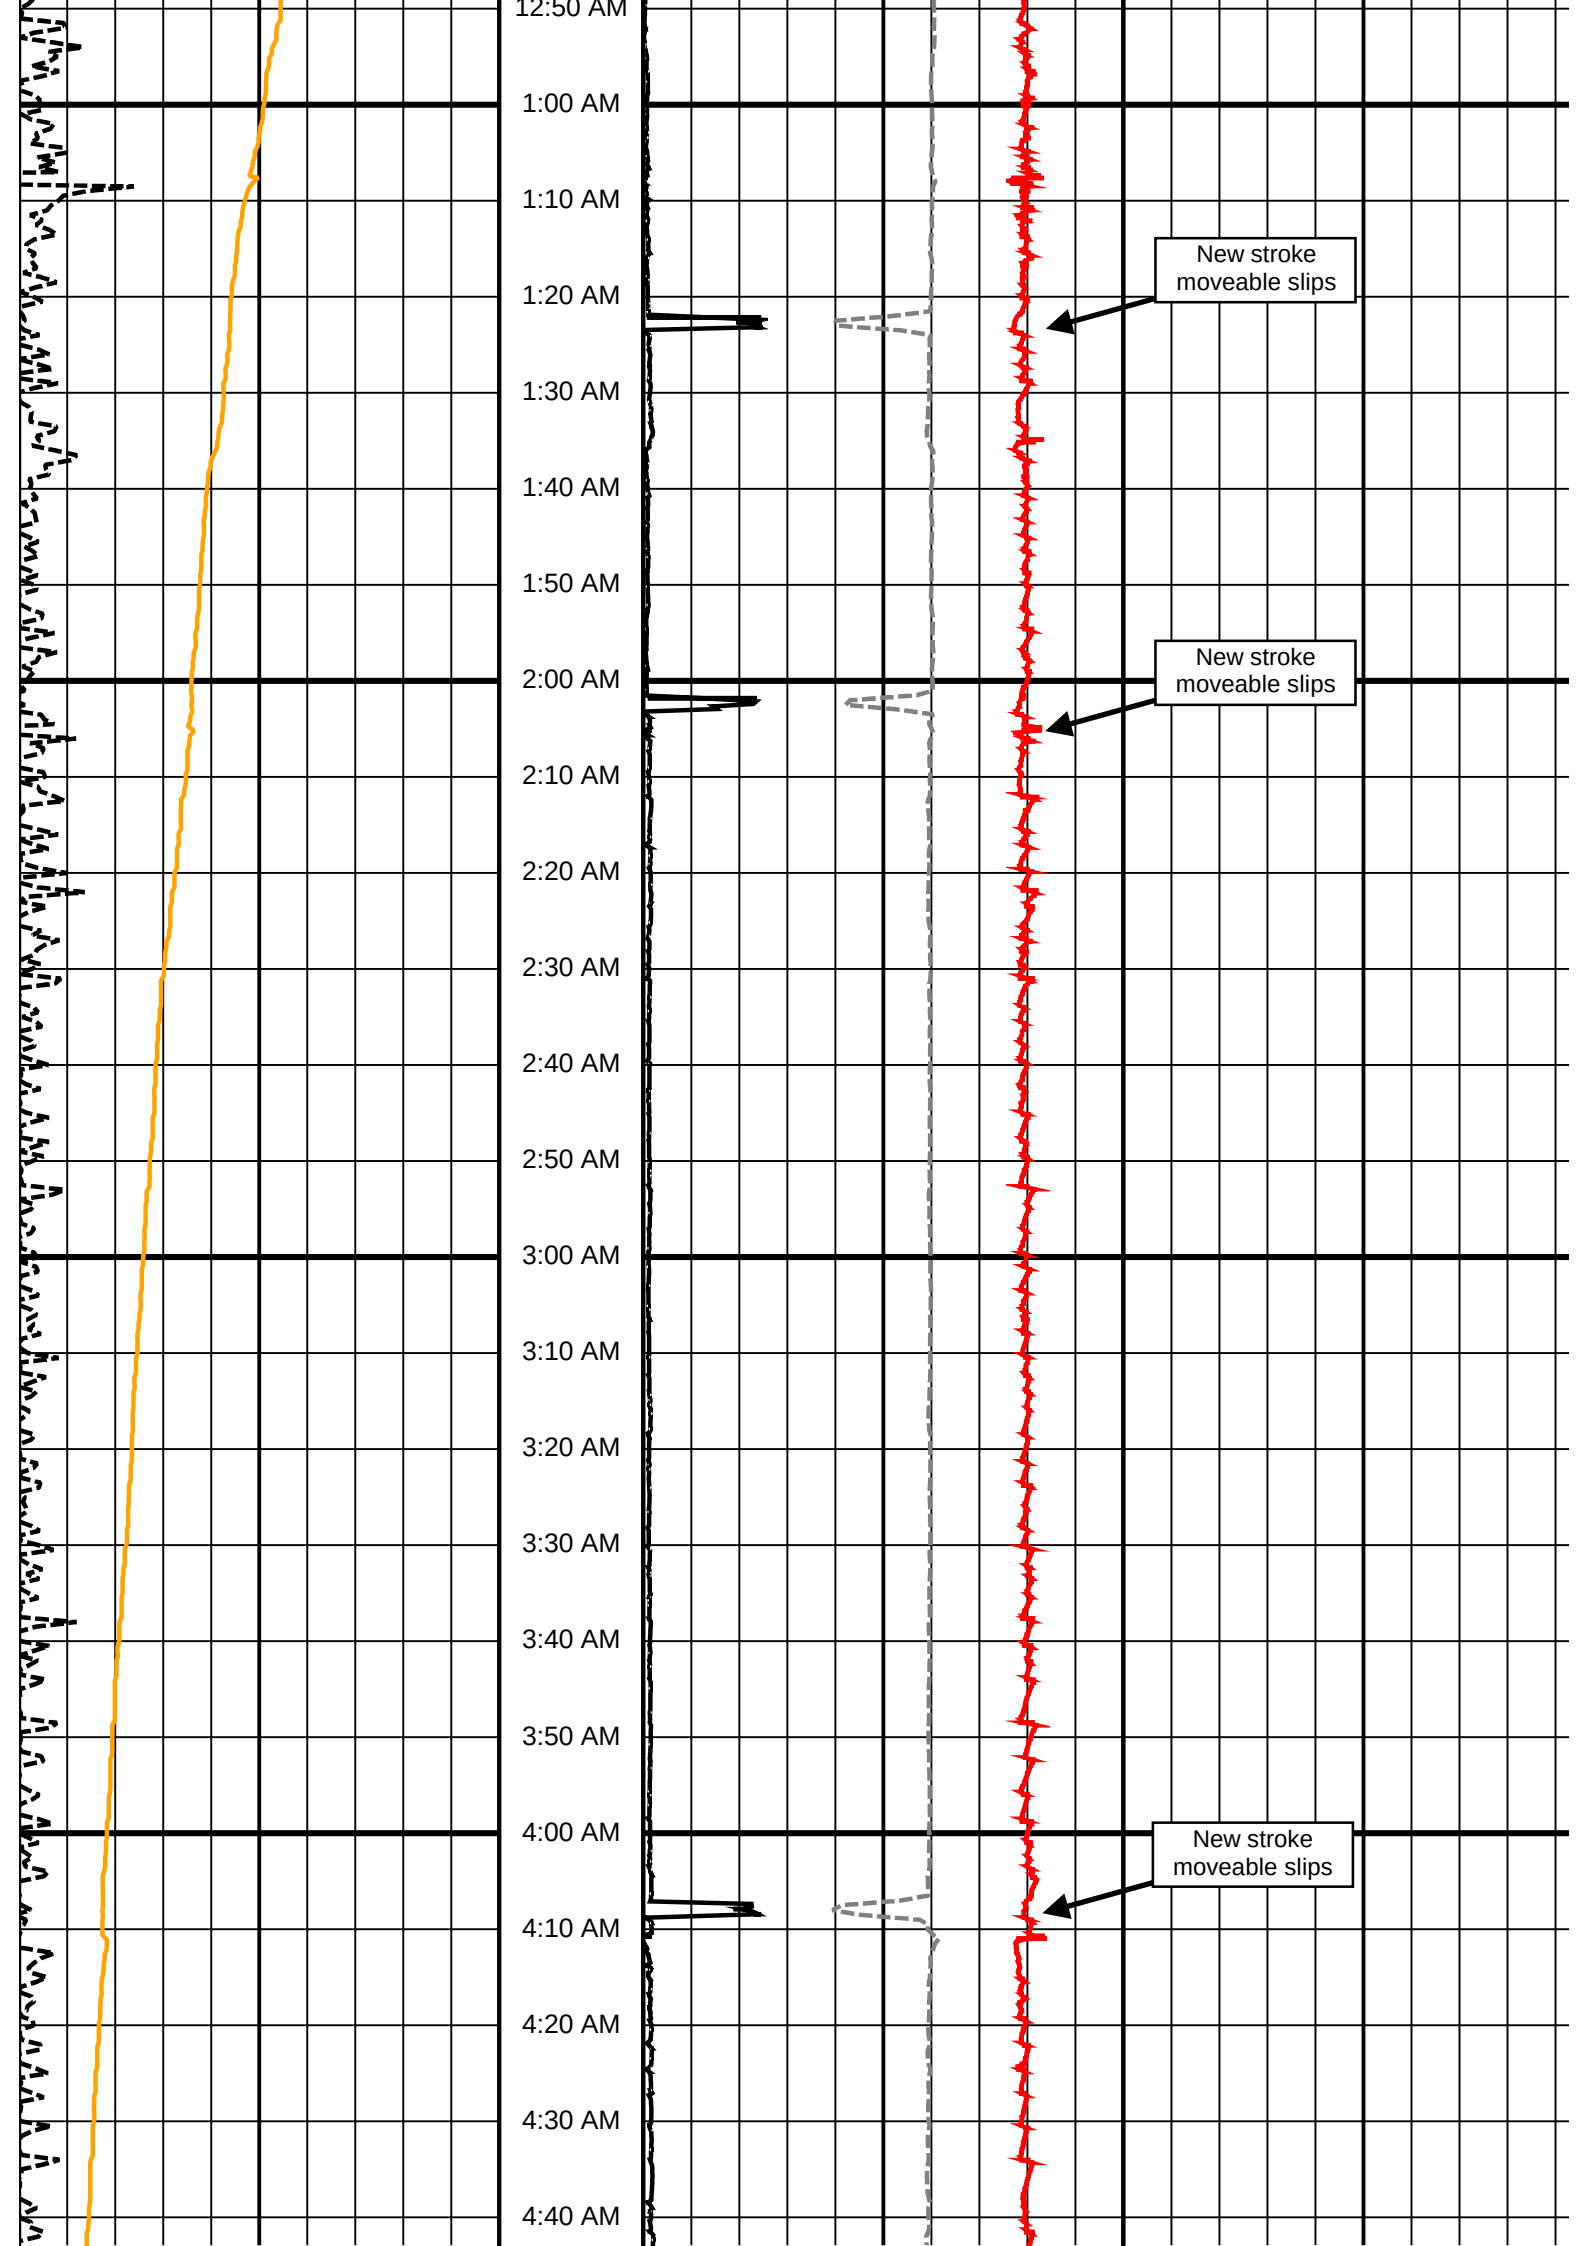


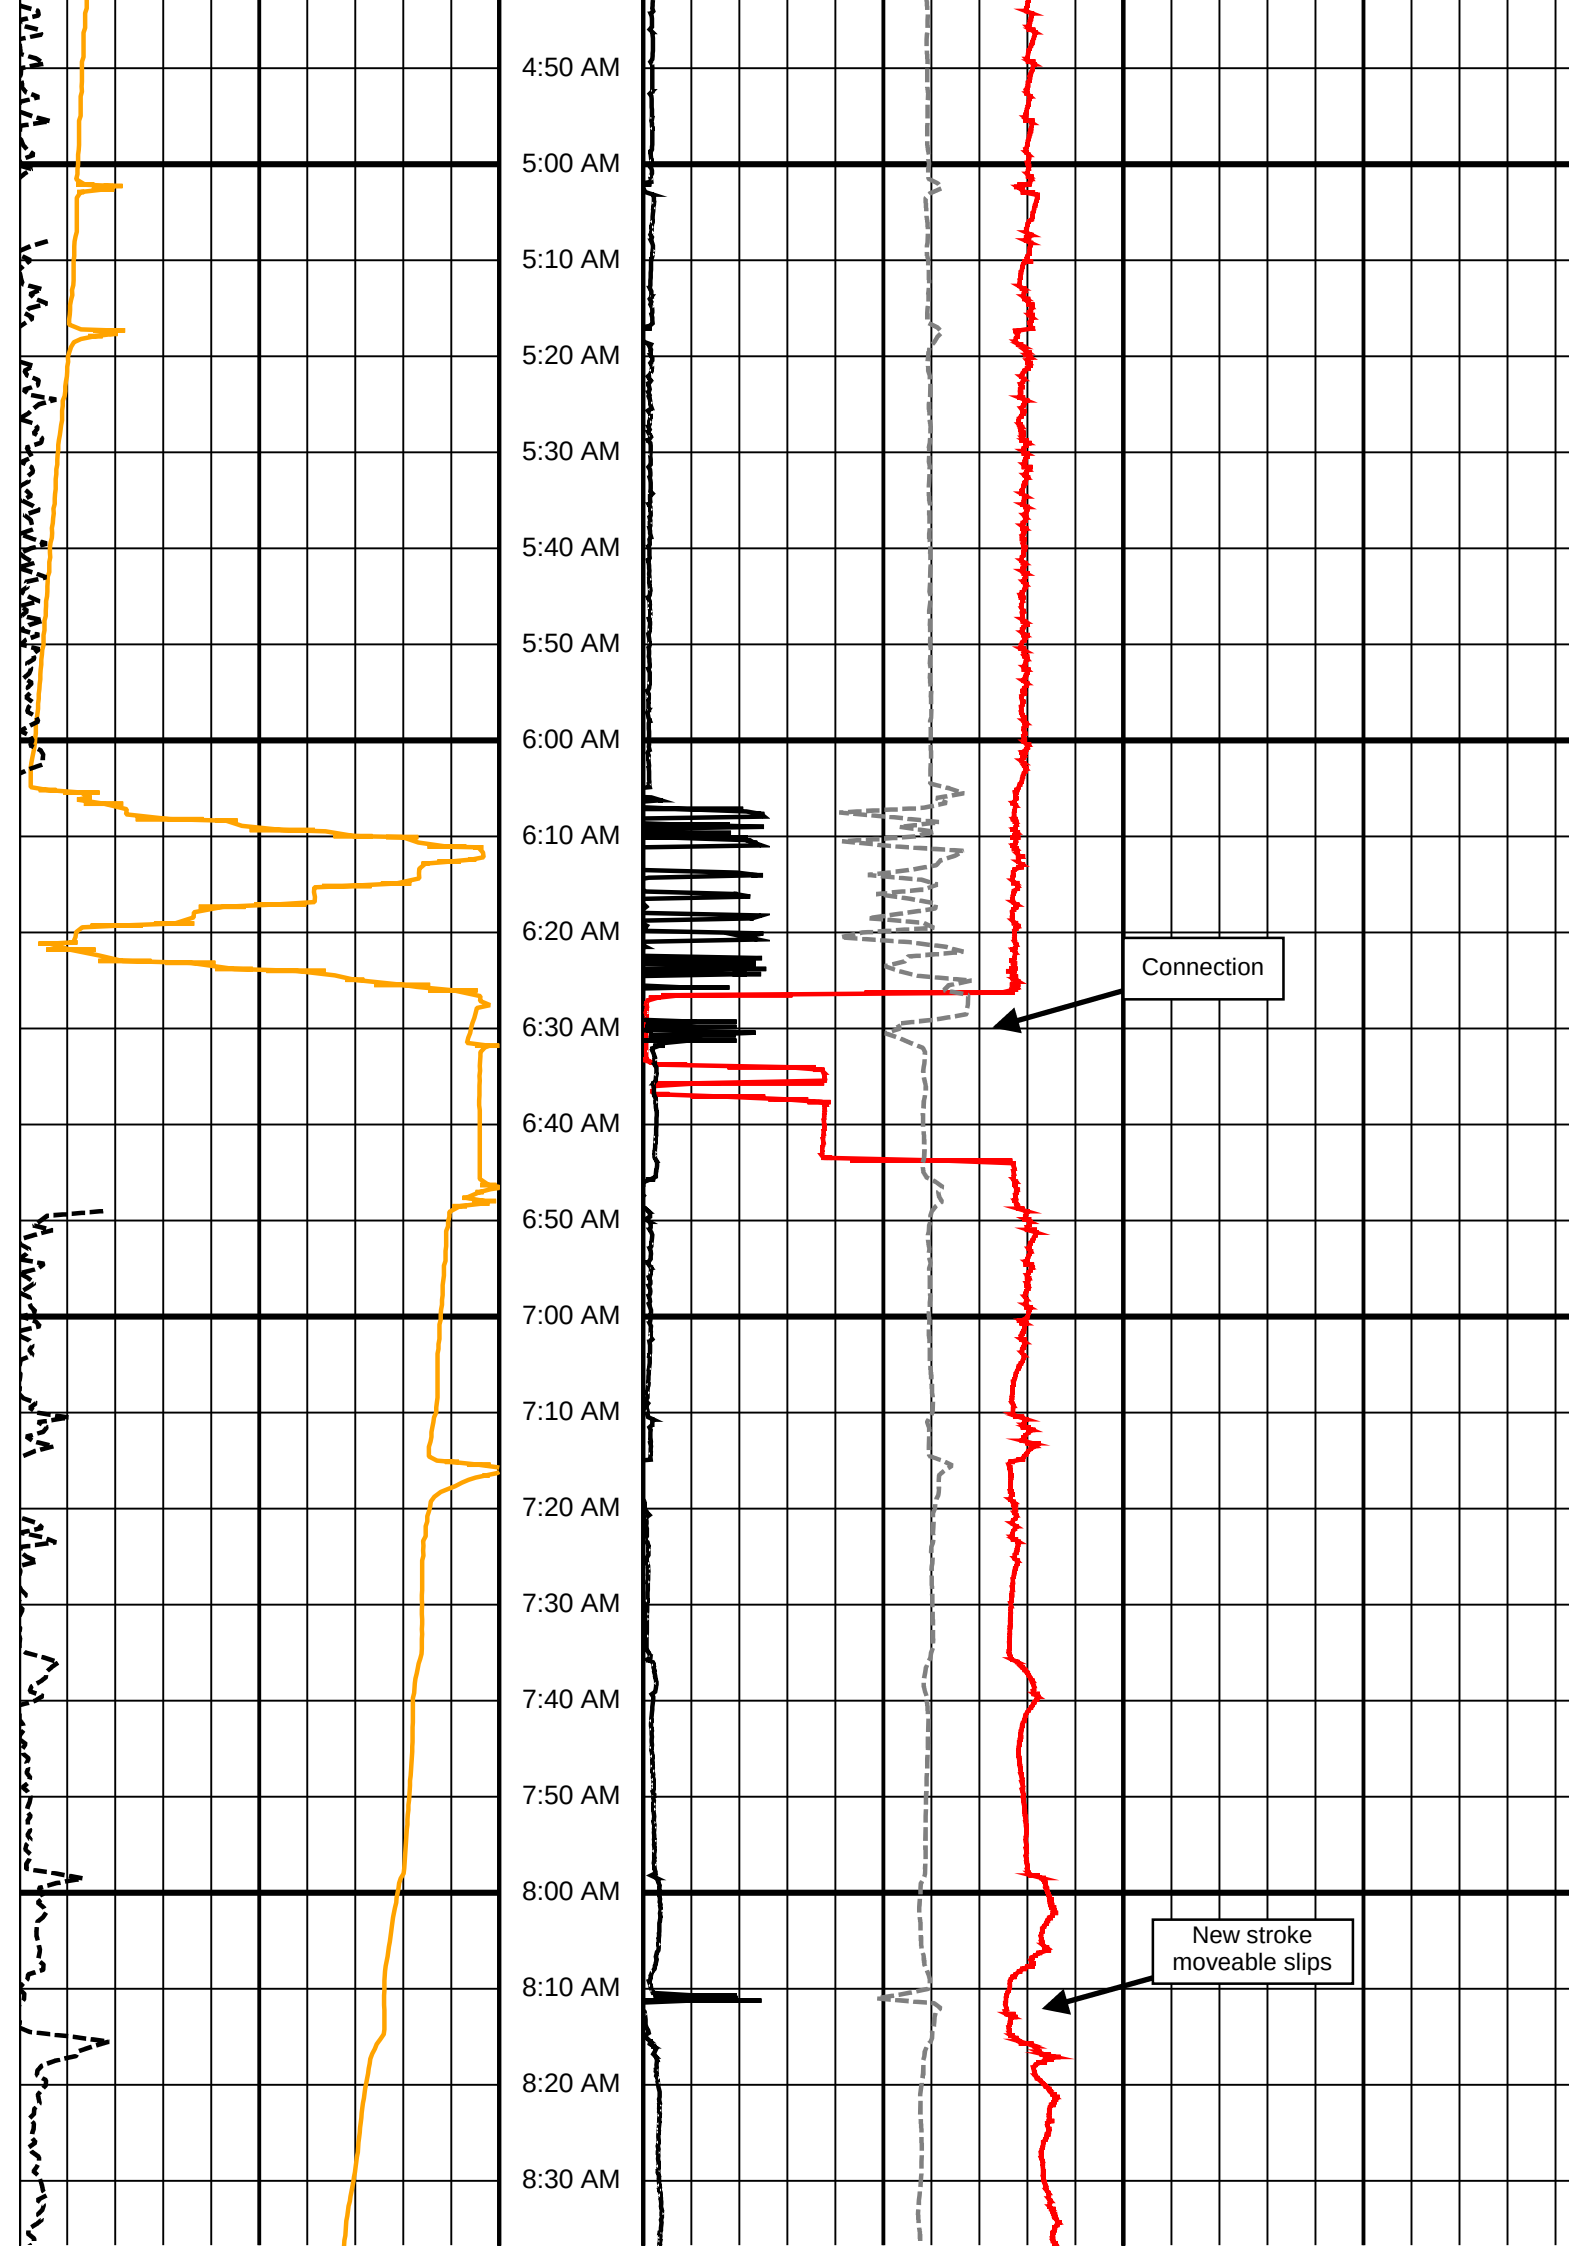


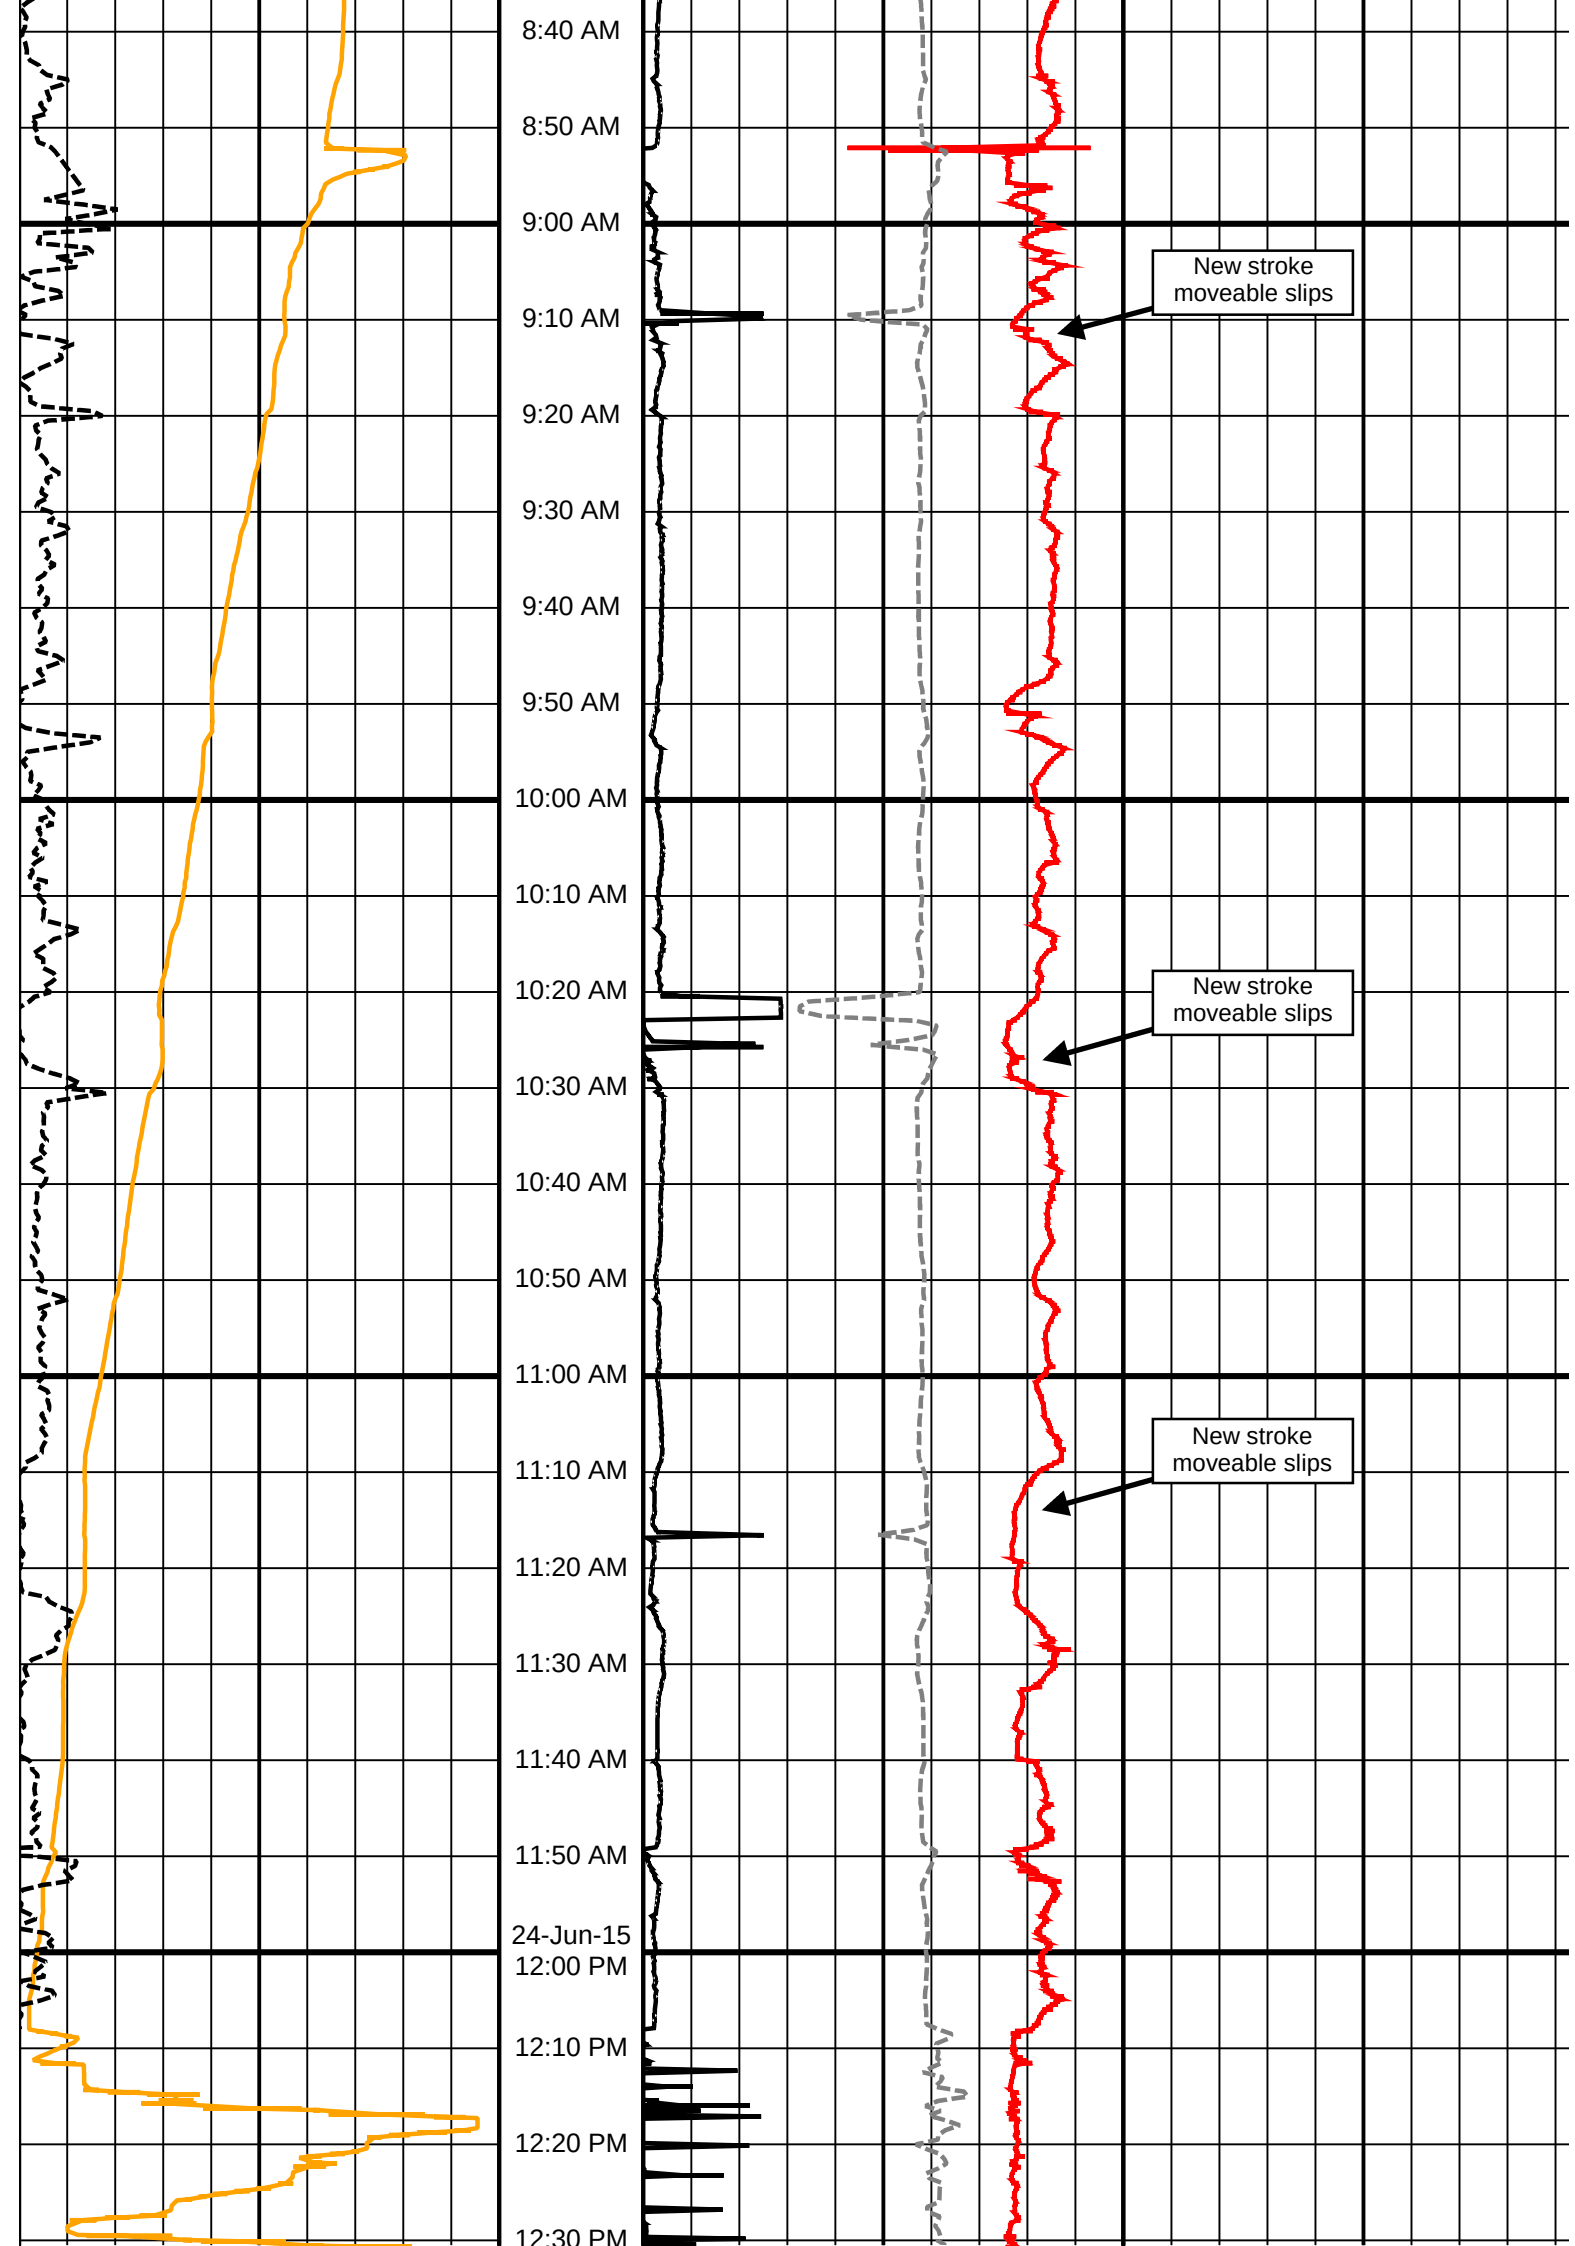


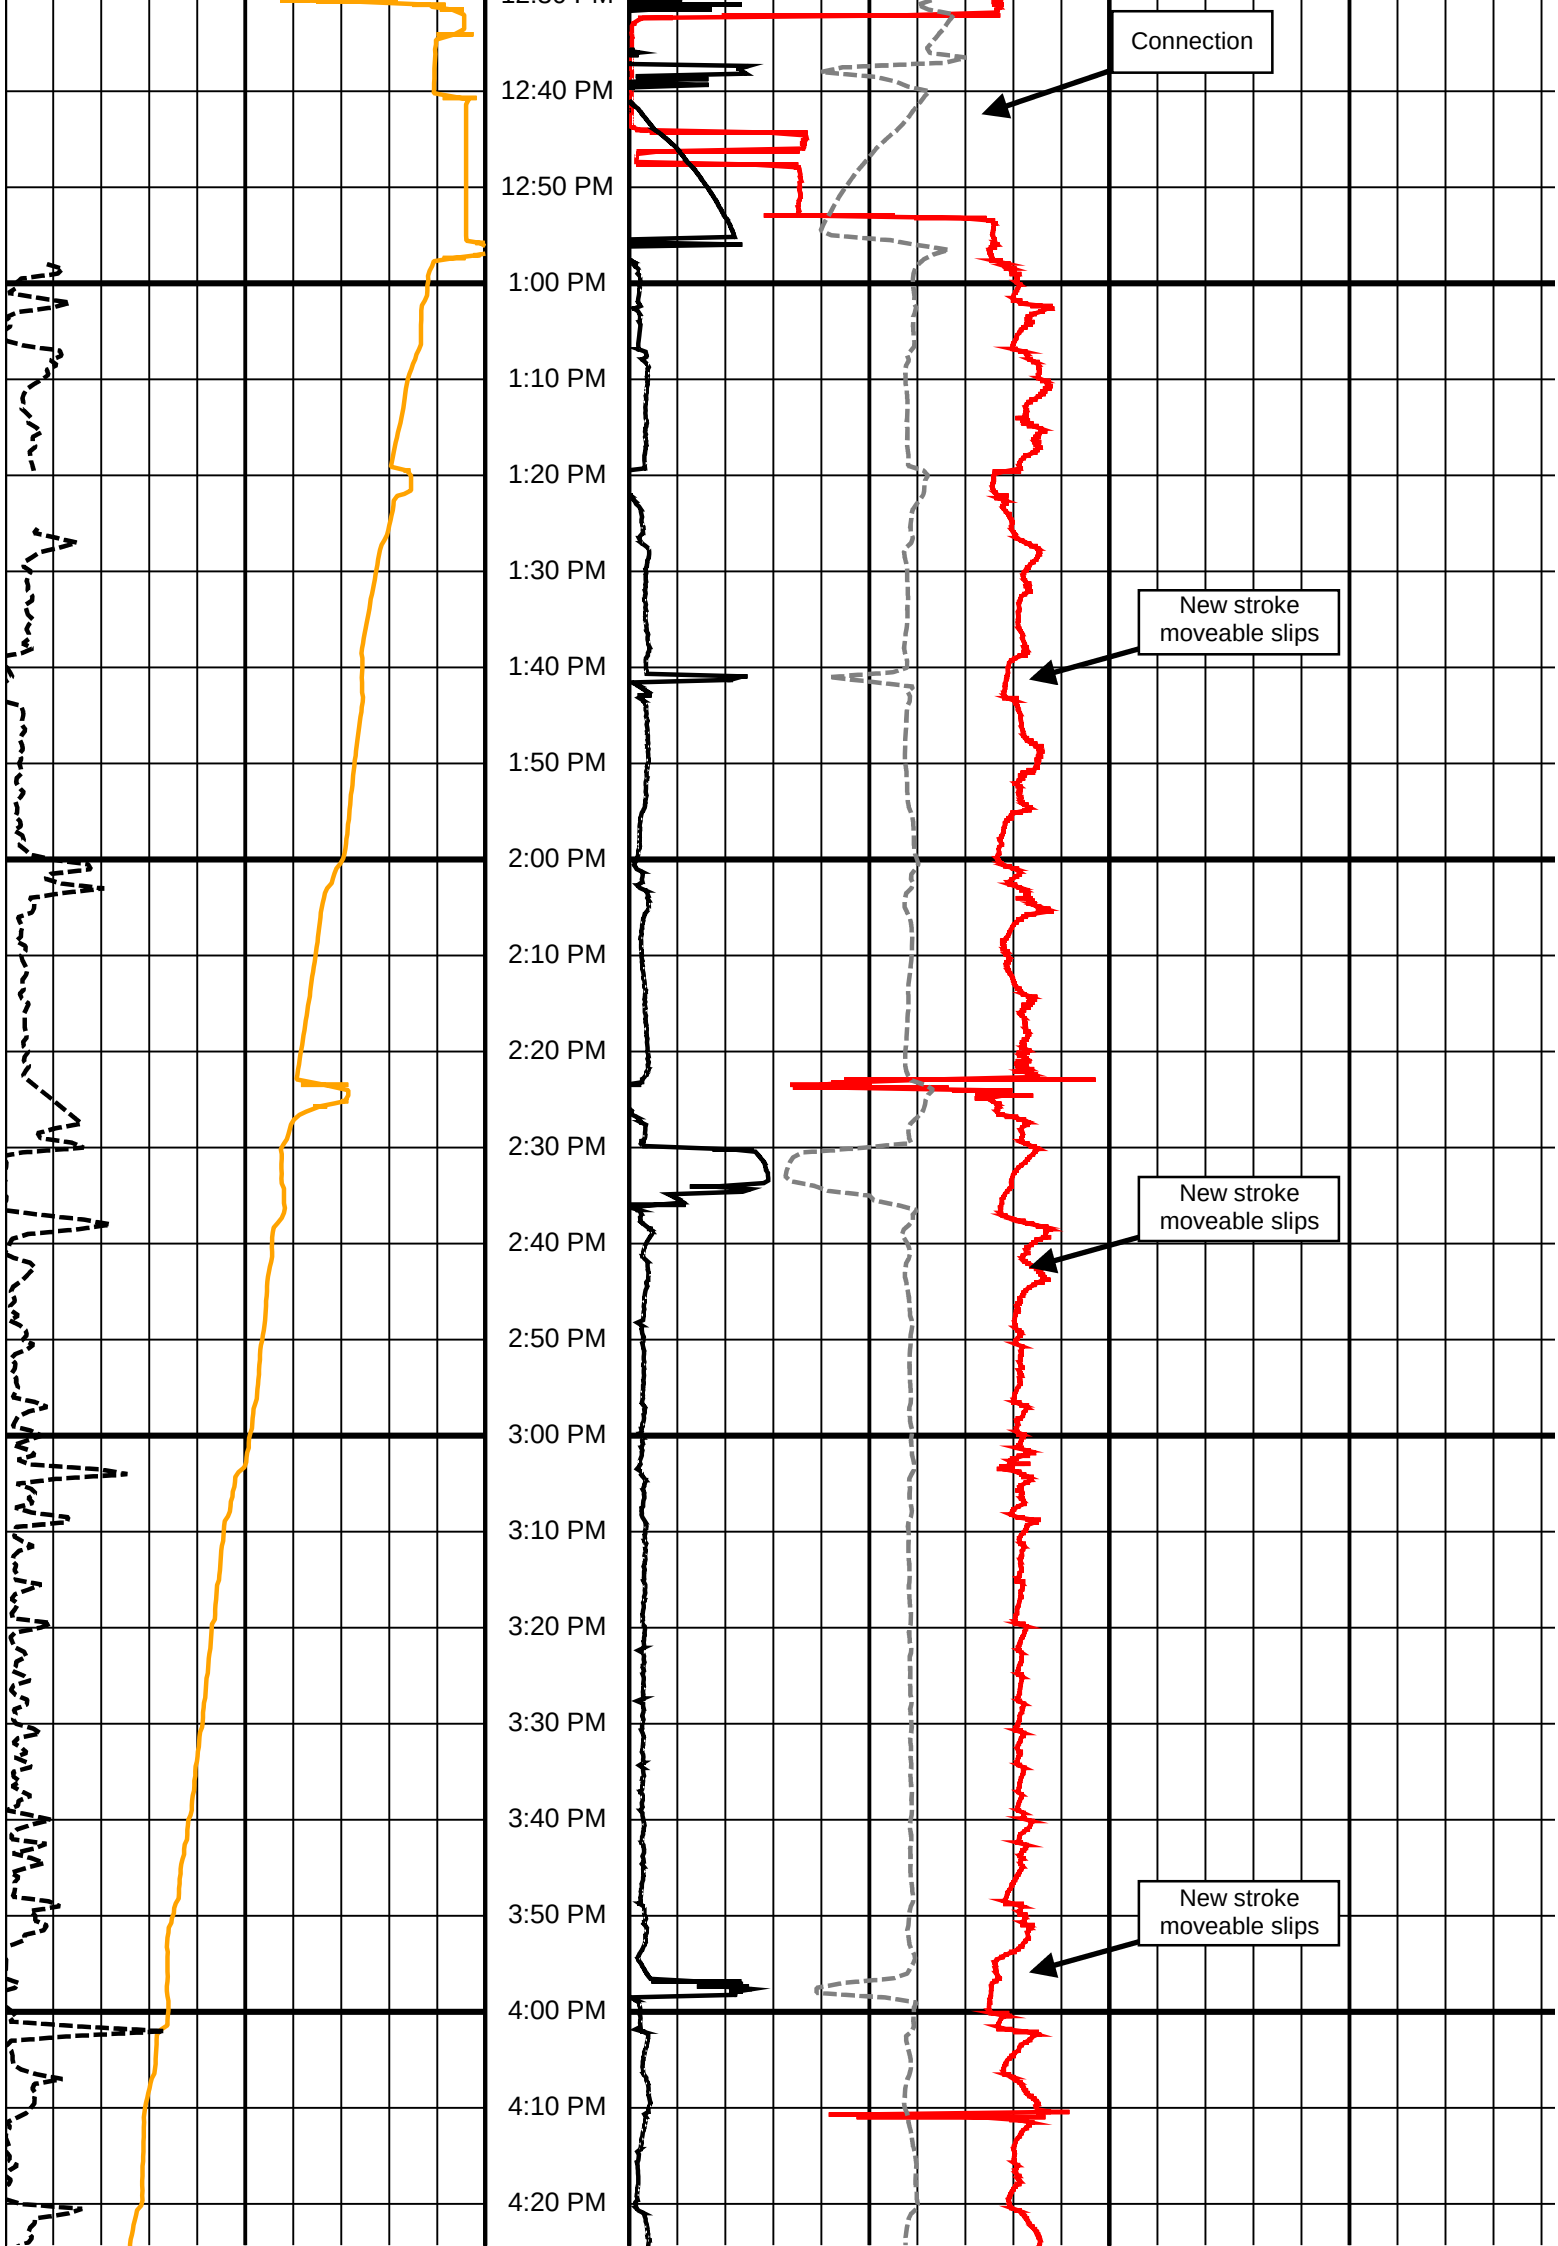


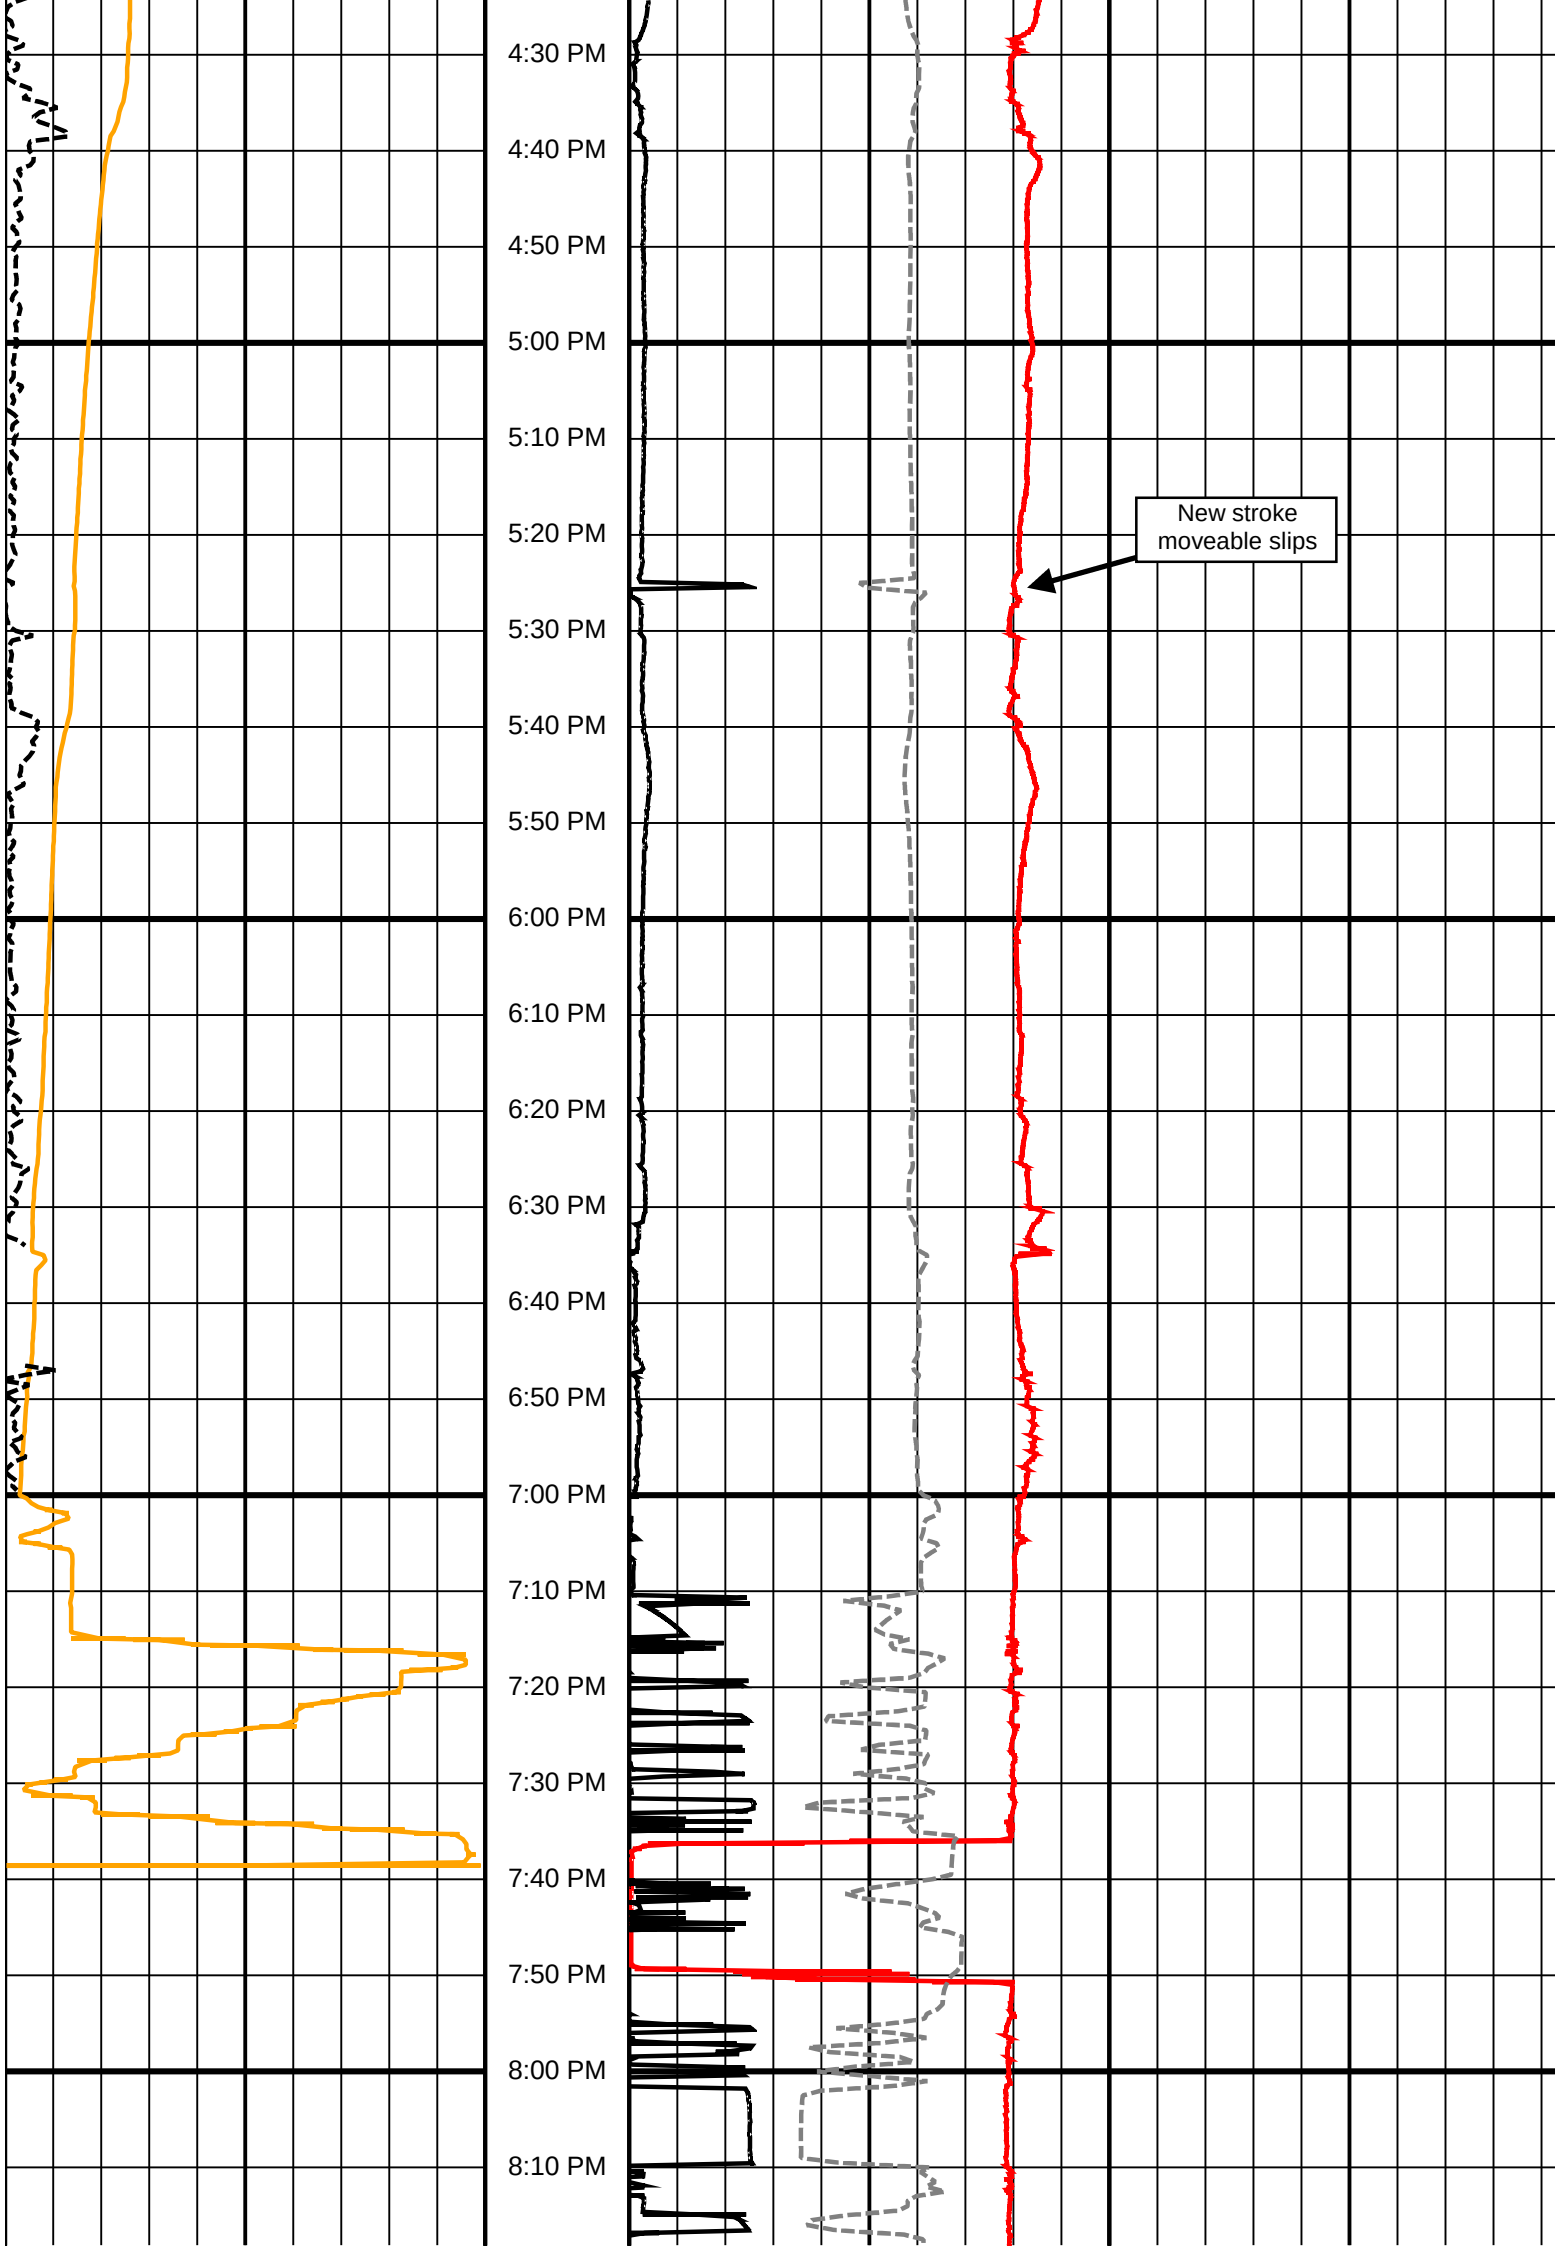

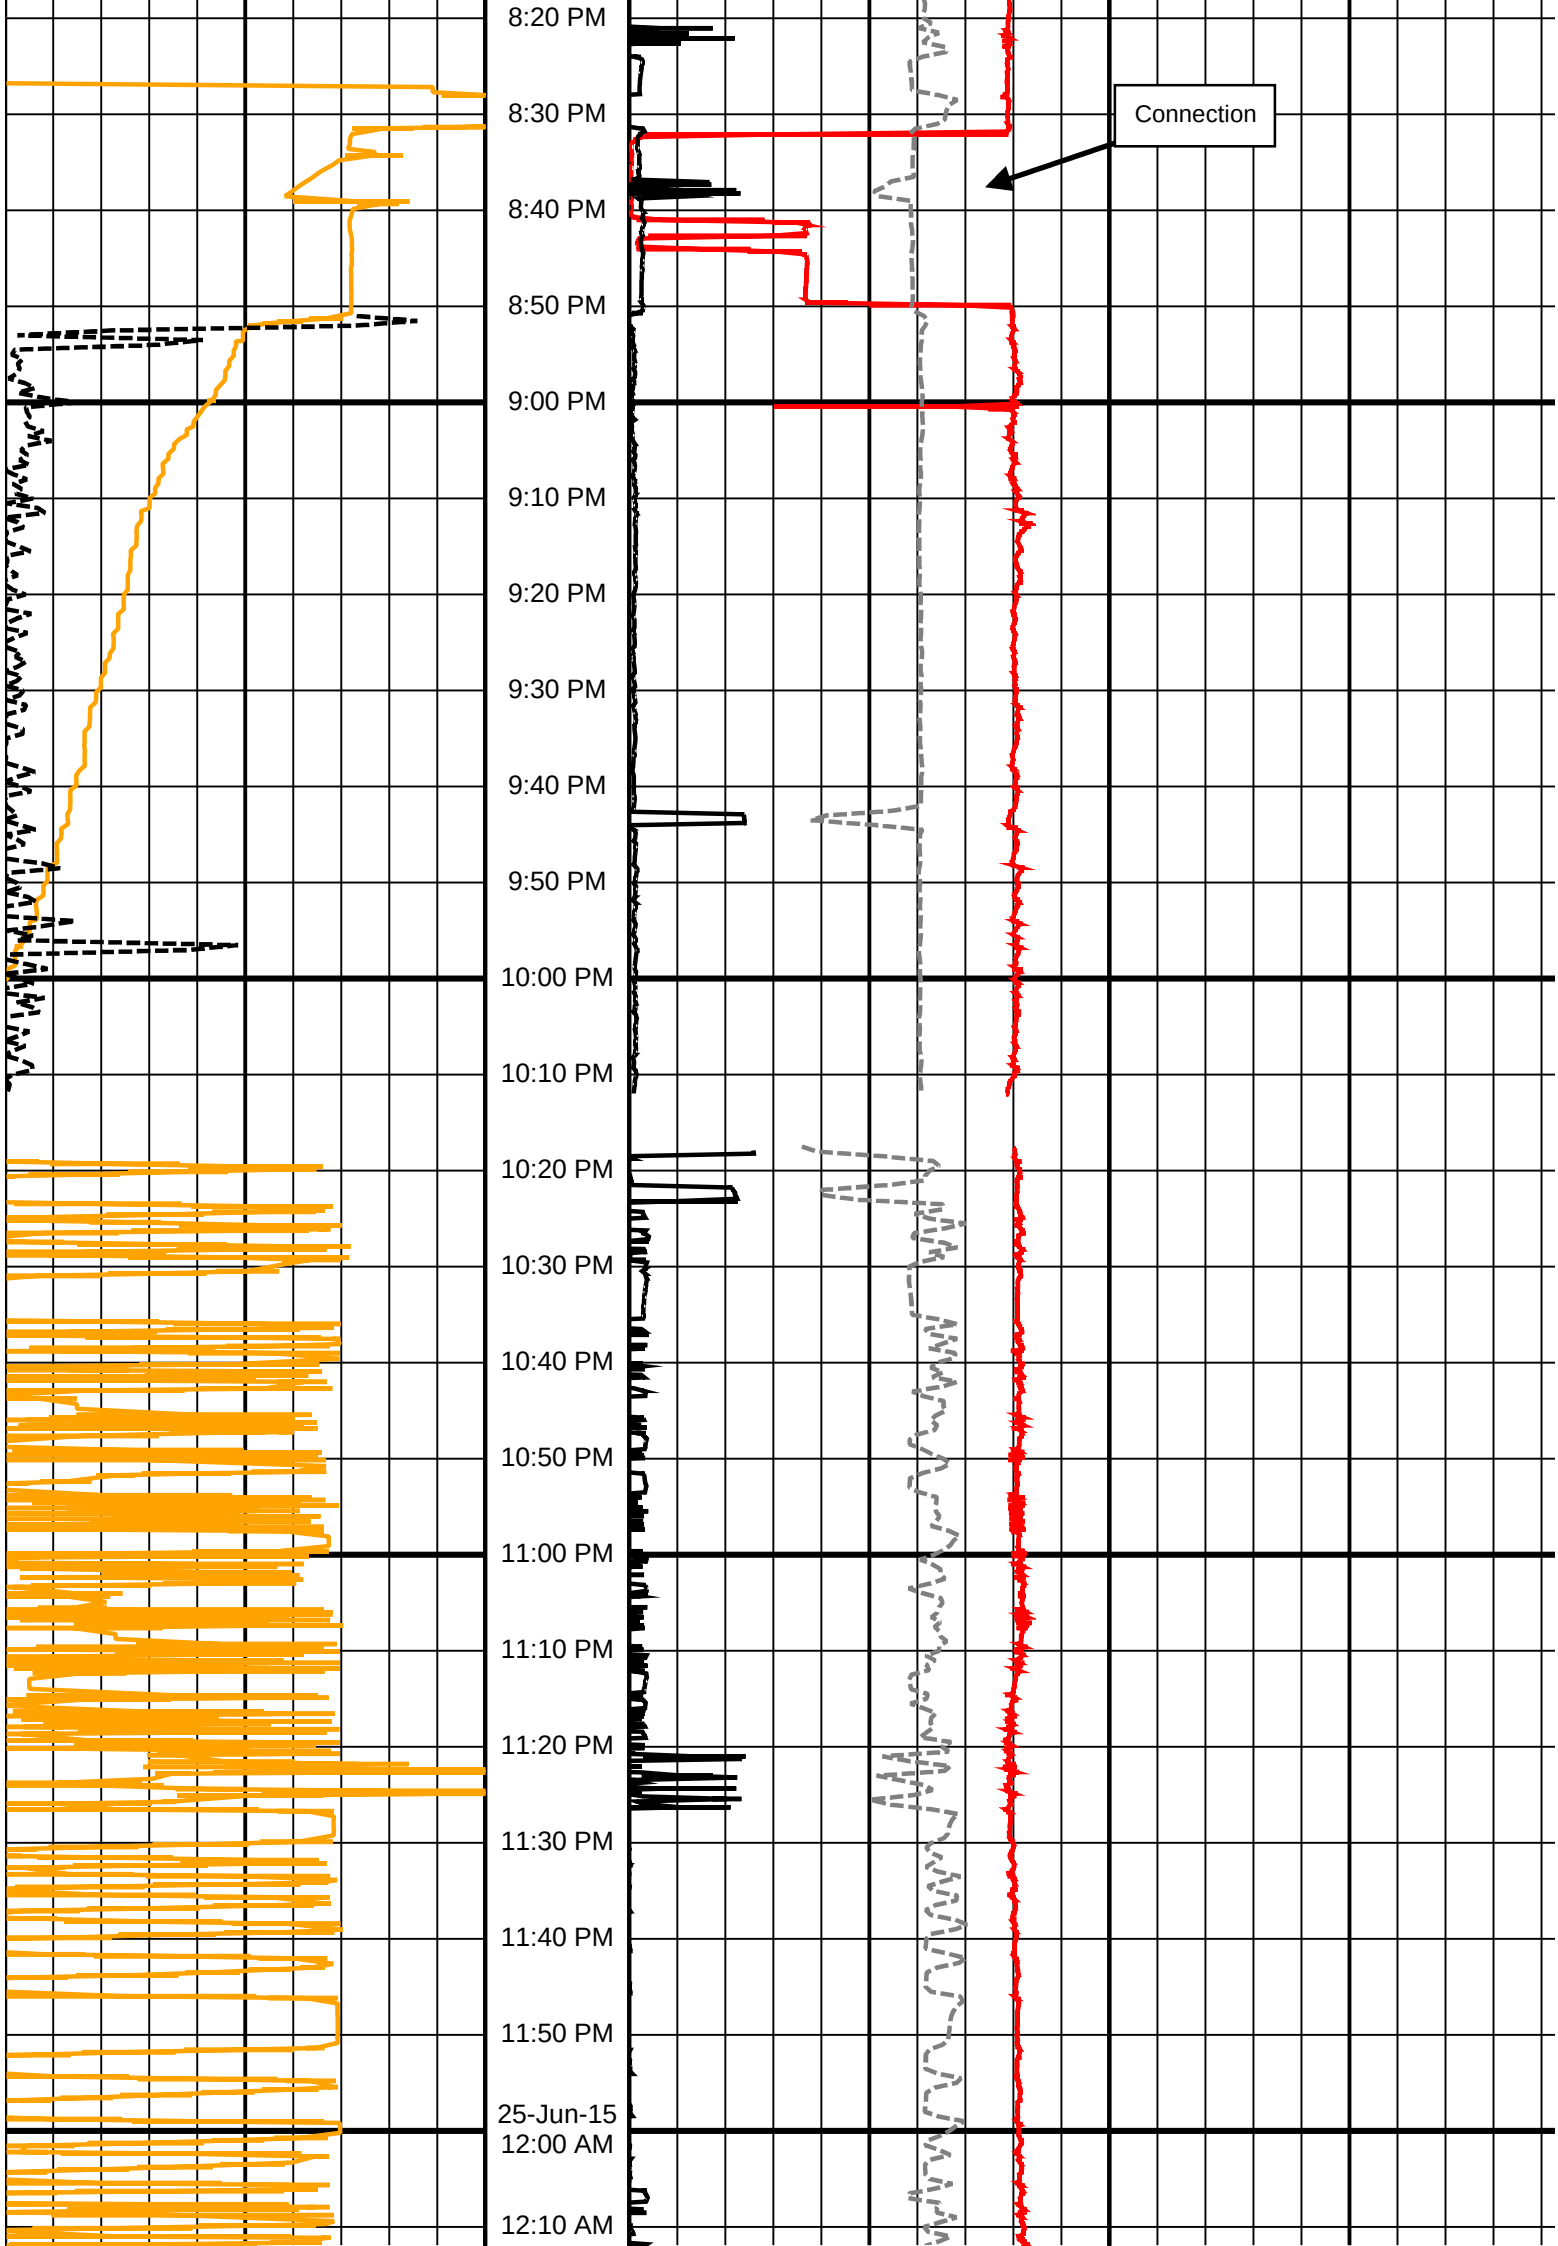

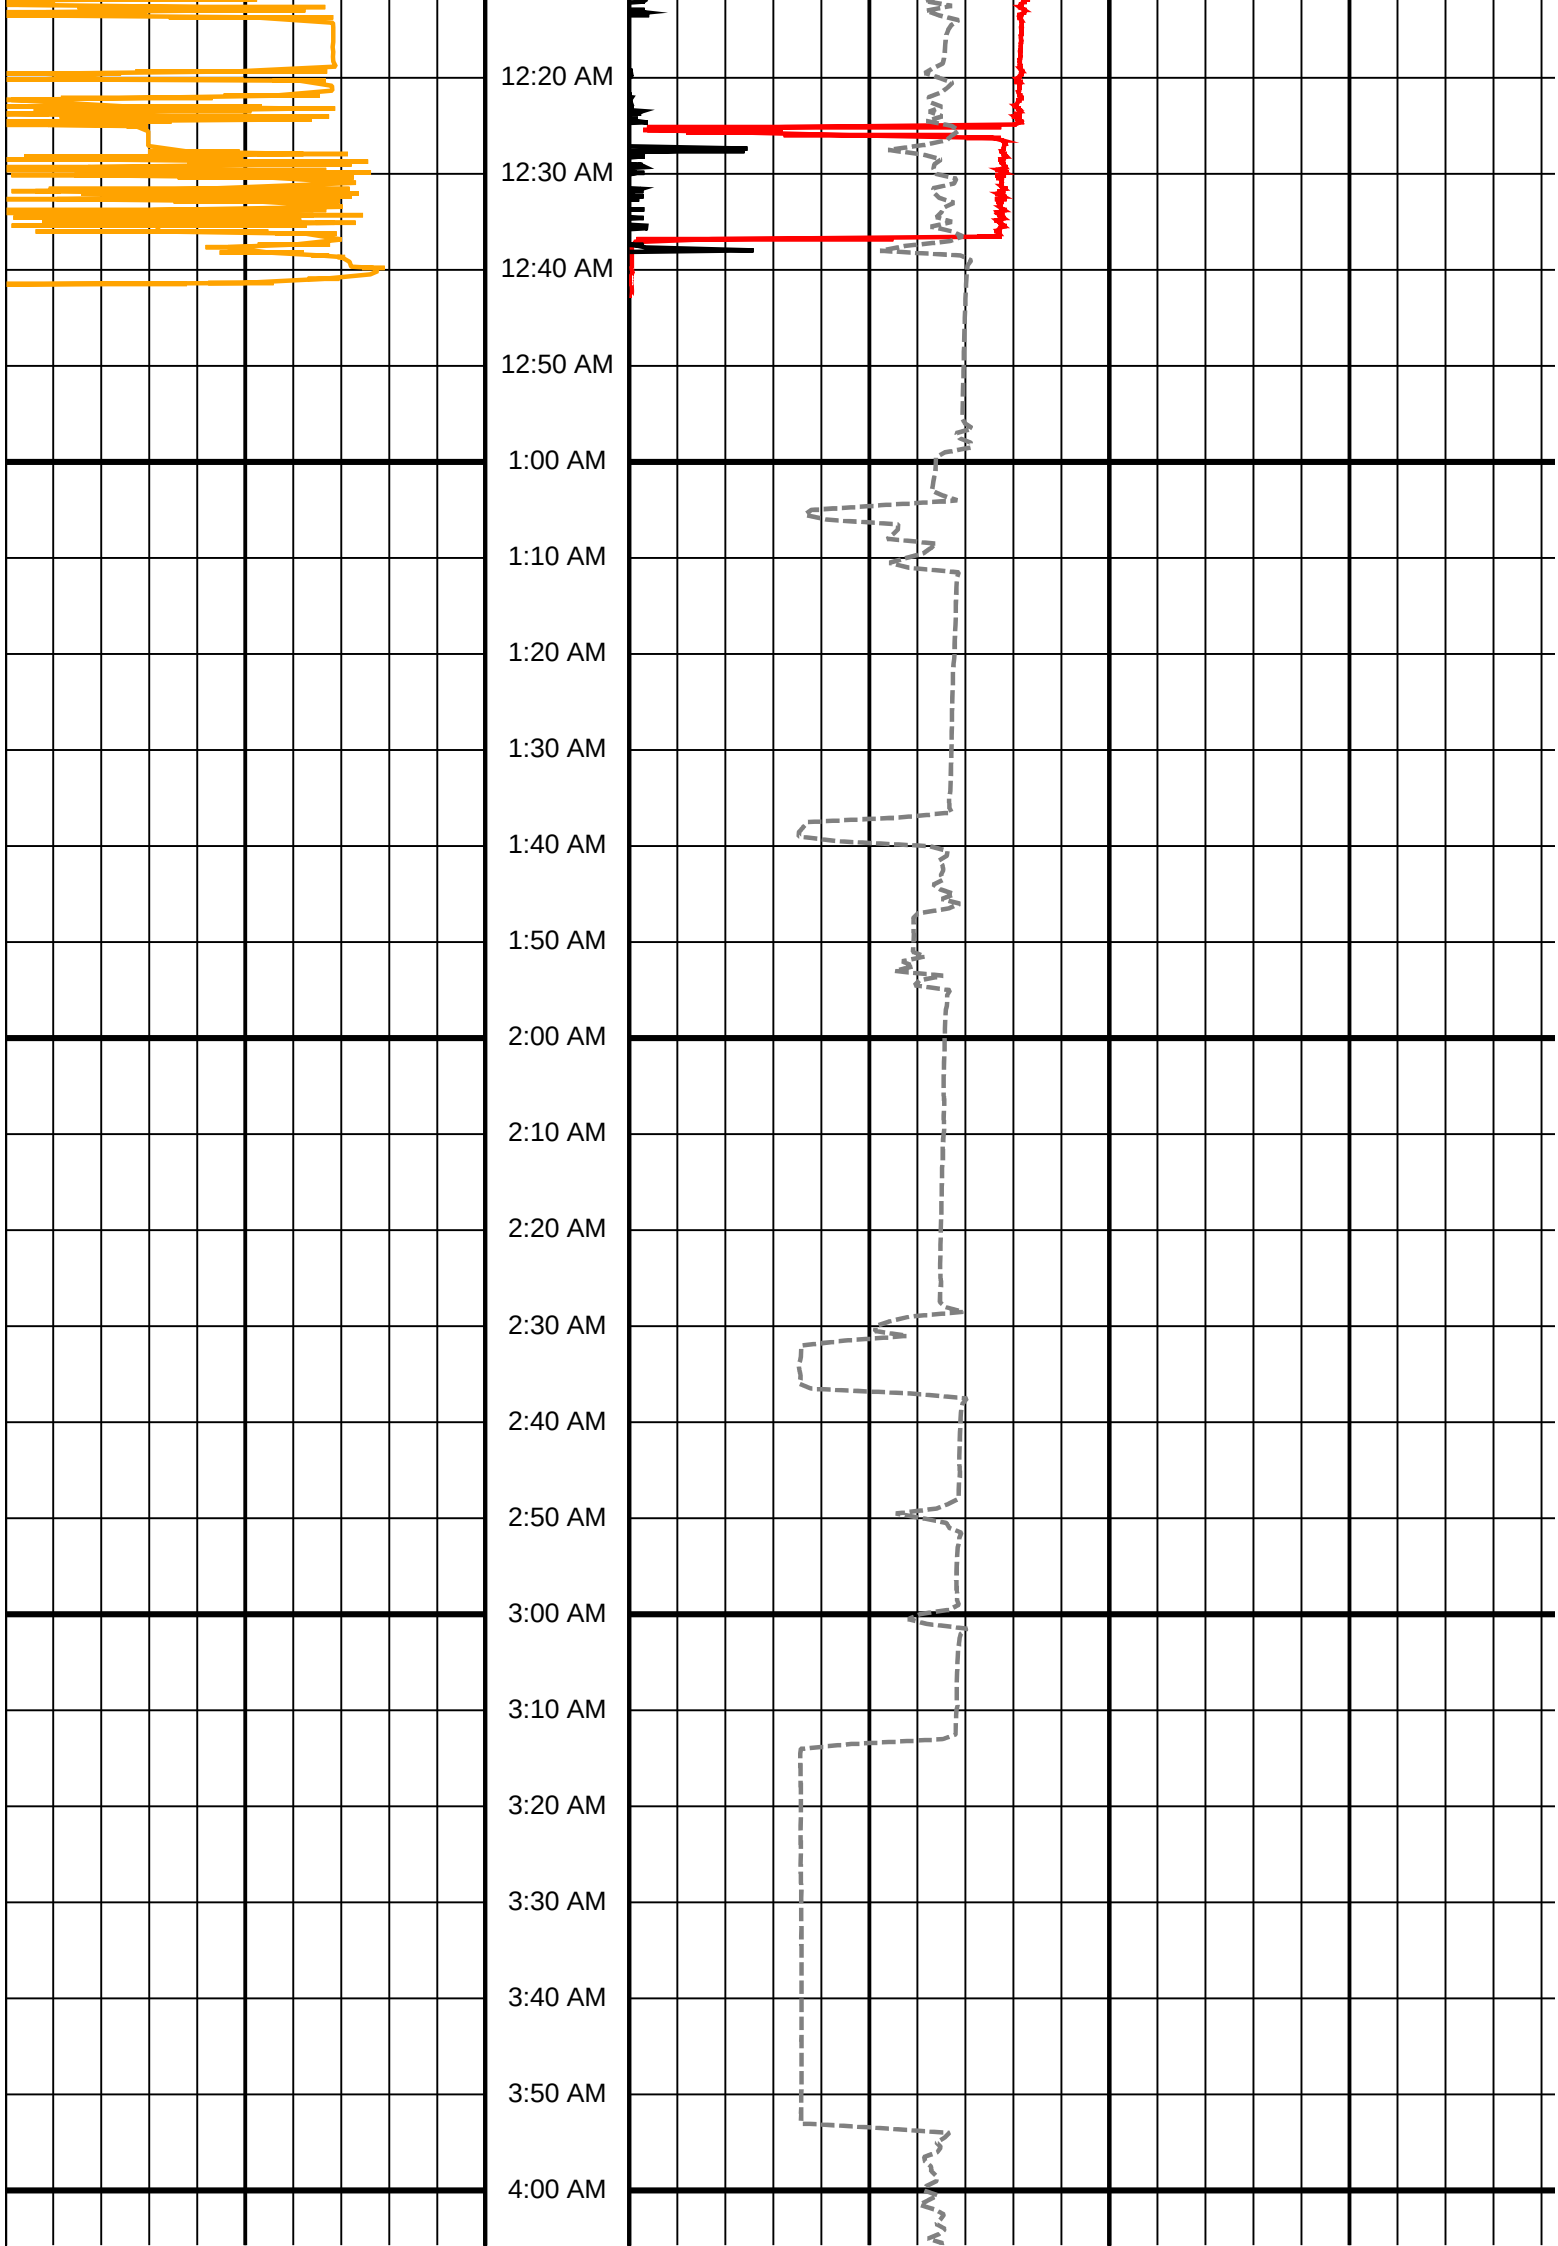

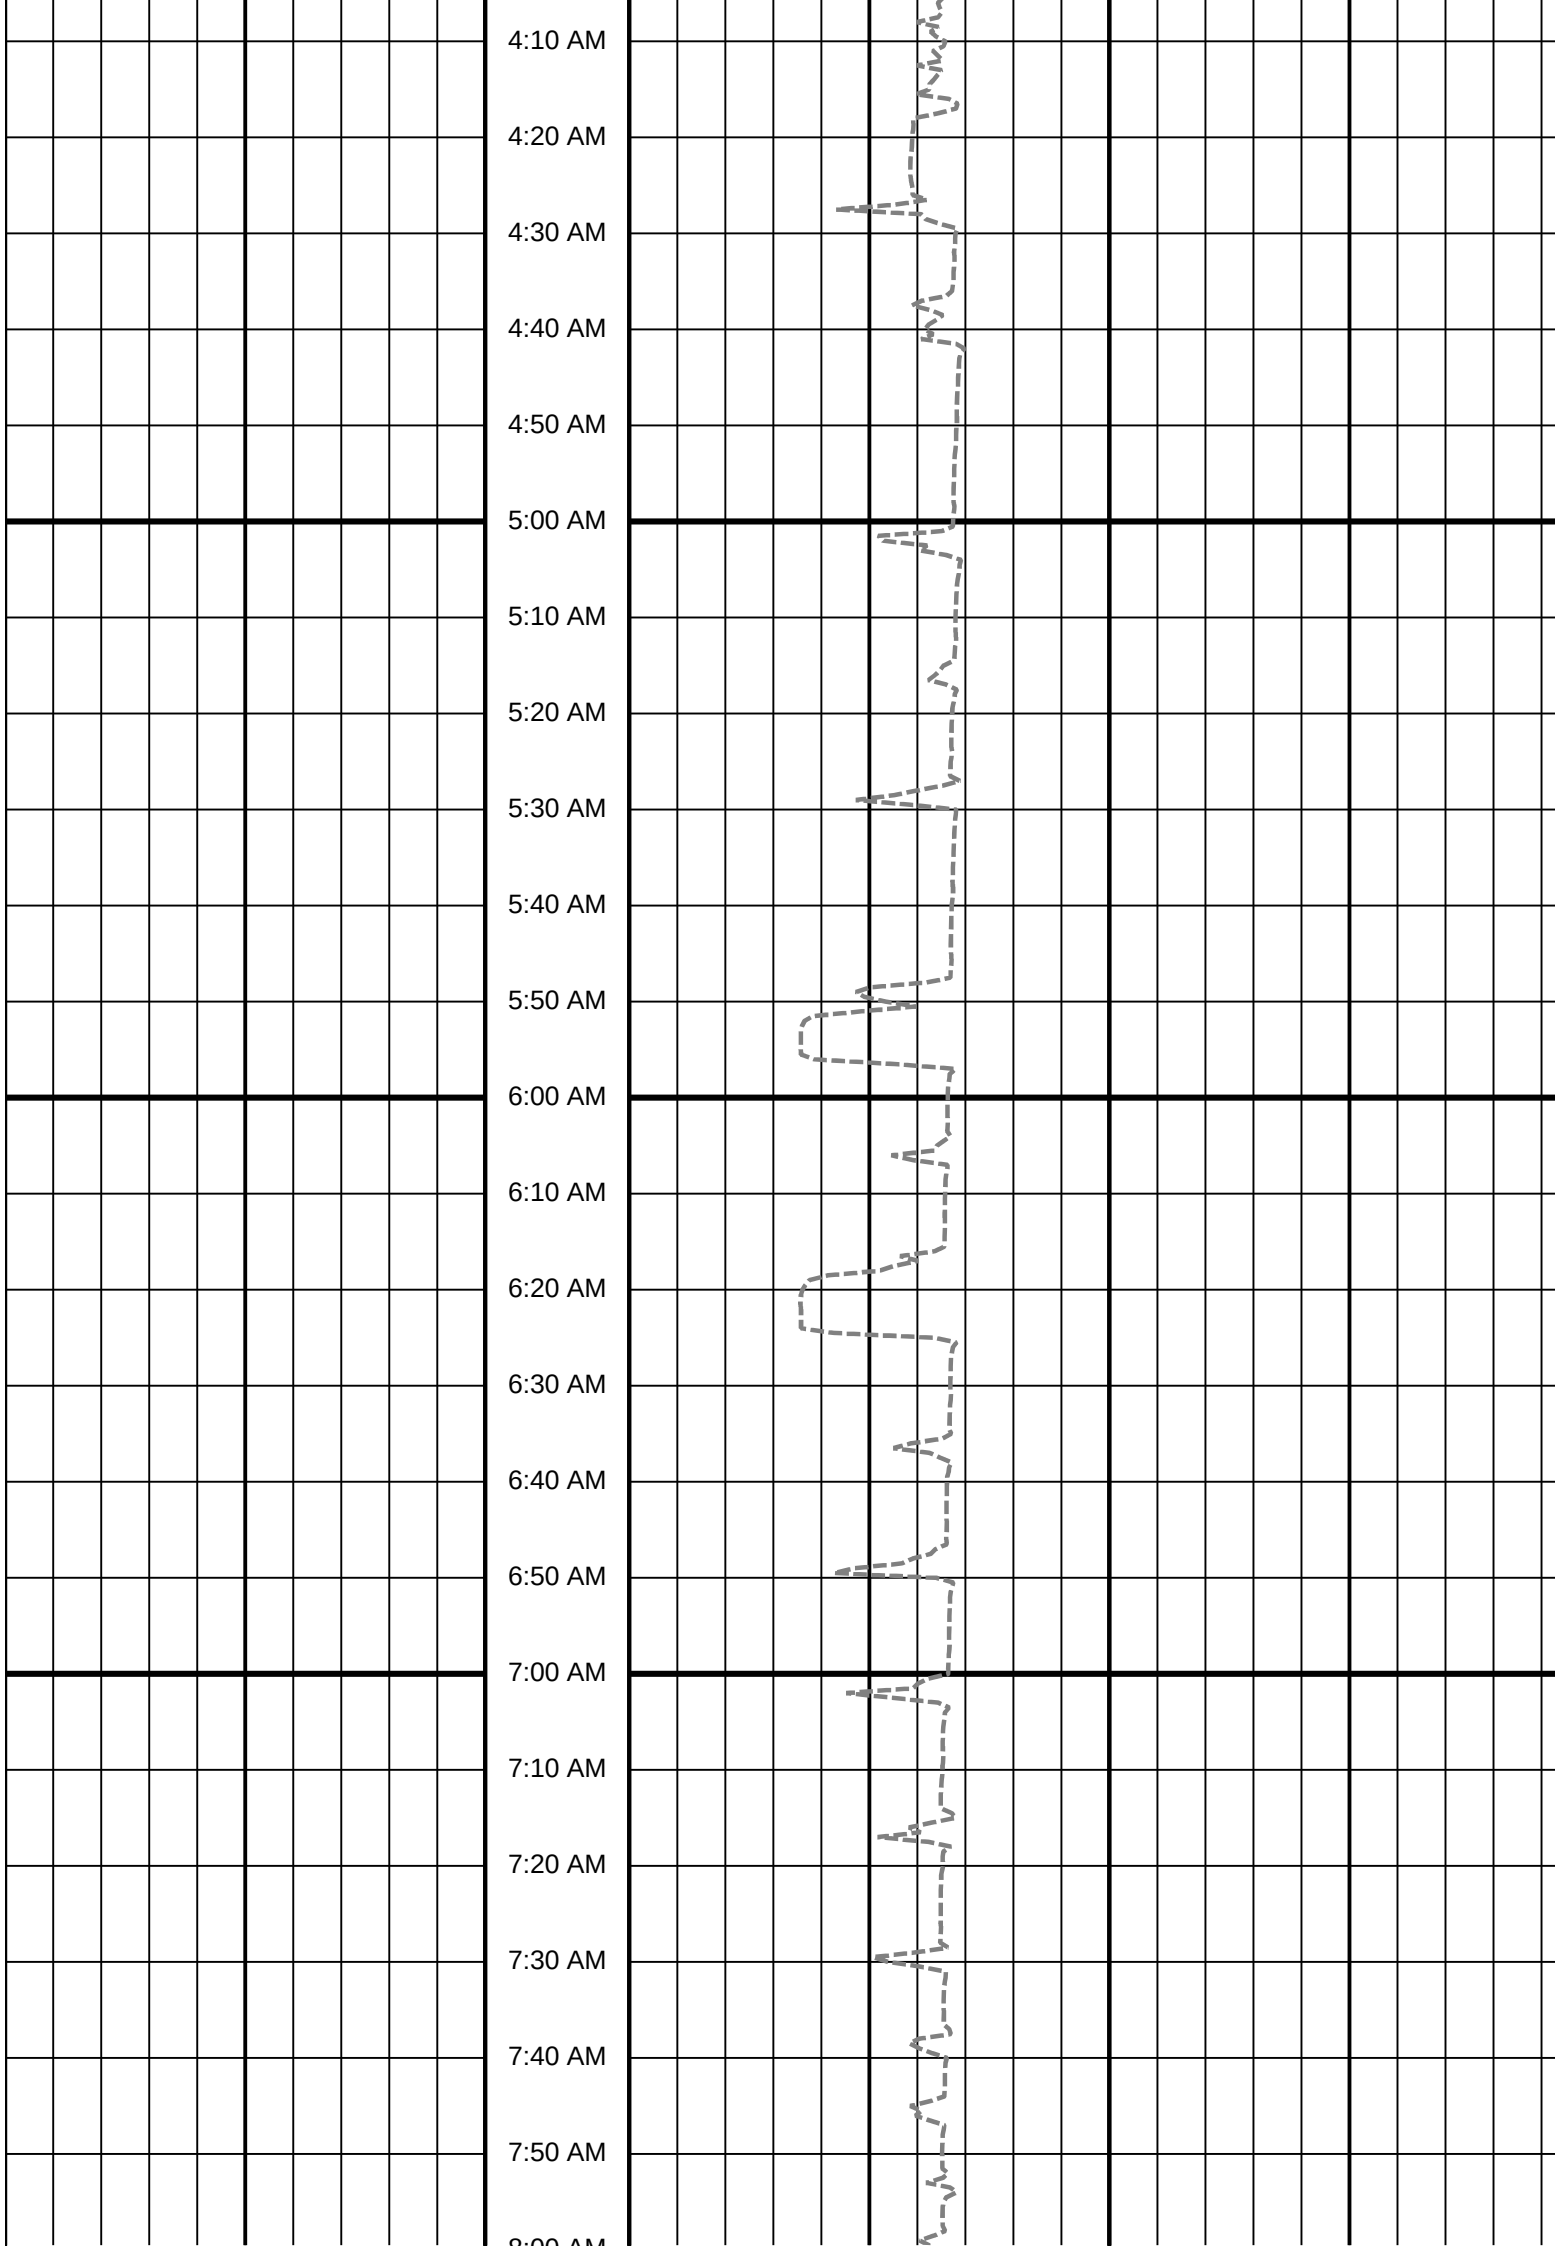

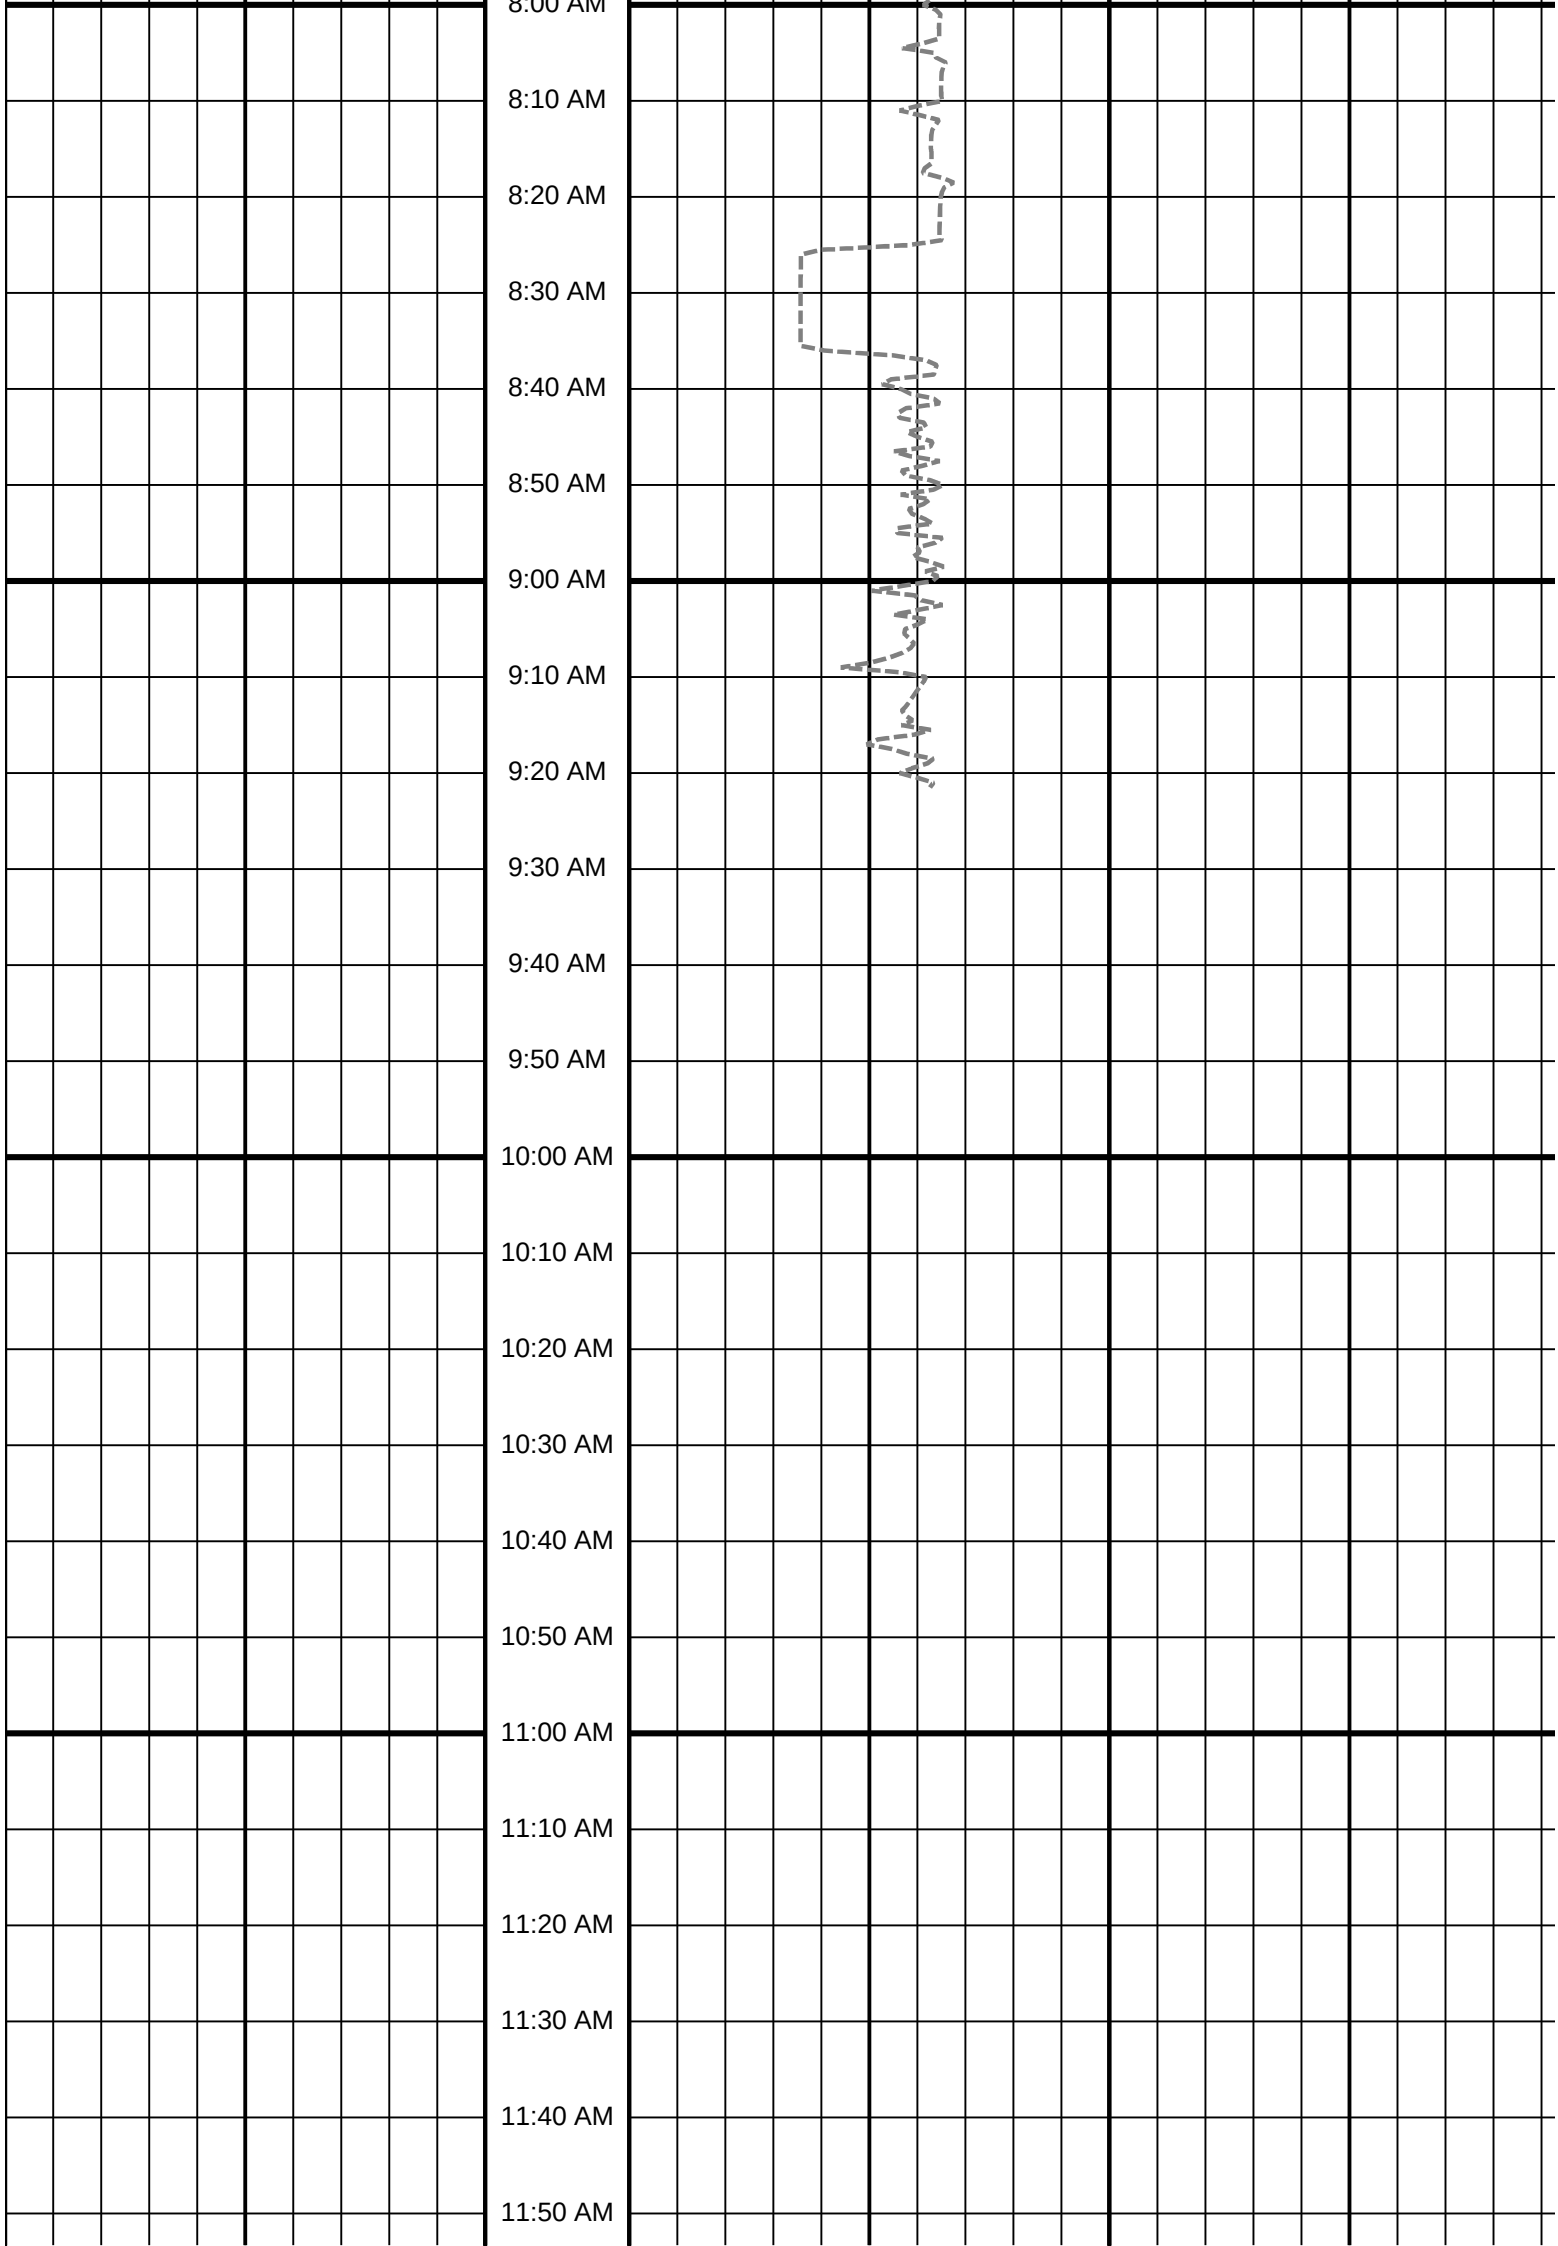

[illegible]